
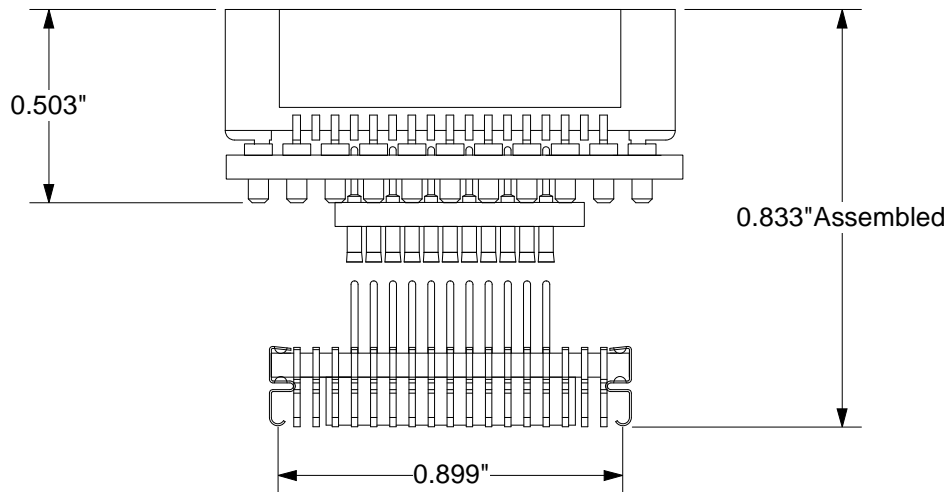


Carrier Adaptor (CA): 68 position PLCC production socket to 68 position PLCC J leaded SM foot. 2 pc. adaptor.

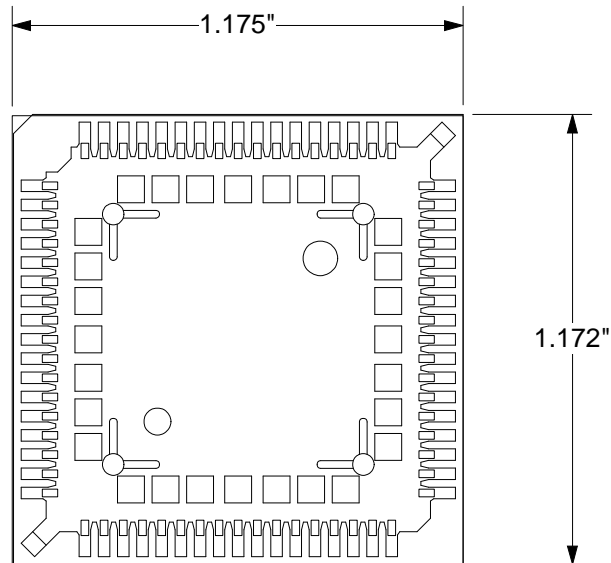


-J (surface-mountable J leaded foot) option

Substrate: FR4/G10, 0.0625"±0.007" thick.

PLCC Socket Pins: Phosphor Bronze, finish: 150 μ" Tin/lead (93/7) over 40μ" Nickel

Base Pins: Brass Alloy 360, 1/2H ; finish: 10μ" Gold over 100/150μ" Nickel

CA-PLCC068-D-J-01 Dwg	Status: Released	Scale:2:1	Rev: A
 <p>© 1997 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	Drawing:EV Swanson		Date: 12/4/97
	File: CA-PLCC068-D-J--01 Dwg		ECO#