






Electrical Ratings	5A @ 120VAC, 28VDC; 2A @ 250VAC See Contact Options
Electrical Life	30,000 cycles typical
Contact Resistance	< 10 mΩ max initial @ 2-4VDC, 100mA
Dielectric Strength	1500Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C









Actuator	6/6 Nylon
Housing	DAP – Diallyl Phthalate
Cover	Stainless Steel
Contacts	Copper Alloy, Silver Plated
Terminals	Brass, Silver Plated



1
1 = SPDT 2 = DPDT
01 = ON-NONE-ON 02 = ON-NONE-(ON) 03 = ON-OFF-ON
A1 = 5.08mm A2 = 7.24mm A3 = 9.40mm A4 = 3.60mm A7 = 12.32mm D1 = 5.08mm **Only available with DPDT
B = Solder Lug C = PC Pin D = Quick Connect H = Horizontal Mount, Right Angle PC Pin V = Vertical Mount, Right Angle PC Pin S20 = PC Pin with Support Bracket
Q = Silver Plated R = Gold Plated G = Gold over Silver Plated
E = Epoxy Seal
A = No Mounting Ears B = With Mounting Ears

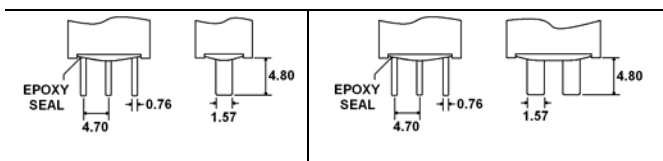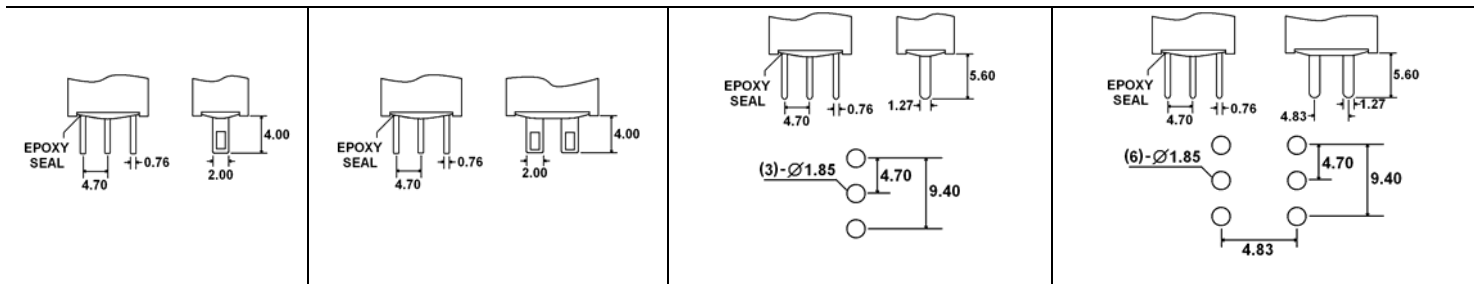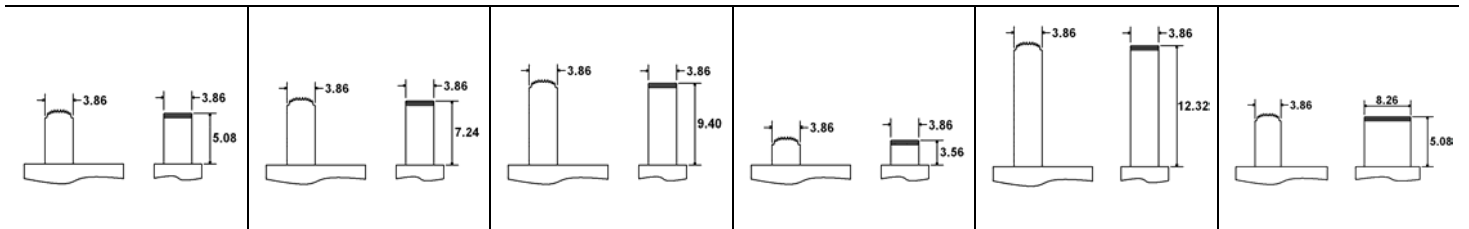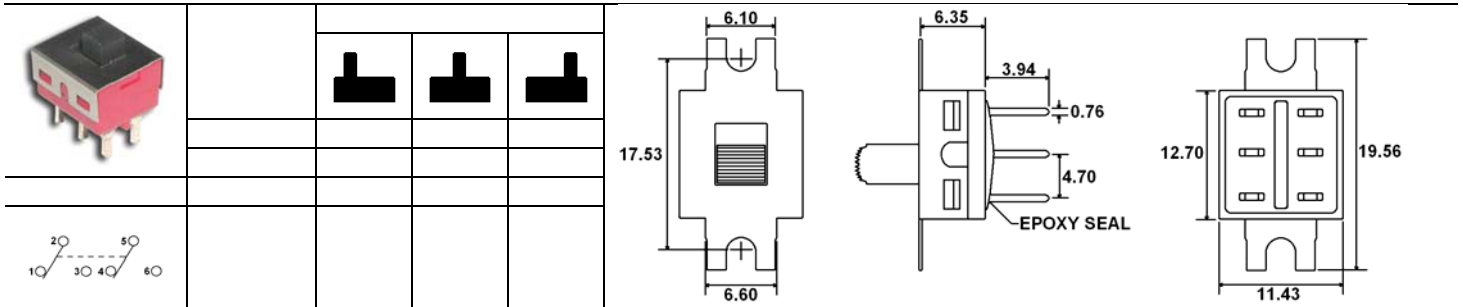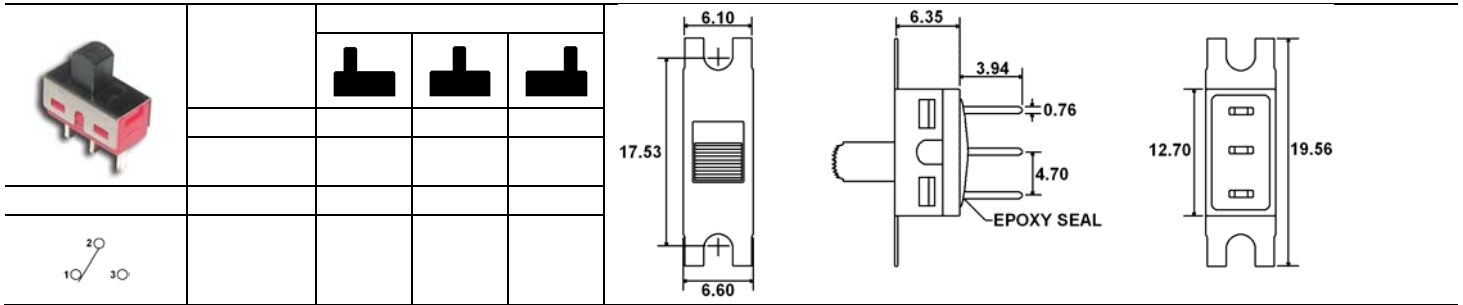

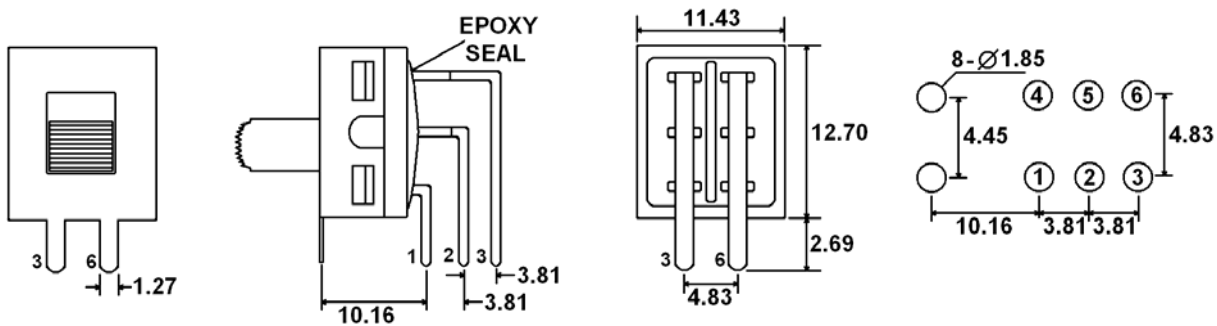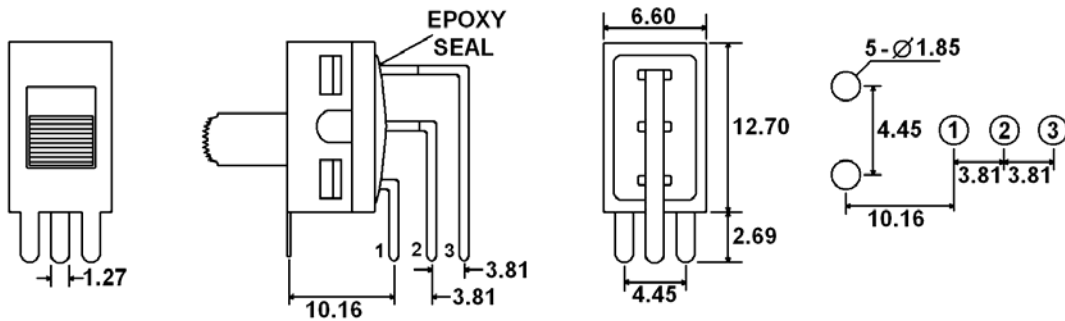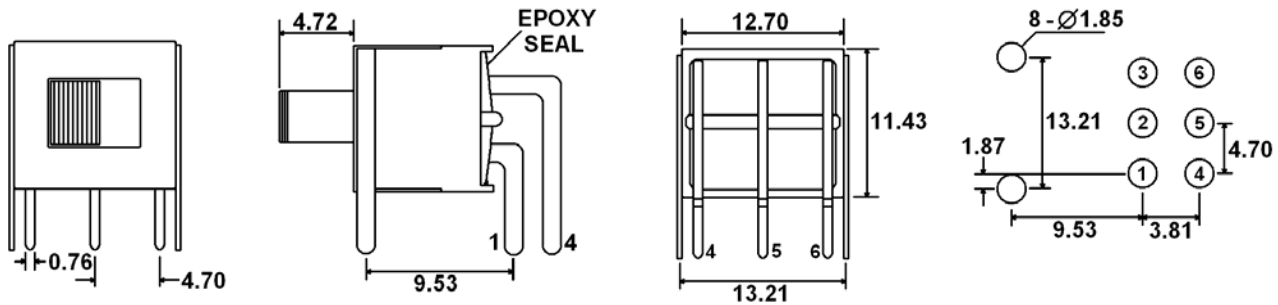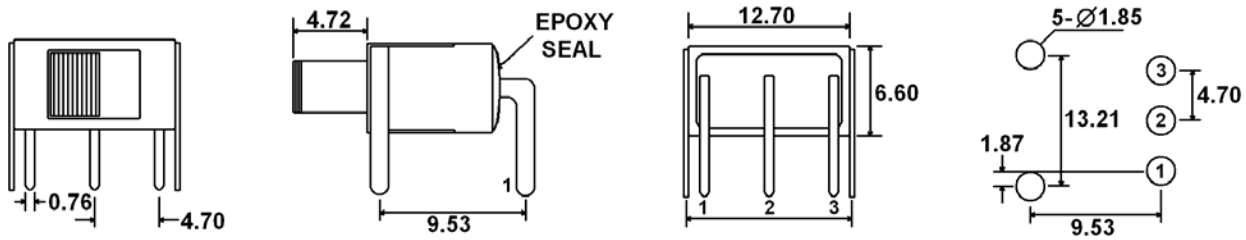

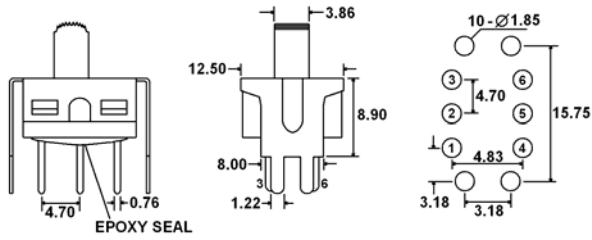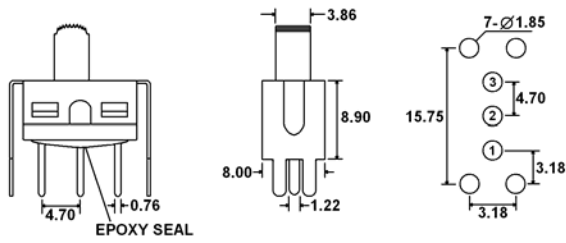

Q	Silver Plating	Silver Plating	5A @ 120VAC, 28VDC; 2A @ 250VAC
R	Gold over Nickel Plating	Gold over Nickel Plating	.4 VA max @ 20VAC or VAC max
G	Gold over Silver Plating	Gold over Silver Plating	.4 VA max @ 20VAC or VAC max or 5A @ 120VAC, 28VDC; 2A @ 250VAC

