


## SPST Switch

P/N: JXWBKG-T-1-6.5-9.5

|                       |                           |
|-----------------------|---------------------------|
| Frequency Range(GHz)  | 6.5~9.5                   |
| Insertion Loss(dB)    | 2.0 max                   |
| Isolation(dB)         | 70 min                    |
| Power Handling(W)     | 0.2 min CW                |
| Switching Time(ns)    | 50 max                    |
| Temperature Range(°C) | -55~+85                   |
| VSWR                  | 1.5 max                   |
| Connectors            | SMA-Female                |
| Control               | TTL Control, "0"ON,"1"OFF |
| Power Supply(V)       | ±5                        |
| Net weight(Kg)        | 0.03 Around               |

## Outline Drawing (Size: mm)

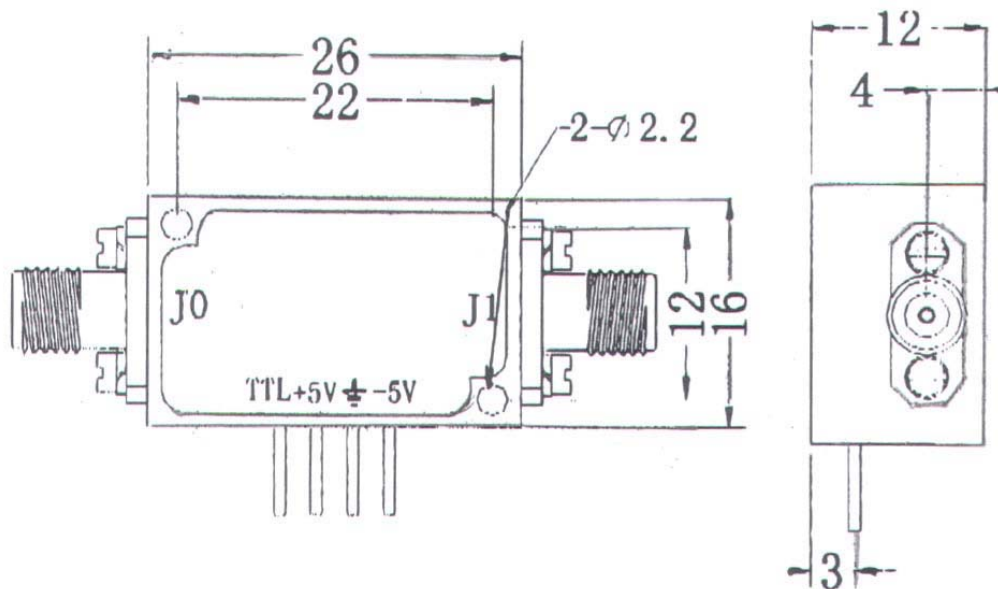

For current data sheets, please contact: [sales@aacix.com](mailto:sales@aacix.com)