

**Description**


- Suitable for low voltage large current drivers
- Excellent  $h_{FE}$  Linearity
- Complementary pair with DN500
- Switching Application

**Ordering Information**

Type NO.	Marking	Package Code
DP500F	P5	SOT-89

**Outline Dimensions**

unit : mm

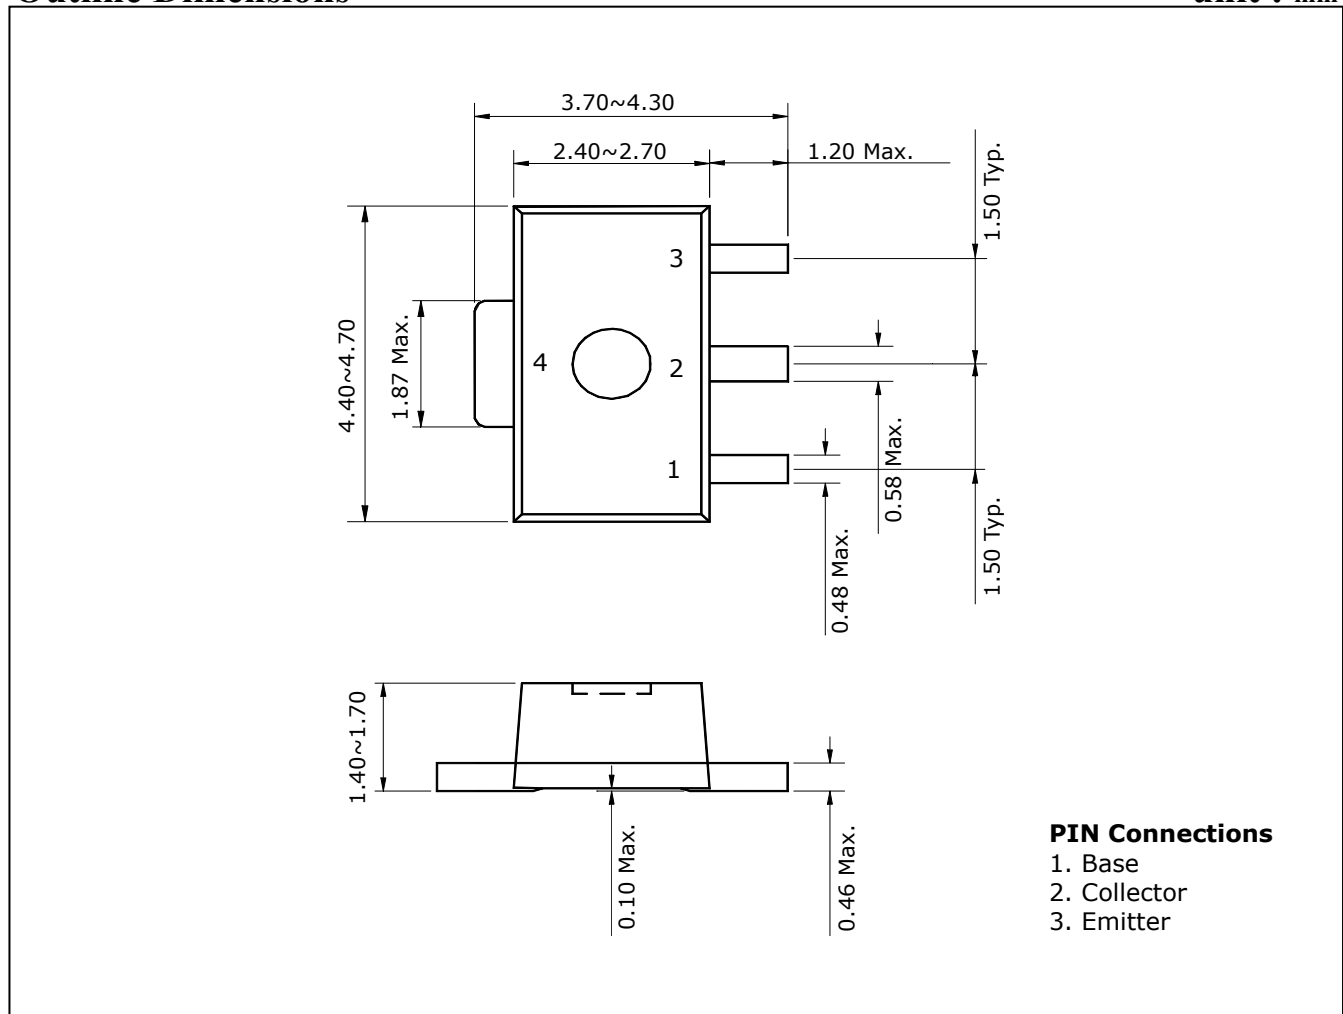

## Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	$V_{CBO}$	-15	V
Collector-Emitter voltage	$V_{CEO}$	-12	V
Emitter-Base voltage	$V_{EBO}$	-5	V
Collector current	$I_C$	-5	A
Collector power dissipation	$P_C$	0.5	W
	$P_C^*$	2	
Junction temperature	$T_J$	150	°C
Storage temperature	$T_{stg}$	-55~150	°C

\* : When mounted on 40×40×0.8 mm ceramic substate

## Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	$BV_{CBO}$	$I_C = -50 \mu A, I_E = 0$	-15	-	-	V
Collector-Emitter breakdown voltage	$BV_{CEO}$	$I_C = -1 mA, I_B = 0$	-12	-	-	V
Emitter-Base breakdown voltage	$BV_{EBO}$	$I_E = -50 \mu A, I_C = 0$	-5	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -12V, I_E = 0$	-	-	-1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = -5V, I_C = 0$	-	-	-1	$\mu A$
DC current gain	$h_{FE1}^*$	$V_{CE} = -1V, I_C = -100 mA$	120	-	700	-
	$h_{FE2}$	$V_{CE} = -1V, I_C = -3A$	40	-	-	-
Collector-Emitter on voltage	$V_{CE(sat1)}$	$I_C = -3A, I_B = -150 mA$	-	-	-0.5	V
Base-Emitter on voltage	$V_{BE(sat)}$	$I_C = -3A, I_B = -150 mA$	-	-	-1.2	V
Transition frequency	$f_T$	$V_{CB} = -5V, I_C = -500 mA$	-	150	-	MHz
Collector output capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0, f = 1 MHz$	-	-	50	pF

\* :  $h_{FE}$  rank / O : 120 ~ 240, Y : 200 ~ 400, G : 350 ~ 700

Electrical Characteristic Curves

Fig. 1  $P_c - T_a$

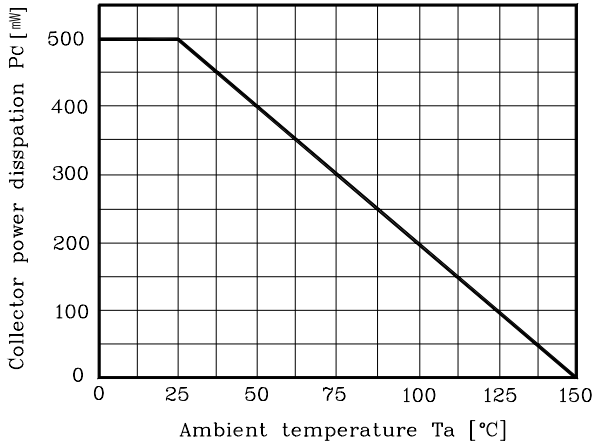


Fig. 2  $I_c - V_{BE}$

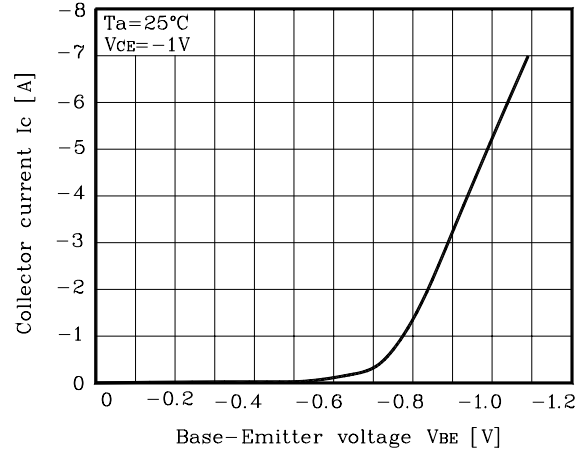


Fig. 3  $h_{FE} - I_c$


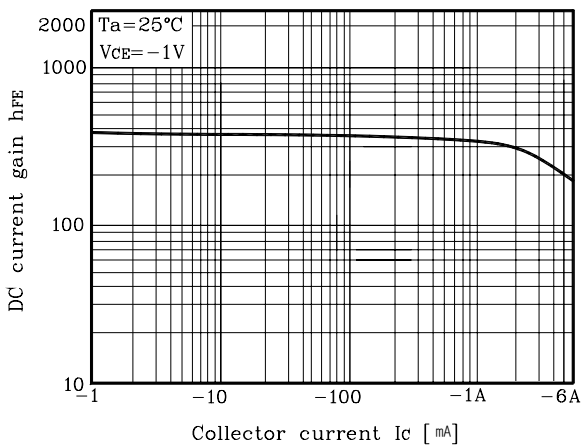


Fig. 4  $V_{CE(sat)} - I_c$

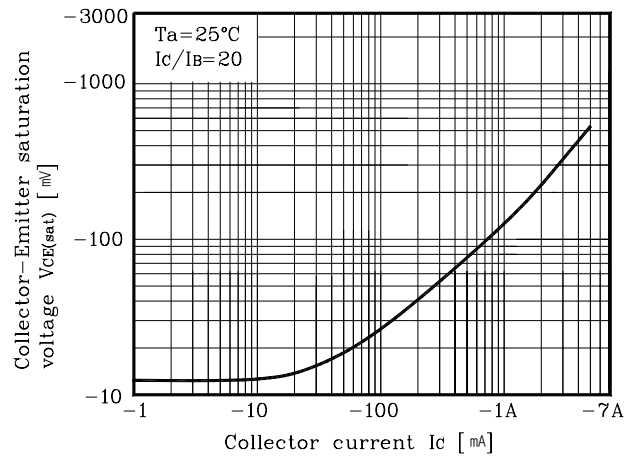

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**