



BAT54TB/ATB/CTB/RTB

SURFACE MOUNT SCHOTTKY BARRIER

VOLTAGE 30 Volts **CURRENT** 0.2 Ampers


SOT-523 Unit: inch (mm)

FEATURES

- Low turn-on voltage
- Fast switching
- PN Junction Guard Ring for Transient and ESD Protection.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case: SOT-523, Plastic
 Terminals: Solderable per MIL-STD-750, Method 2026
 Approx. Weight: 0.002 gram

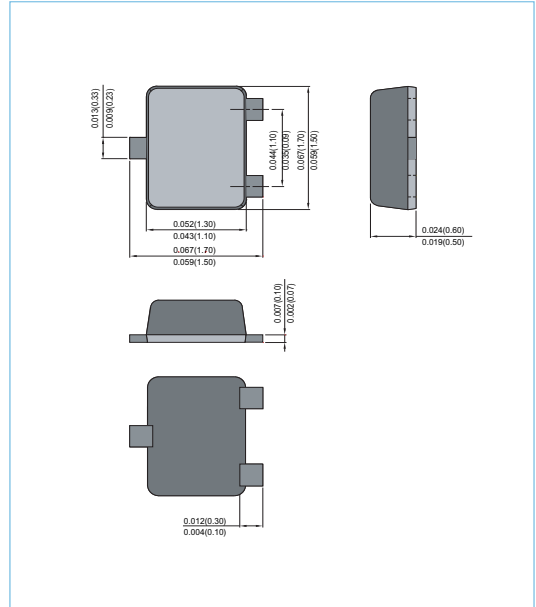


PRELIMINARY

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

Parameter	Symbol	BAT54TB	BAT54ATB	BAT54CTB	BAT54RTB	Units
Marking code		LV	LW	LX	LG	
Peak Repetitive Reverse Voltage	V_{RRM}	30				V
Maximum Average Forward Current at $T_A=75^\circ\text{C}$	I_o	0.2				A
Peak Forward Surge Current, 1.0s (JEDEC method)	I_{FSM}	0.6				A
Maximum Instantaneous Forward Voltage @ $I_F=1\text{mA}$ @ $I_F=100\text{mA}$	V_F	0.32 1.0				V
Maximum DC Reverse Current at Rated DC Blocking Voltage@ $V_R=25\text{V}$	I_R	2.0				μA
Junction Capacitance : at $V_R=1\text{V}$	C_J	10				pF
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	833				$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +125				$^\circ\text{C}$
Circuit Figure		Single	Common Anode	Common Cathode	Series(Rev)	

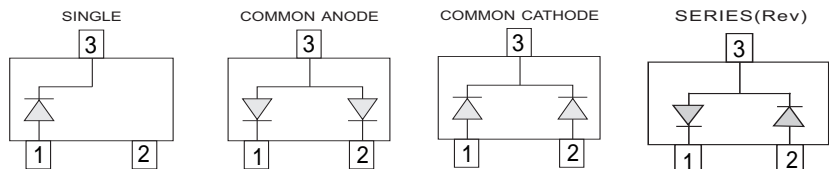



BAT54TB/ATB/CTB/RTB

PRELIMINARY

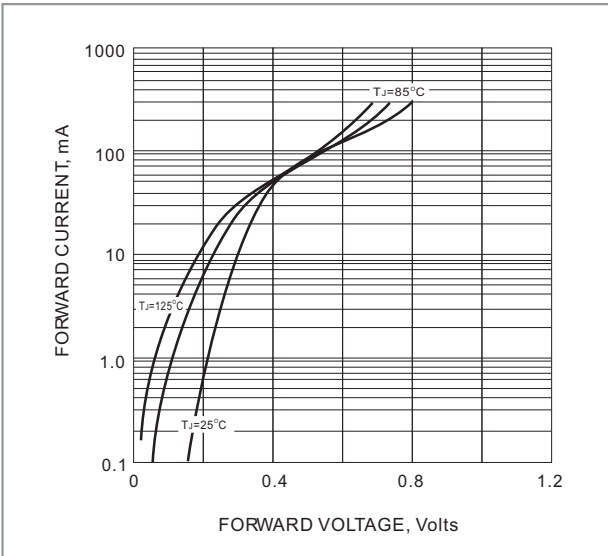


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

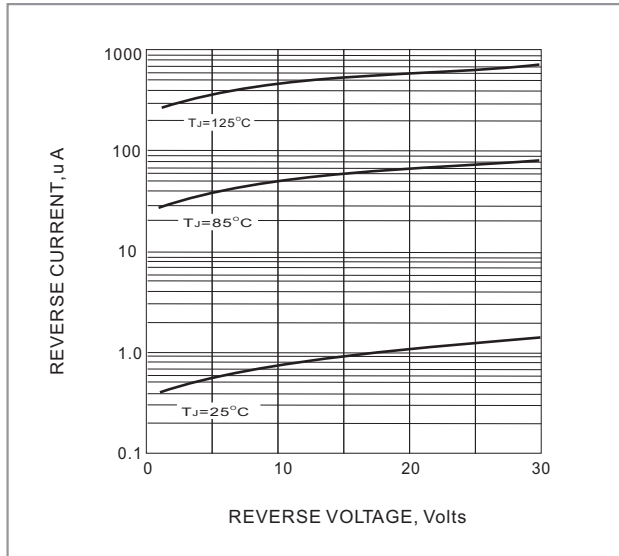


FIG. 2-TYPICAL REVERSE CHARACTERISTICS

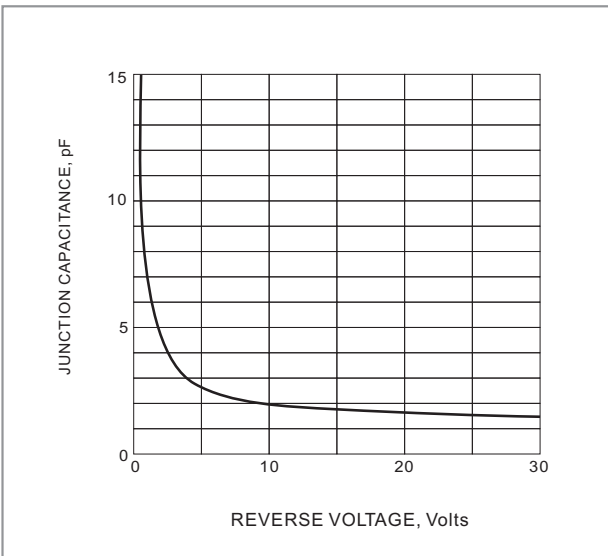


FIG. 3 TYPICAL JUNCTION CAPACITANCE


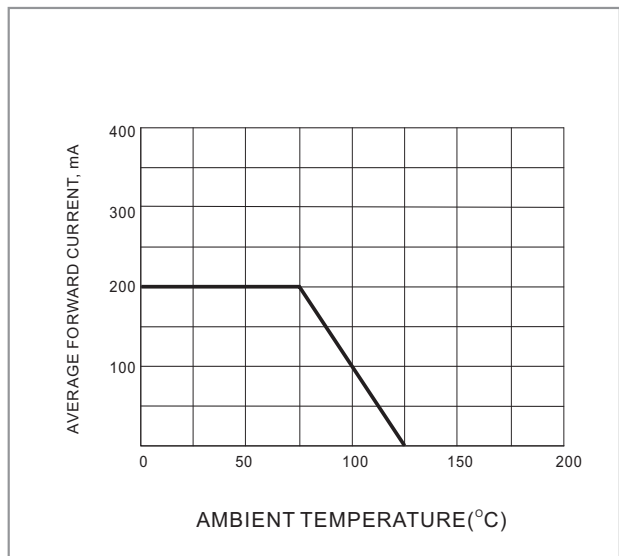


FIG. 4 FORWARD CURRENT DERATING



BAT54TB/ATB/CTB/RTB

MOUNTING PAD LAYOUT

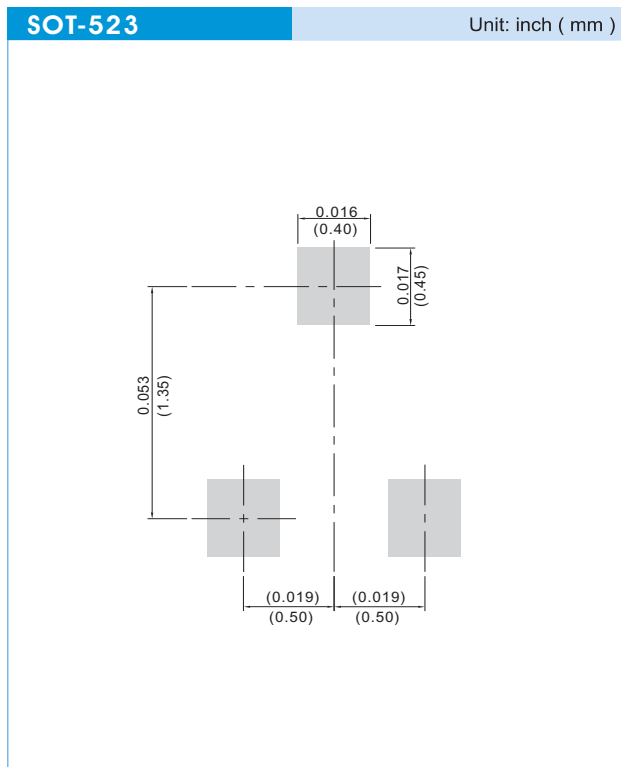

ORDER INFORMATION

- Packing information
T/R - 4K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2010

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.

PRELIMINARY