



RB551V-30

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 30 Volts Forward Current - 200 mAmpere

FEATURES

- Low Turn-on Voltage
- Fast Switching
- Ultra-small surface mount package.
- PN Junction Guard Ring for Transient and ESD Protection

MECHANICAL DATA

- Case: SOD-323, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.004 grams (approx.)

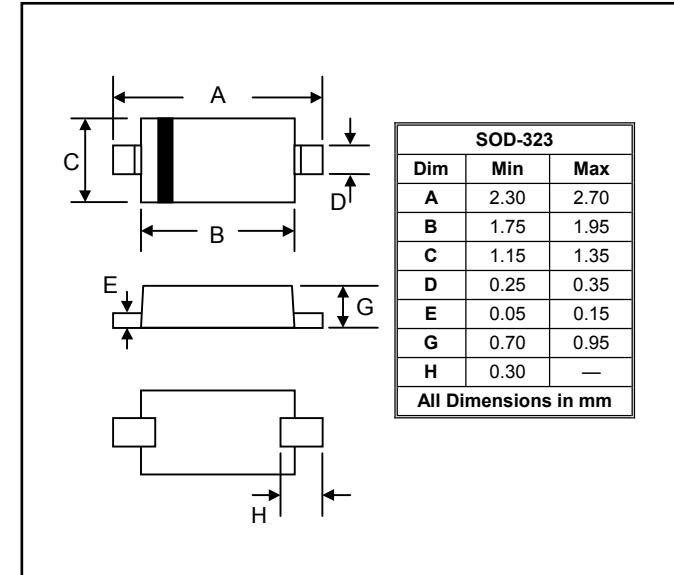

Maximum Ratings @ $T_A=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Reverse Voltage	V_{RM}	30	V
Reverse Voltage	V_R	20	V
Mean Rectifying Current	I_o	0.2	A
Peak Forward Surge Current (60 Hz for 1 Cyc.)	I_{FSM}	5	A
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +150	$^\circ\text{C}$

Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Typ.	Max.	Unit
Forward Voltage at $I_F = 100 \text{ mA}$ at $I_F = 500 \text{ mA}$	V_F V_F	- -	0.36 0.47	V V
Reverse Current at $V_R = 20 \text{ V}$	I_R	-	30	μA
Capacitance Between Terminals at $V_R = 10 \text{ V}$, $f = 1 \text{ MHz}$	C_T	20	-	pF



RB551V-30

RATINGS AND CHARACTERISTIC CURVES

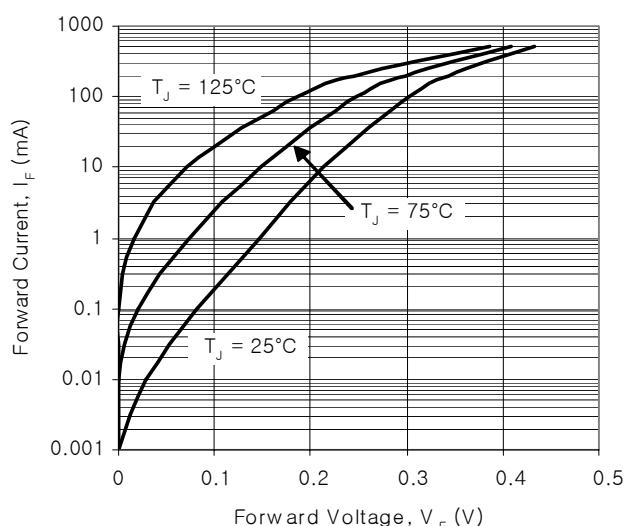


Fig. 1. Typical Forward Characteristics

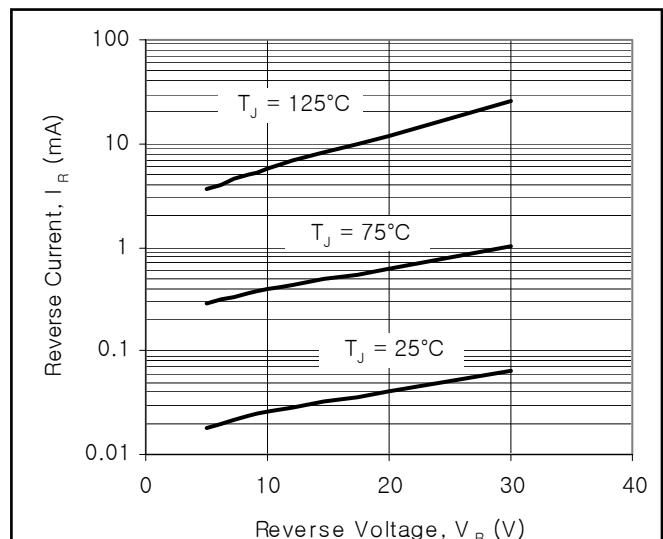


Fig. 2. Typical Reverse Characteristics

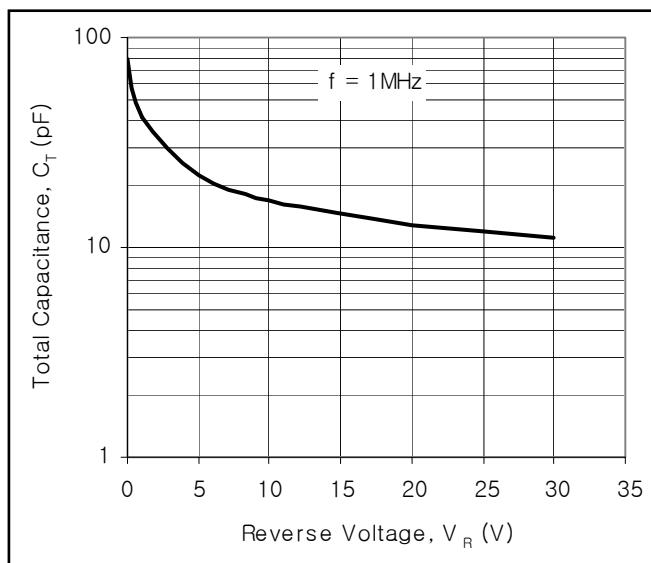


Fig. 3. Typical Capacitance