



## UF200G ~ UF206G

### GLASS PASSIVATED JUNCTION ULTRAFAST RECOVERY RECTIFIERS

**VOLTAGE** 50 to 600 Volts **CURRENT** 2.0 Amperes


**DO-15** Unit: inch(mm)

#### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228.
- Ultra Fast recovery for high efficiency.
- In compliance with EU RoHS 2002/95/EC directives

#### MECHANICAL DATA

- Case: Molded plastic, DO-15
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Band denotes cathode
- Mounting Position: Any
- Weight: 0.014 ounce, 0.397 gram

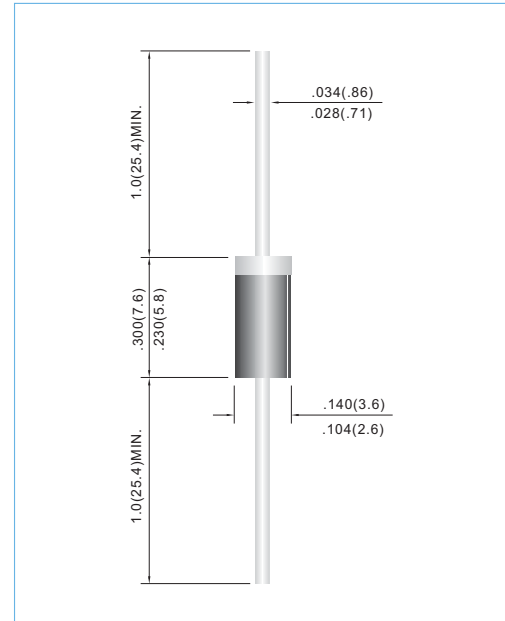

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

PARAMETER	SYMBOL	UF200G	UF201G	UF202G	UF204G	UF206G	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	V
Maximum Average Forward Current .375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{F(AV)}$	2.0					A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	60					A
Maximum Forward Voltage at 2.0A	$V_F$	1.0			1.3	1.7	V
Maximum DC Reverse Current $T_J=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_J=125^\circ\text{C}$	$I_R$	1.0			200		$\mu\text{A}$
Typical Junction capacitance (Note 1)	$C_J$	35					pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	45					$^\circ\text{C} / \text{W}$
Maximum Reverse Recovery Time (Note 3)	$t_{rr}$	50				100	ns
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150					$^\circ\text{C}$


#### NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
2. Thermal Resistance from Junction to Ambient and from Junction to lead length 0.375" (9.5mm) P.C.B. mounted.
3. Reverse Recovery Time  $I_F=.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=.25\text{A}$




# UF200G ~ UF206G


## RATING AND CHARACTERISTIC CURVES

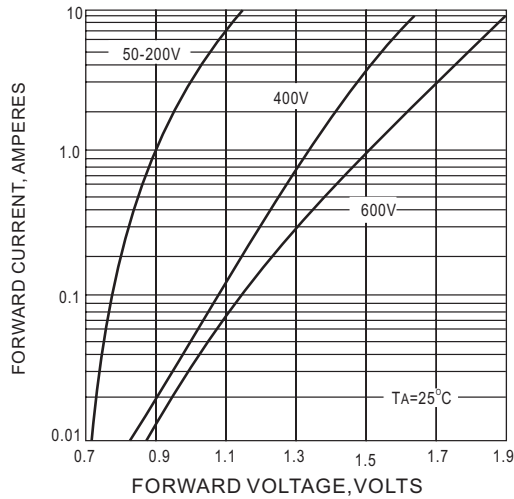


**Fig. 1 FORWARD CHARACTERISTICS**

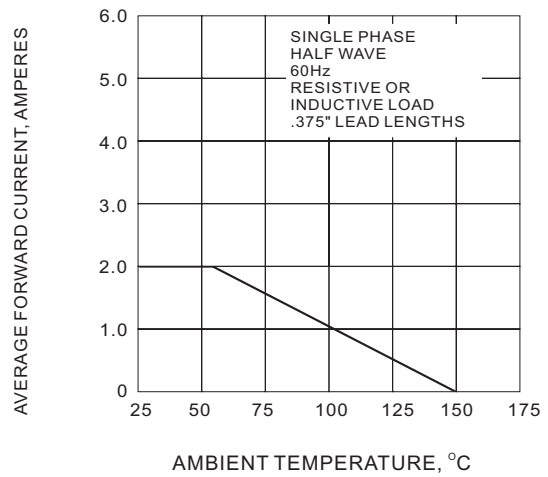

**Fig. 2 FORWARD CURRENT DERATING CURVE**

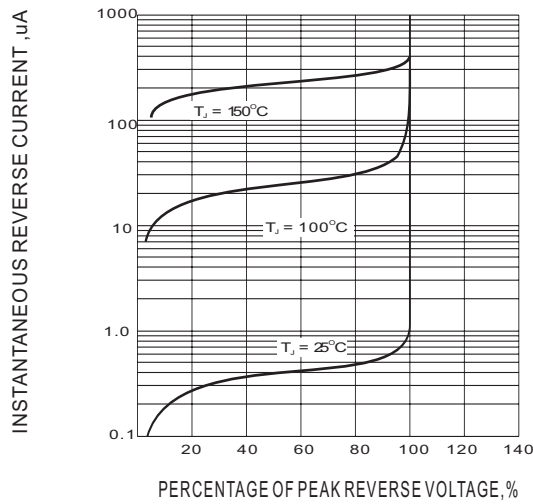

**Fig. 3 TYPICAL REVERSE CHARACTERISTIC**

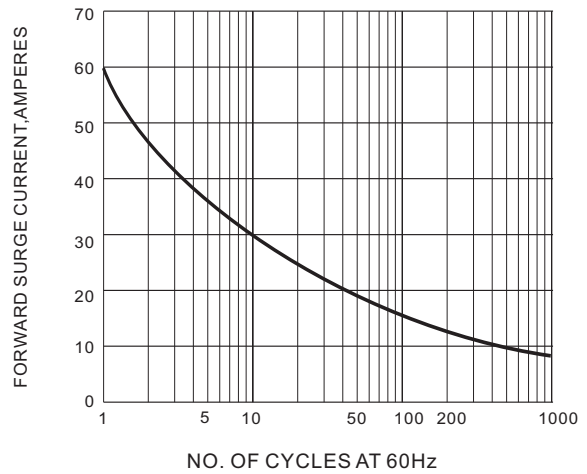

**Fig. 4 PEAK FORWARD SURGE CURRENT**