

# KSH772

**SemiHow**  
Know-How for Semiconductor

# KSH772

## Audio Frequency Power Amplifier


- Low Speed Switching
- Complement to KSH882

### Absolute Maximum Ratings TC=25°C unless otherwise noted

3 Amperes  
PNP Epitaxial Silicon Transistor  
1 Watts

CHARACTERISTICS	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-40	V
Collector-Emitter Voltage	$V_{CEO}$	-30	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current(DC)	$I_C$	-3	A
*Collector Current(Pulse)	$I_{CP}$	-7	A
Base Current(DC)	$I_B$	-0.6	A
Collector Dissipation(Tc=25°C)	$P_C$	10	W
Collector Dissipation(Tc=25°C)	$P_C$	1	W
Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{STG}$	-55~150	°C

TO-126  
1. Emitter  
2. Collector  
3. Base



\*Plus Widths≤10ms, Dutys≤50%

### Electrical Characteristics TC=25°C unless otherwise noted

CHARACTERISTICS	SYMBOL	Test Condition	Min	Typ.	Max	Unit
Collector Cut-off Current	$I_{CBO}$	$V_{CB} = -30V, I_E = 0$			-1	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB} = -3V, I_C = 0$			-1	$\mu A$
*DC Current Gain	$h_{FE1}$ $h_{FE2}$	$V_{CE} = -2V, I_C = -20mA$ $V_{CE} = -2V, I_C = -1A$	30 60	220 160	400	
*Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -2A, I_B = -0.2mA$		-0.3	-0.5	V
*Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = -2A, I_B = -0.2mA$		-1.0	-2.0	V
Current Gain Bandwidth Product	$f_T$	$V_{CE} = -5V, I_C = -0.1A$		80		MHz
Output Capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0$ $F = 1MHz$		55		pF

\* Pulse Test: Pulse Widths≤300μs, Duty Cycles≤2%

Note.

hFE2 Classification	R	60 ~ 120
	O	100 ~ 200
	Y	160 ~ 320
	G	250 ~ 500

Package Mark information.

S YWWH Y KSH772	S	SemiHow Logo
	YWW	Y; year code, WW; week code
	H	Assembly code
	Y	hFE2 Classification

### Typical Characteristics

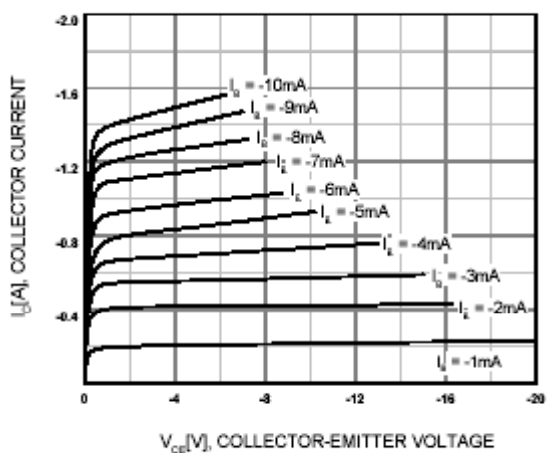


Figure 1. Static Characteristic

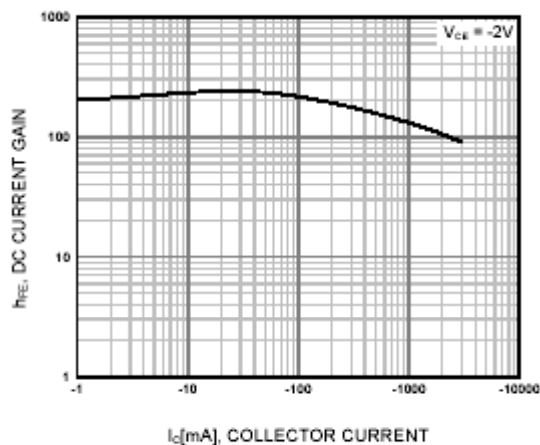


Figure 2. DC current Gain

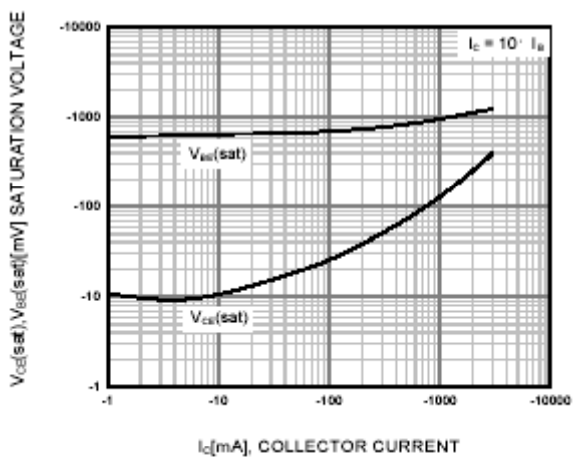


Figure 3. Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

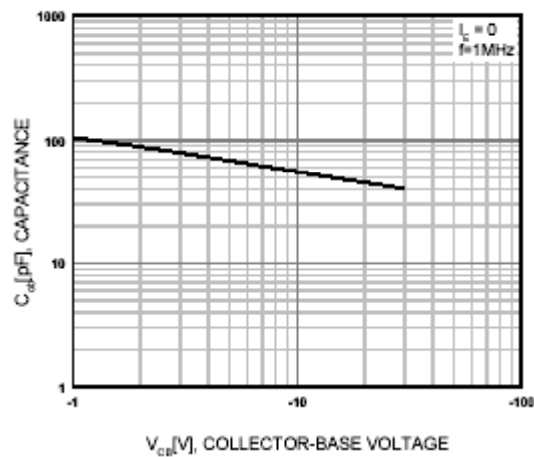


Figure 4. Collector Output Capacitance

Typical Characteristics (Continued)

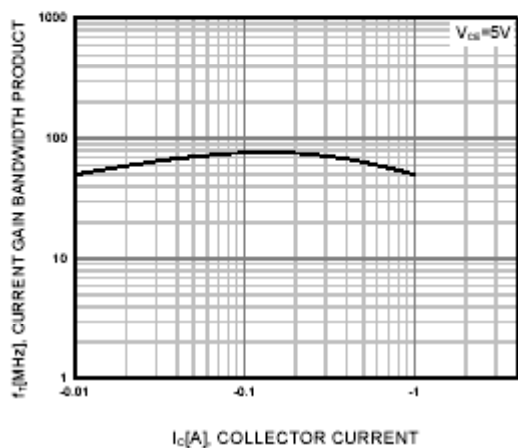


Figure 5. Current Gain Bandwidth Product

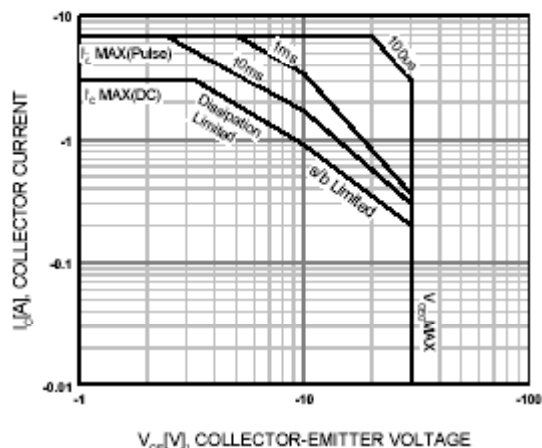


Figure 6. Safe Operating Area

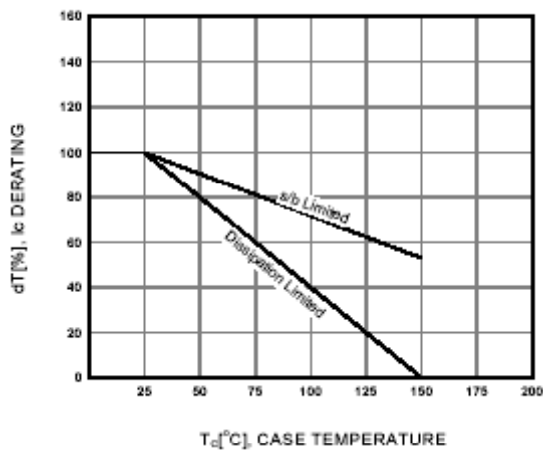


Figure 7. Derating Curve of Safe Operating Areas


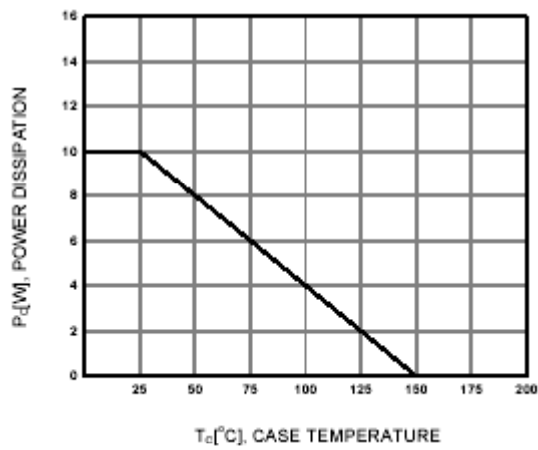


Figure 8. Power Derating

Package Dimension

TO-126

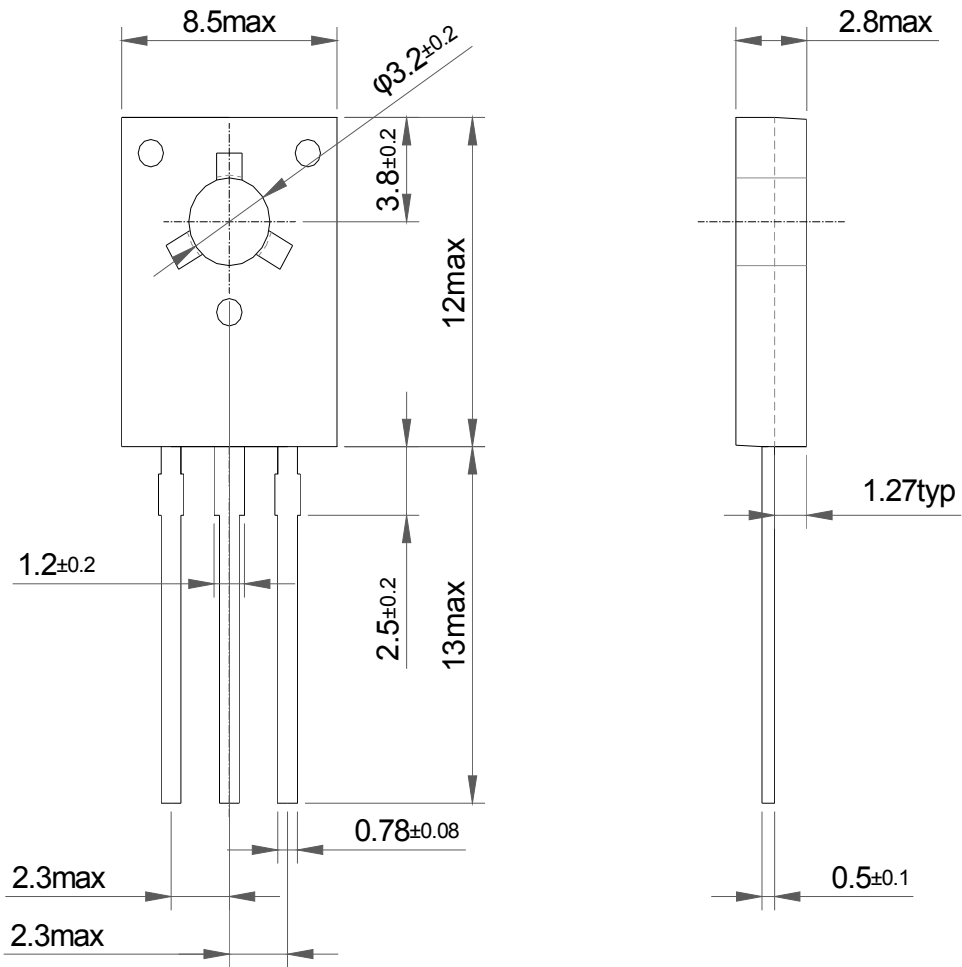

Dimensions in Millimeters