



Approved by:

Checked by:

Issued by:

SPECIFICATION

PRODUCT: SAW FILTER


MODEL: HB3614N (X6874D) SMD

HOPE MICROELECTRONICS CO.,LIMITED


1. Construction

1.1 Dimension and materials

Type : B3614N

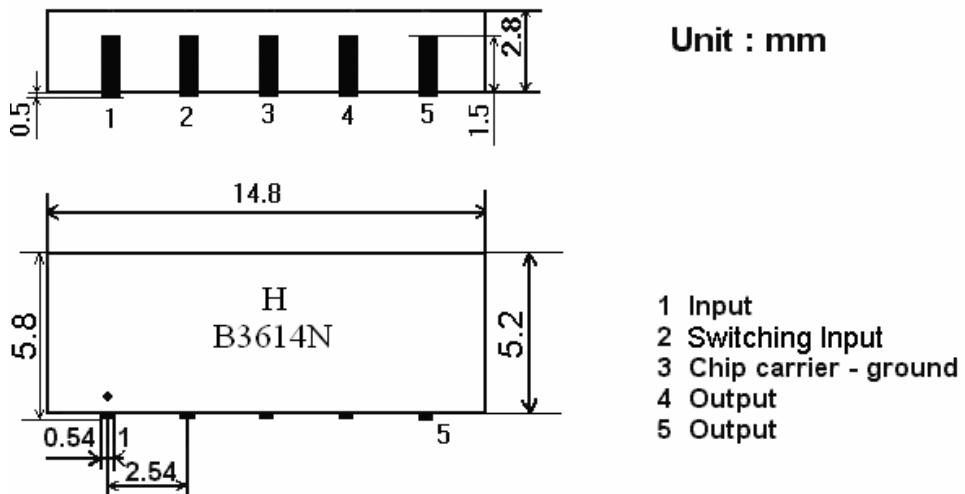

1.2. Circuit construction, measurement circuit

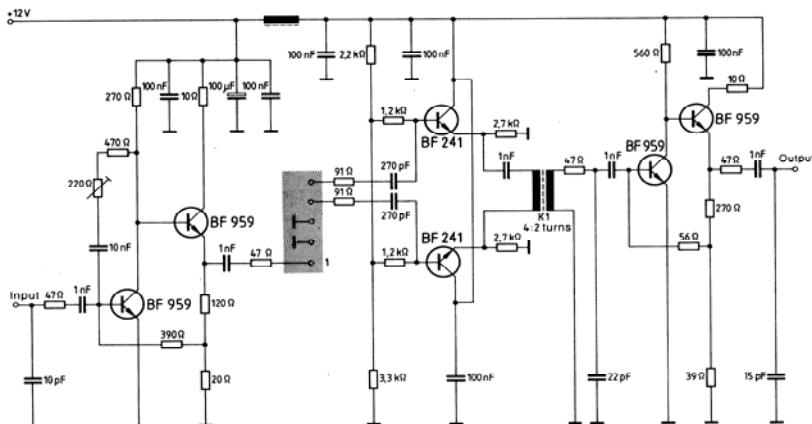

Test circuit for SIP-5 filter
Input impedance of the symmetrical post-amplifier: $2\text{ k}\Omega$ in parallel with 3 pF

2. Characteristics

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests is as follows;

Ambient temperature : 15°C to 35°C

Relative humidity : 25% to 85%

Air pressure : 86kPa to 106kPa

Operating temperature range

Operating temperature range is the range of ambient temperatures in which the filter can be operated continuously. -10°C ~ $+60^\circ\text{C}$

Storage temperature rang

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage.

Conditions are as specified elsewhere in these specifications. -40°C ~ +70°C

Reference temperature +25°C

2.1 Maximum Rating

DC voltage	VDC	12	V	Between any terminals
AC voltage	Vpp	10	V	Between any terminals

2.2 Electrical Characteristics

Source impedance $Z_s=50 \Omega$

Load impedance $Z_L=2k \Omega //3pF$ $T_A=25^\circ C$

Item	Freq	min	typ	max	
Center frequency	Fo	36.05	36.125	36.20	MHz
Insertion attenuation Reference level	36.13MHz	19.7	21.7	23.7	dB
Pass bandwidth	B_{1dB}	-	7.5	-	MHz
	B_{3dB}	-	8.0	-	MHz
	B_{30dB}	-	9.5	-	MHz
Relative attenuation	32.32MHz	-	1.2	-	dB
	39.93MHz	0.2	1.4	2.6	dB
	32.13MHz	1.7	3.2	4.7	dB
	40.13MHz	1.7	3.2	4.7	dB
	31.25MHz	32.0	45.0	-	dB
	47.25MHz	40.0	52.0	-	dB
Sidelobe	25.00~29.50MHz	35.0	42.0	-	dB
	29.50~31.25MHz	32.0	38.0	-	dB
	41.00~44.00MHz	31.0	37.0	-	dB
	44.00~50.00MHz	35.0	42.0	-	dB
Reflected wave signal suppression 1.2 us ... 6.0 us after main pulse (test pulse 250 ns , carrier frequency 36.125 MHz)		42.0	52.0		dB
Feedthrough signal suppression 1.3 us ... 1.2 us before main pulse (test pulse 250 ns , carrier frequency 36.125 MHz)		45.0	54.0		dB
Group delay ripple (p-p) 32.13 ~ 40.13 Mhz	-	50	-	ns	
Impedance at 36.125 Mhz Input: $Z_{in} = R_{in}/C_{in}$ Output: $Z_{in} = R_{in}/C_{in}$	-	-	-	-	$k \Omega // pF$ $k \Omega // pF$
Temperature coefficient of frequency		-72		ppm/k	


2.3 Environmental Performance Characteristics

Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70°C 1000H	< 1.0
Low temperature test -40°C 1000H	< 1.0
Humidity test 40°C 90-95% 1000H	< 1.0
Thermal shock -20°C==25°C==80°C 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Solder temp. 260°C for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More than 95% of total area of the pins should be covered with solder

2.4 Mechanical Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test On maple plate from 1 m high 3 times	<1.0
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weight 2 times	<1.0

2.5 Voltage Discharge Test

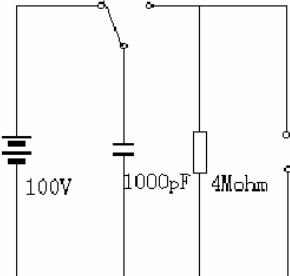Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode	 <p><1.0</p>

2.6 Frequency response:

►1:Transmission Log Mag 10.0 dB/
►2:Off

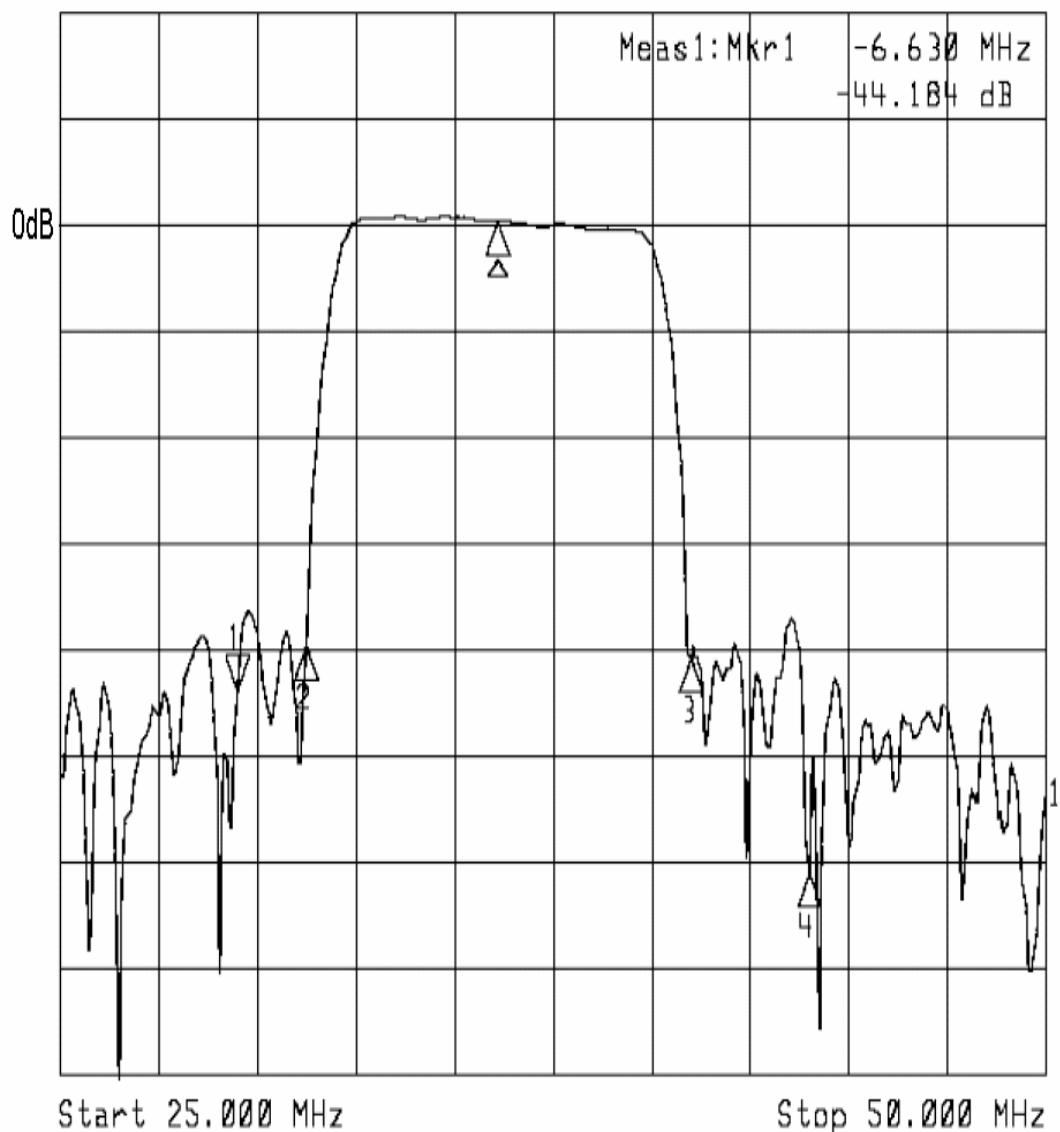

1: MkrΔ(MHz)	dB	2: Mkr (MHz)	dB
1: -6.63	-44.184		
2: -4.88	-39.939		
3: 4.87	-41.324		
4: 7.87	-61.503		

