


# PXO-P9-3PEM-6p


## LVPECL SMD Clock Oscillator Multiplier



### Features

- Applications: SONET / SDH / ATM, Gigabit Ethernet, switching system and telecom infrastructure
- Output frequency up to 700 MHz
- Low cost


Parameter	Specification	
Frequency range	100 ~ 700 MHz	
Standard frequencies	120.00, 122.88, 155.52, 307.2, 320, 491.52 & 622.08 MHz	
Supply voltage	+3.3 V $\pm$ 5 %	other supply voltage on request
Supply current	75 ~ 100 mA	
Frequency stability (*)	< $\pm$ 25 ppm < $\pm$ 50 ppm	over -20 ~ +70 °C over -40 ~ +85 °C
Output signal	LVPECL	
Output voltage	$V_{OH} \geq 2.275$ V	$V_{OL} \leq 1.680$ V
Output load	50 $\Omega$	@ Vdc -2.0 V
Jitter (rms) 1 $\sigma$	< 3 ps	@ 12 kHz ~ 20 MHz from carrier frequency
Symmetry	45 ~ 55 %	@ 1/2 Vdc
Rise / fall time	< 0.4 ns	20 % to 80 % of amplitude
Tri-state function	Pin #1 = high or open Pin #1 = low	Pin #4 & #5 → (E) signal Pin #4 & #5 → (D) high impedance
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C	standard application industrial application
Storage temperature range	-55 ~ +125 °C	
Packaging unit	tape & reel	500 or 1'000 pieces
(*) All inclusive: Stability vs. temperature, tolerance, aging, supply & load variation		
Customer specifications on request		

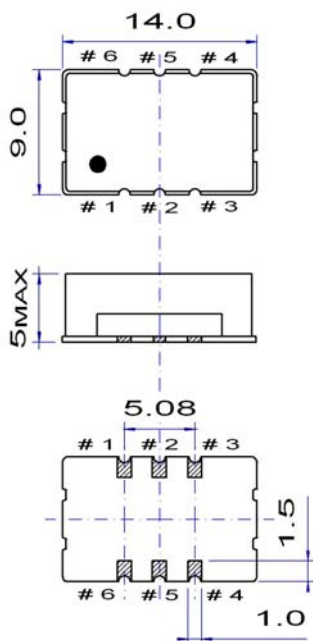

### Pin function


- # 1 E/D or not connected
- # 2 Not connected or E/D
- # 3 GND
- # 4 Output
- # 5 Complementary output
- # 6 Vdc

### Example for solder pattern



Do not design any conductive path between the pattern

### Example for IR reflow soldering temperature

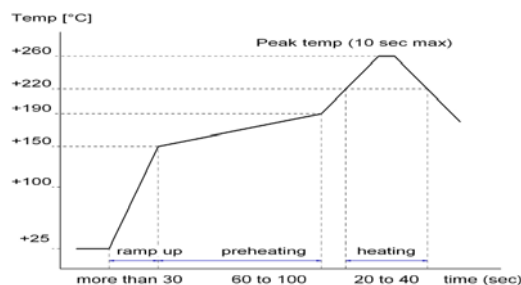

2002/95/EC RoHS compliant