



Features

- ✧ For IF SAW filter
- ✧ High attenuation
- ✧ Single-ended operation
- ✧ Dual In-line Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.95	70	70.05
Insertion Loss	dB	22	23	24
1 dB Bandwidth	MHz	4	4.27	-
3 dB Bandwidth	MHz	4.5	4.75	-
40 dB Bandwidth	MHz	-	6.68	7.25
Passband Variation	dB	-	0.4	0.8
Phase Linearity(f0±2MHz)	Deg	-	3	4
Group Delay Variation(f0±2MHz)	nsec	-	60	90
Absolute Delay	usec	-	3	-
Ultimate Rejection	dB	60	61	-
Material Temperature coefficient	KHz/°C	-1.26		
Substrate Material	-	112LT		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1		
Package Size	DIP2212 (22.2x12.8x4.7mm3)			

Notes:


- All specifications are based on the test circuit shown;
- In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
- This is the optimum impedance in order to achieve the performance show.



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBT7030		
Rev. Date	2010-09-21		
Ver.	1.2	Page	1/3


Matching Configuration

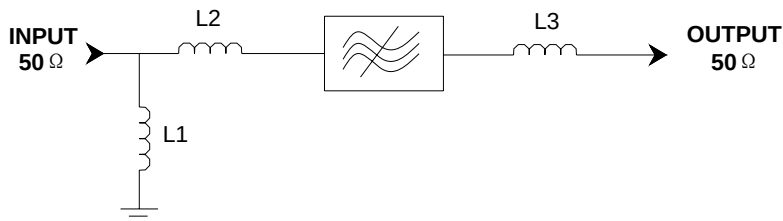

L1=68nH L2=L3=82nH
Source/Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

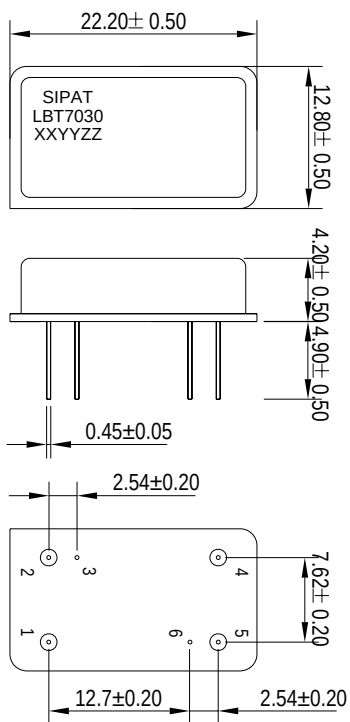

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBT7030: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP2212

Unit: mm



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBT7030

Rev. Date

2010-09-21

Ver.


1.2

Page 2/3



Typical Performance


Frequency Respond

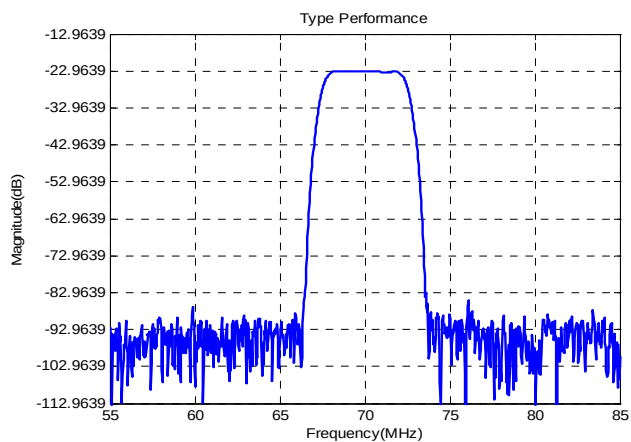

Horizontal: 5MHz/Div

Vertical: 10dB/Div


Passband Respond

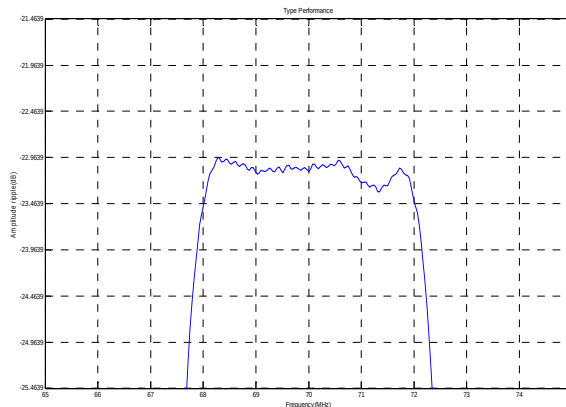

Horizontal: 1MHz/Div

Vertical: 0.5dB/Div


Group Delay Variation($f_0 \pm 2\text{MHz}$)

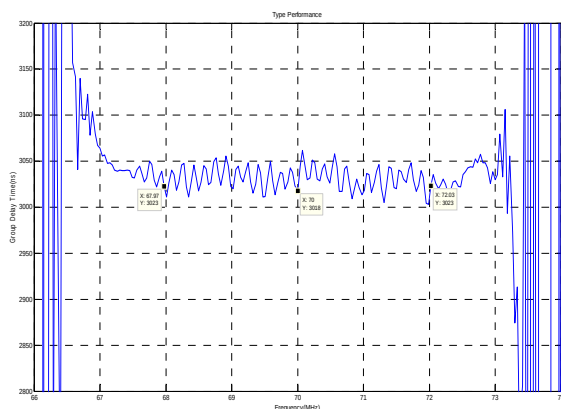

Horizontal: 1MHz/Div

Vertical: 50ns/Div


Phase Linearity($f_0 \pm 2\text{MHz}$)

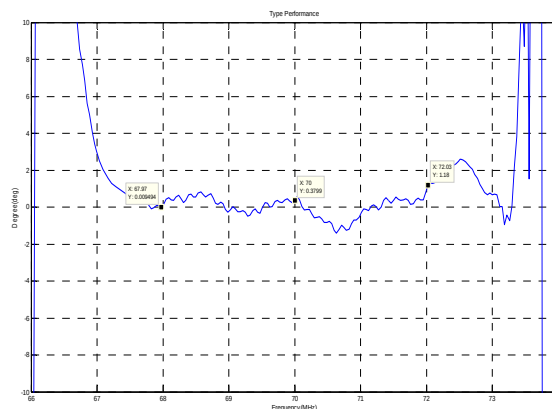


Horizontal: 1MHz/Div

Vertical: 2deg/Div

Smith Chart S11

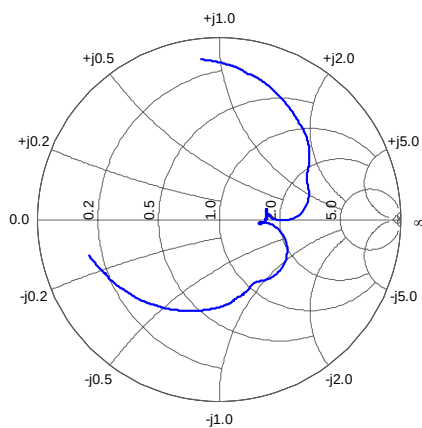

Smith Chart S22

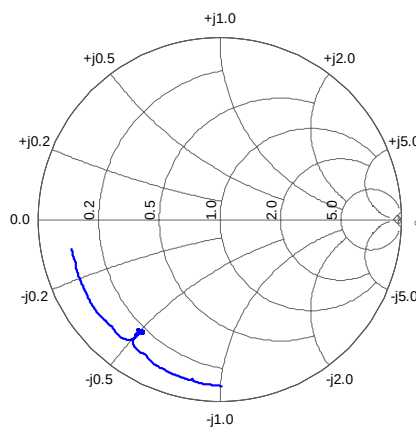

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBT7030

Rev. Date

2010-09-21

Ver.

1.2

Page 3/3