

Photocoupler

KODENSHI

K201 • K202 • K204

These Photocouplers consist of two Gallium Arsenide Infrared Emitting Diodes connected in a reverse-parallel configuration for AC-input and a Silicon NPN Phototransistor per a channel.

The K201 has one channel in a 4-pin mini-flat SMD package.

The K202 has two channels in a 8-pin mini-flat SMD package.

The K204 has four channels in a 16-pin mini-flat SMD package.

FEATURES


- Mini-flat Package
- Collector-Emitter Voltage : Min.50V
- Current Transfer Ratio : 50% Min.
(at $I_F = \pm 5\text{mA}$, $V_F=5\text{V}$)
- Electrical Isolation Voltage : AC3750Vrms

APPLICATIONS

- AC Signal Input
- Interface between two circuits of difference Potential
- Cordless Phone
- Programmable Logic Control

DIMENSION

(Unit : mm)

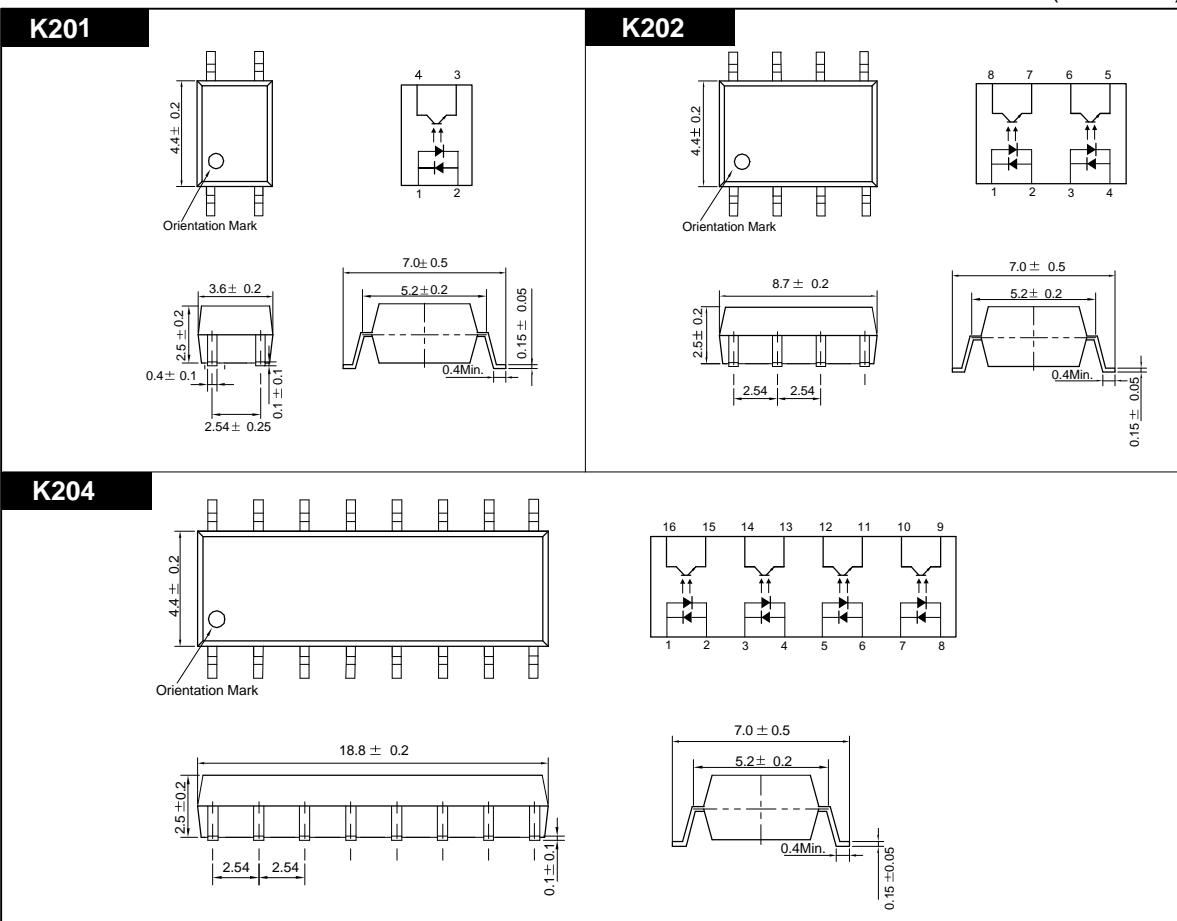

Photocoupler



K201 • K202 • K204

MAXIMUM RATINGS

(Ta=25 °C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I _F	± 50	mA
	Peak Forward Current ^{*1}	I _{FP}	± 1	A
	Power Dissipation	P _D	70	mW
Output	Collector-Emitter Breakdown Voltage	BV _{CEO}	50	V
	Emitter-Collector Breakdown Voltage	BV _{ECO}	6	V
	Collector Current	I _C	50	mA
	Collector Power Dissipation	P _C	150	mW
Input to Output Isolation Voltage ^{*2}		V _{iso}	AC3750	V _{rms}
Storage Temperature		T _{stg}	-55~+125	
Operating Temperature		T _{opr}	-30~+100	
Lead Soldering Temperature ^{*3}		T _{sol}	260	
Total Power Dissipation		P _{tot}	200	mW

*1. Input current with 100μs pulse width, 1% duty cycle

*2. Measured at RH=40~60% for 1min

*3. 1/16 inch form case for 10sec

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C, unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V _F	I _F = ± 10mA	-	1.15	1.30	V
	Capacitance	C _T	V=0, f=1kHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =0.5mA	50	-	-	V
	Emitter-Collector Breakdown Voltage	BV _{ECO}	I _E =0.1mA	6	-	-	V
	Collector Dark Current	I _{CEO}	I _F =0, V _{CE} =24V	-	-	100	nA
	Capacitance	C _{CE}	V _{CE} =0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio ^{*4}	CTR	I _F = ± 5mA, V _{CE} =5V	50	-	600	%
	Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _F = ± 5mA, I _C =1mA	-	0.15	0.4	V
	Input-Output Capacitance	C _{IO}	V=0, f=1KHz	-	1	-	pF
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-	
	Rise Time	tr	V _{CE} =5V, R _L =100 I _C =2mA	-	4	-	μs
	Fall Time	tf		-	4	-	μs
Symmetry Ratio		CTR1/CTR2		1	-	3	

*4. CTR=(I_C/I_F) X 100 (%)

K201 • K202 • K204

