

APPLICATION NOTE

Tape and Reel Information – RF Modules

Production quantities of Skyworks RF Modules are shipped in standard tape and reel format. The enclosed information provides the formats and dimensions for the popular sizes of current modules.

Revision History

Revision	Level	Date	Description
A		April 24, 2002	Add: 4 x 4mm and 8 x 10 mm Tape and Reel Drawings
B		May 10, 2002	Add: ESD information
C		July 12, 2002	Add: Table 2
D		August 12, 2004	Revise: Section 1.0; Figures 3, 5, 9, 11, 13, 15 Add: Section 2.0; Figures 1, 2, 4, 6, 7, 8, 10, 12, 14, 16, 17
E		October 6, 2004	Delete: Shipping Tray information (Refer to Application Note: Shipping Tray Information - RF Modules_200079A) Add: Figure 7 (9 x 10 mm Body Size)

References

3M™ is a trademark of the 3M Company

EPAK® is a registered trademark of ePAK International, Inc.

Kostat® is registered trademark of Kostat, Inc.

Copyright © 2002–2004, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products. These materials are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials. Skyworks may make changes to its documentation, products, specifications and product descriptions at any time, without notice. Skyworks makes no commitment to update the information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from future changes to its documentation, products, specifications and product descriptions.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by or under this document. Except as may be provided in Skyworks' Terms and Conditions of Sale for such products, Skyworks assumes no liability whatsoever in association with its documentation, products, specifications and product descriptions.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED OR OTHERWISE, RELATING TO SALE AND/OR USE OF SKYWORKS PRODUCTS INCLUDING WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. SKYWORKS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THESE MATERIALS WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications. Skyworks' customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

The following are trademarks of Skyworks Solutions, Inc.: Skyworks™, the Skyworks logo, and Breakthrough Simplicity™. Product names or services listed in this publication are for identification purposes only, and may be trademarks of Skyworks or other third parties. Third party brands and names are the property of their respective owners. Additional information, posted at www.skyworksinc.com, is incorporated by reference.

Table of Contents

Revision History ii

References ii

1.0 Carrier Tapes 2

 2.1 Carrier Tapes – Black Conductive Polycarbonate 2

 2.2 Carrier Tapes – Black Conductive Polystyrene..... 2

2.0 Electrostatic Discharge (ESD) Sensitivity..... 2

List of Figures

Figure 1. Carrier Tape Overmold MCM/RFLGA – 3.0 x 3.0 mm Body Size 3

Figure 2. Carrier Tape Overmold MCM / RFLGA / QFN – 4.0 x 4.0 mm Body Size 4

Figure 3. Carrier Tape Overmold MCM / RFLGA – 6.0 x 6.0 mm Body Size 5

Figure 4. Carrier Tape Overmold MCM – 6.0 x 8.0 mm Body Size 6

Figure 5. Carrier Tape Ceramic MCM – 8.3 x 8.3 mm Body Size 7

Figure 6. Carrier Tape Overmold MCM – 8.0 x 10.0 mm Body Size 8

Figure 7. Carrier Tape Overmold MCM – 9.0 x 10.0 mm Body Size 9

Figure 8. Carrier Tape Overmold MCM – 9.1 x 11.6 mm Body Size 10

Figure 9. Carrier Tape Overmold MCM – 10.0 x 14.0 mm Body Size 11

Figure 10. Tape-to-Reel Orientation, Unreeling Direction..... 12

List of Tables

Table 1. Classes of ESD Sensitive Parts 2

Table 2. Static Shielding Foil Moisture Vapor Barrier Bag 2

1.0 Carrier Tapes

Production quantities of Skyworks RF products can be delivered in standard tape-and-reel format for attachment in a production solder-reflow environment. The carrier tapes identified in this Application Note may be manufactured of either polycarbonate or polystyrene material. The material used for each individual carrier tape is identified on the tape and reel drawing under NOTES.

The diagrams within in this Application Note provide information on materials, dimensions, adherence to industry standards, and part numbers for placing orders. Carrier tape diagrams are arranged by size. For example, the sequence of part sizes in Figures 1 through 9 begin with the 3 x 3, followed by the 4 x 4, the 6 x 6, and so on through Figure 9 with the 10 x 14. Figure 10 illustrates the orientation of the carrier tape to the supply reel and the direction of the tape as it unreels. Any diagram within this document may be quickly located from the List of Figures on page 1.

2.1 Carrier Tapes – Black Conductive Polycarbonate

Black conductive polycarbonate carrier tapes possess electrical and triboelectrical properties that help protect static-sensitive components with an effective balance of the carrier’s electrostatic shielding and electrostatic decay properties. The electrically conductive polycarbonate carrier shows a nominal surface resistivity in the pocket of $\geq 10^4 \Omega/\text{square}$ and $\leq 10^8 \Omega/\text{square}$, which minimizes dV/dt to afford ESD protection to devices in Classes I through III. These properties make the black polycarbonate carrier appropriate for packaging electrostatically sensitive components.

2.2 Carrier Tapes – Black Conductive Polystyrene

Black conductive polystyrene carrier tapes possess electrical and triboelectrical properties that help protect static-sensitive components with an effective balance of the carrier’s electrostatic shielding and electrostatic decay properties. The electrically static dissipative polystyrene carrier shows a nominal surface resistivity of $10^{10} \Omega/\text{square}$, which minimizes dV/dt to afford ESD protection to devices in Classes I through III. These properties make the black polystyrene carrier appropriate for packaging electrostatically sensitive components.


2.0 Electrostatic Discharge (ESD) Sensitivity

Table 1. Classes of ESD Sensitive Parts

ESD Model	ESD Class	Voltage Range
HBM	I	> 0 V–1,999 V
	II	2,000 V–3,999 V
	III	4000 V–15,999 V

Table 2. Static Shielding Foil Moisture Vapor Barrier Bag

Electrical Properties	Method	Units	Typical Value
Surface Resistance	EOS/ESD S11.11	ohms	In 1.0E+11
			Out 1.0E+11
Static Decay	FTMS 101C/METHOD 4046	Sec.	+ 0.01 – 0.01
Energy Test	EOS/ESD S11.31	nano-Joules	10

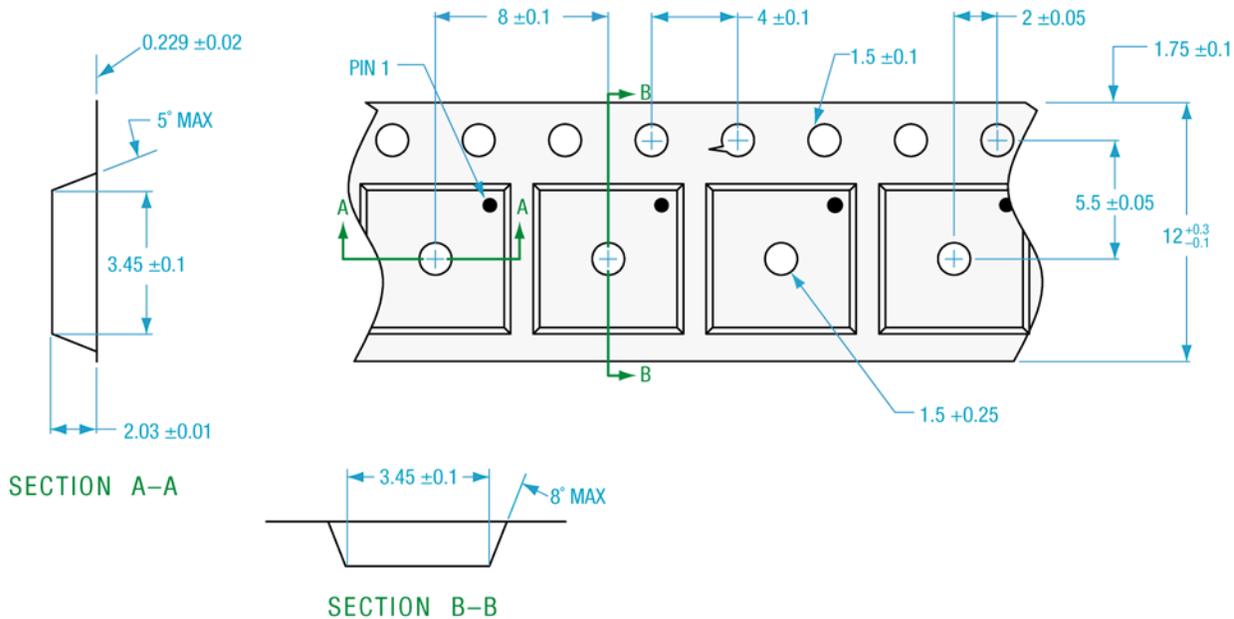

NOTES:

1. CARRIER TAPES MUST MEET ALL REQUIREMENTS OF SKYWORKS GP01–D232 PROCUREMENT SPEC FOR TAPE AND REEL SHIPPING.
- ② CARRIER TAPE SHALL BE BLACK CONDUCTIVE POLYCARBONATE OR POLYSTYRENE.
3. COVER TAPE SHALL BE TRANSPARENT CONDUCTIVE PRESSURE-SENSITIVE ADHESIVE (PSA) MATERIAL W/ 9.3 mm WIDTH.
4. ESD-SURFACE RESISTIVITY SHALL BE $\leq 1 \times 10^8$ OHMS/SQUARE PER EIA, JEDEC TNR SPECIFICATION.
5. ALL DIMENSIONS ARE IN MILLIMETERS.
6. TOLERANCES: .XX = ± 0.10
7. PART NO.: 3M051141 (PLEASE INDICATE ON PURCHASE ORDER).
8. NUMBER OF PARTS per 13 inch (DIAMETER) x 12 mm REEL: 2500.

3M CARRIER TAPE

3x3
101568_001

Figure 1. Carrier Tape Overmold MCM/RFLGA – 3.0 x 3.0 mm Body Size

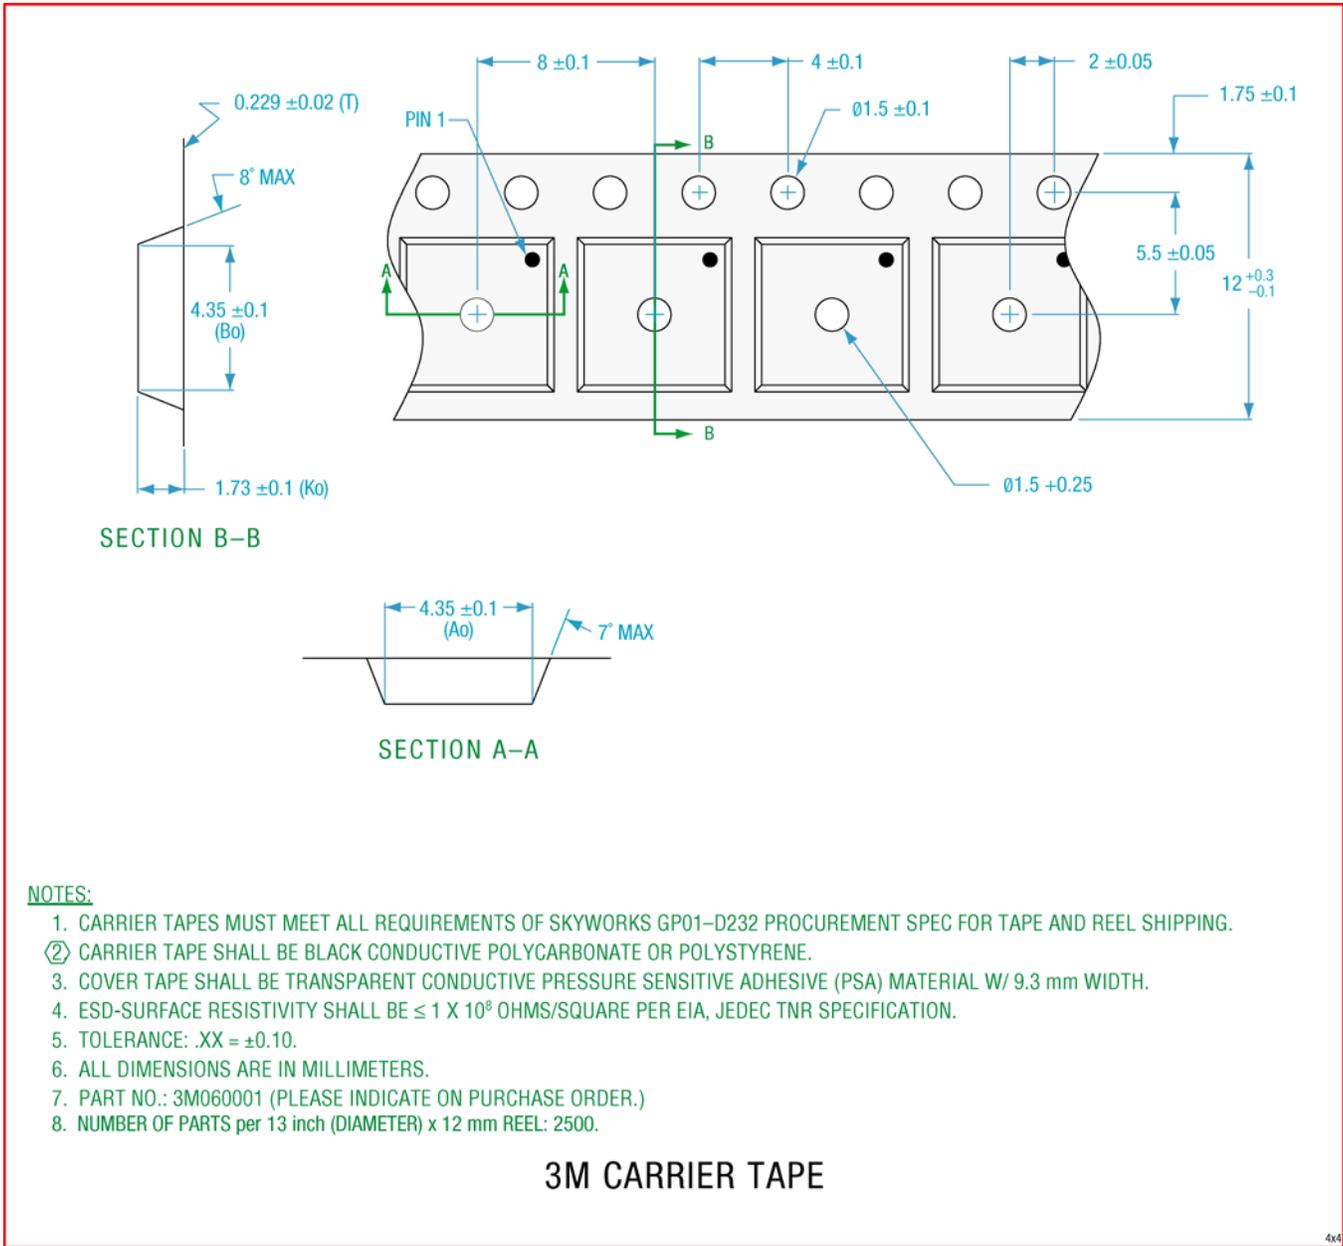


Figure 2. Carrier Tape Overmold MCM / RFLGA / QFN – 4.0 x 4.0 mm Body Size


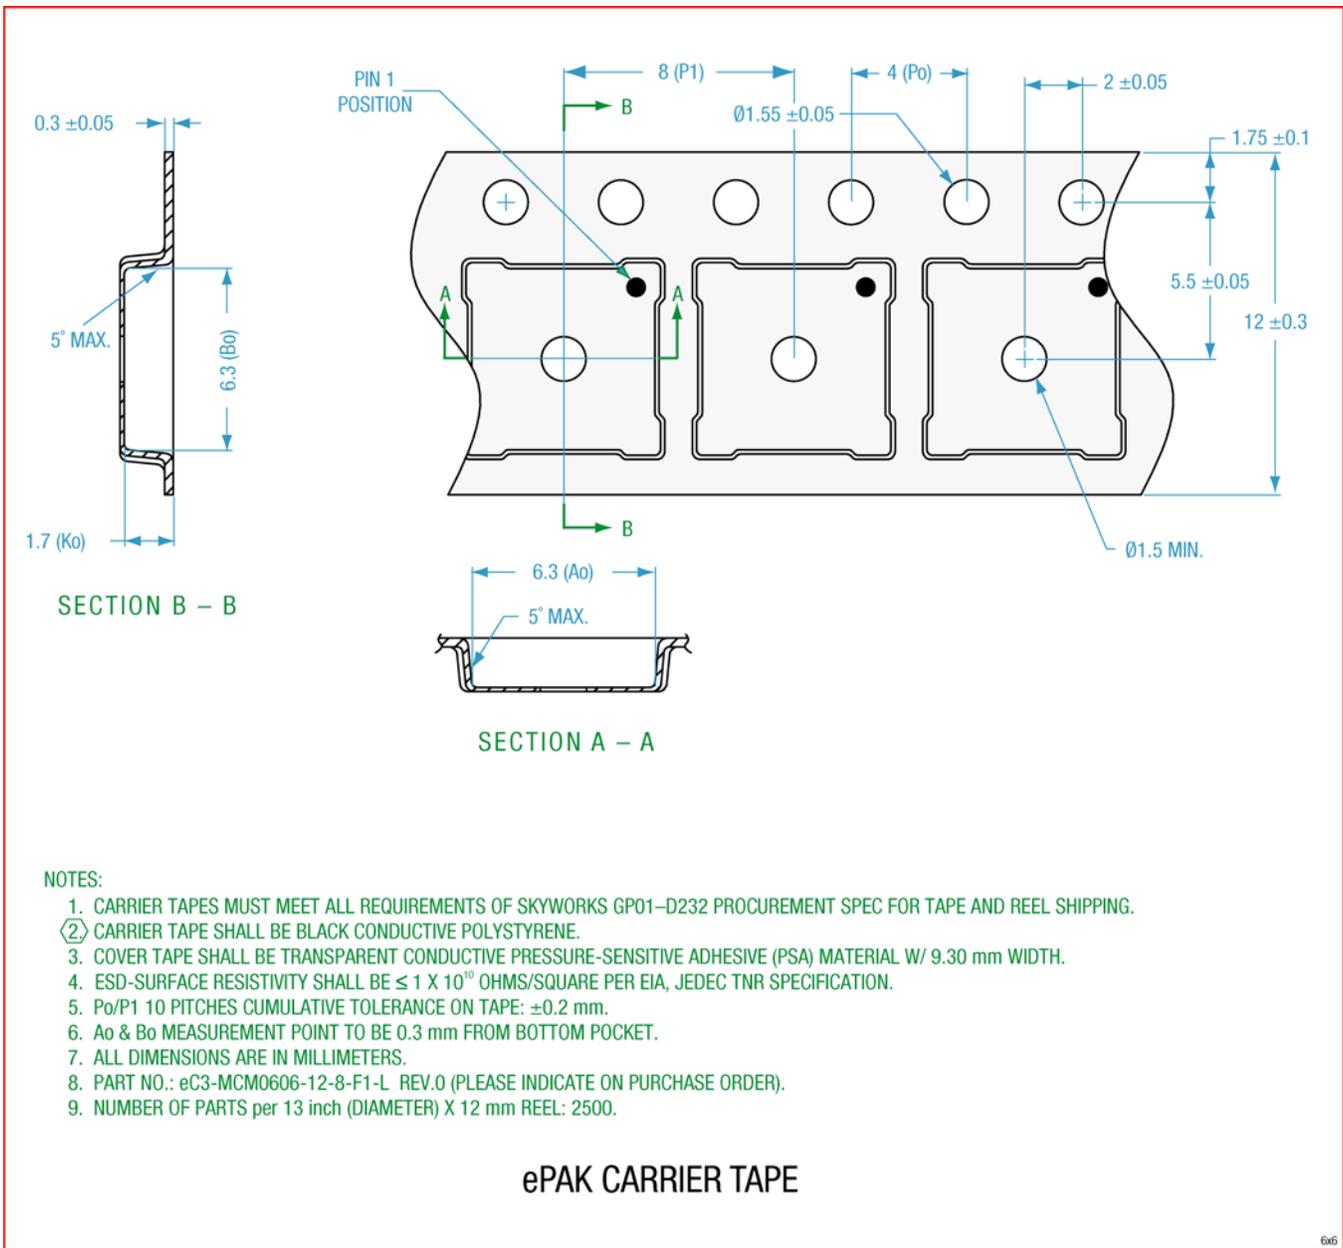


Figure 3. Carrier Tape Overmold MCM / RFLGA – 6.0 x 6.0 mm Body Size

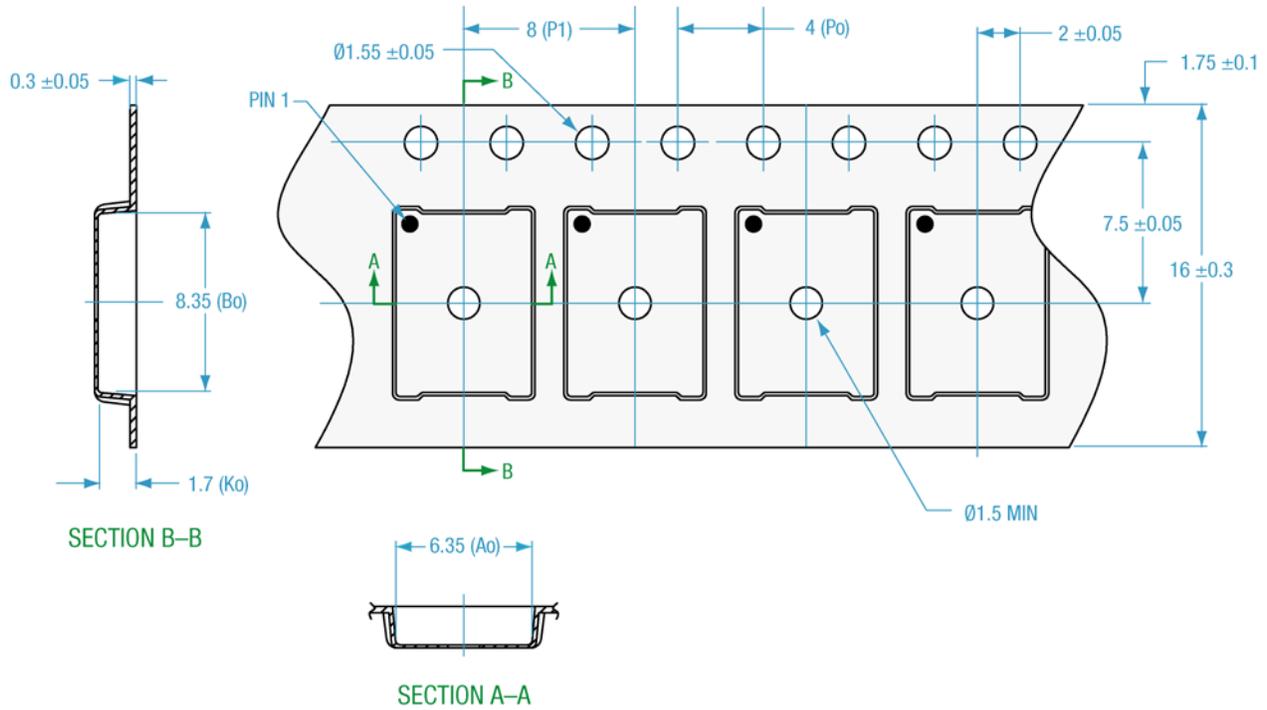


NOTES:

1. CARRIER TAPES MUST MEET ALL REQUIREMENTS OF SKYWORKS GP01–D232 PROCUREMENT SPEC FOR TAPE AND REEL SHIPPING.
- ② CARRIER TAPE SHALL BE BLACK CONDUCTIVE POLYSTYRENE.
3. COVER TAPE SHALL BE TRANSPARENT CONDUCTIVE PRESSURE SENSITIVE ADHESIVE (PSA) MATERIAL W/13.3 mm WIDTH.
4. ESD-SURFACE RESISTIVITY SHALL BE $\leq 1 \times 10^{10}$ OHMS/SQUARE PER EIA, JEDEC TNR SPECIFICATION.
5. Po/P1, 10 PITCHES CUMULATIVE TOLERANCE ON TAPE: ± 0.2 mm.
6. Ao AND Bo MEASUREMENT POINT TO BE 0.3 mm FROM BOTTOM POCKET.
7. ALL DIMENSIONS ARE IN MILLIMETERS.
8. PART NO.: eC3-MCM0608-16-8-F1-L REV. 0. PLEASE INDICATE ON PURCHASE ORDER.
9. NUMBER OF PARTS per 13 inch (DIAMETER) x 16 mm wide REEL: 2500.

ePAK CARRIER TAPE

608
101568_004

Figure 4. Carrier Tape Overmold MCM – 6.0 x 8.0 mm Body Size

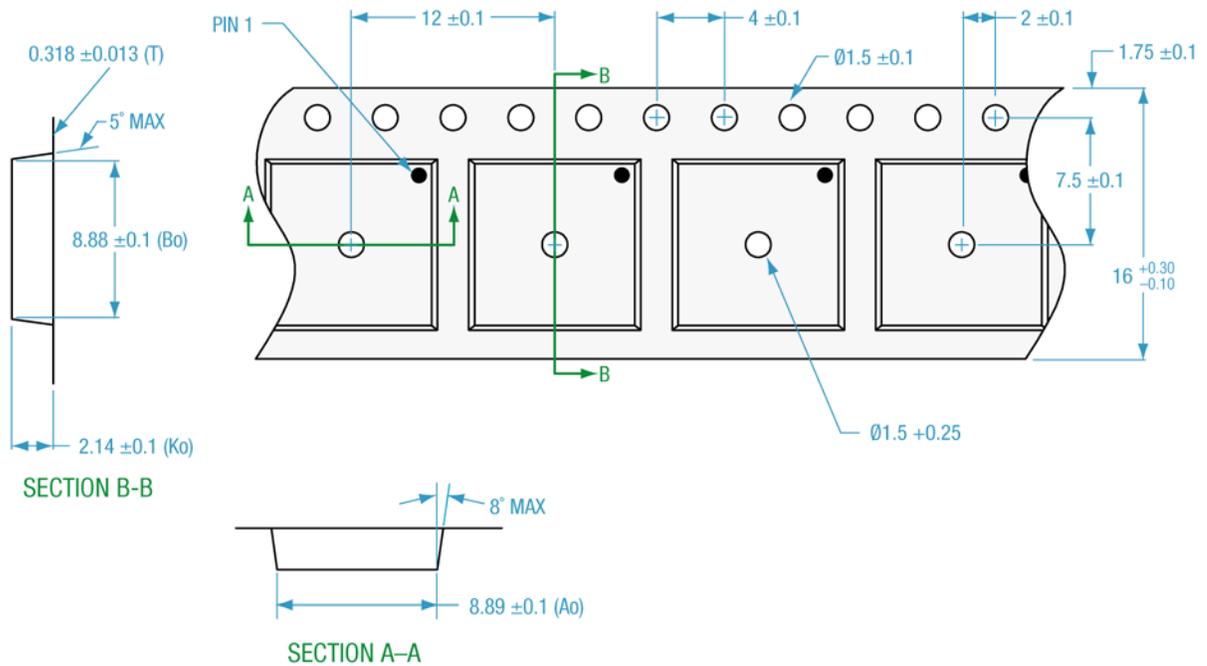


NOTES:

1. CARRIER TAPES MUST MEET ALL REQUIREMENTS OF SKYWORKS GP01–D232 PROCUREMENT SPEC FOR TAPE AND REEL SHIPPING.
- ② CARRIER TAPE SHALL BE BLACK CONDUCTIVE POLYCARBONATE OR POLYSTYRENE.
3. COVER TAPE SHALL BE TRANSPARENT CONDUCTIVE PRESSURE-SENSITIVE ADHESIVE (PSA) MATERIAL W/ 13.3 mm WIDTH.
4. ESD-SURFACE RESISTIVITY SHALL BE $\leq 1 \times 10^8$ OHMS/SQUARE PER EIA, JEDEC TNR SPECIFICATION.
5. TOLERANCES: .XX = ± 0.1
6. ALL DIMENSIONS ARE IN MILLIMETERS.
7. PART NO.: US039321 (PLEASE INDICATE ON PURCHASE ORDER).
8. NUMBER OF PARTS per 13 inch (DIAMETER) x 16 mm REEL: 2000.

3M CARRIER TAPE


8.3x8.3
101568_005

Figure 5. Carrier Tape Ceramic MCM – 8.3 x 8.3 mm Body Size

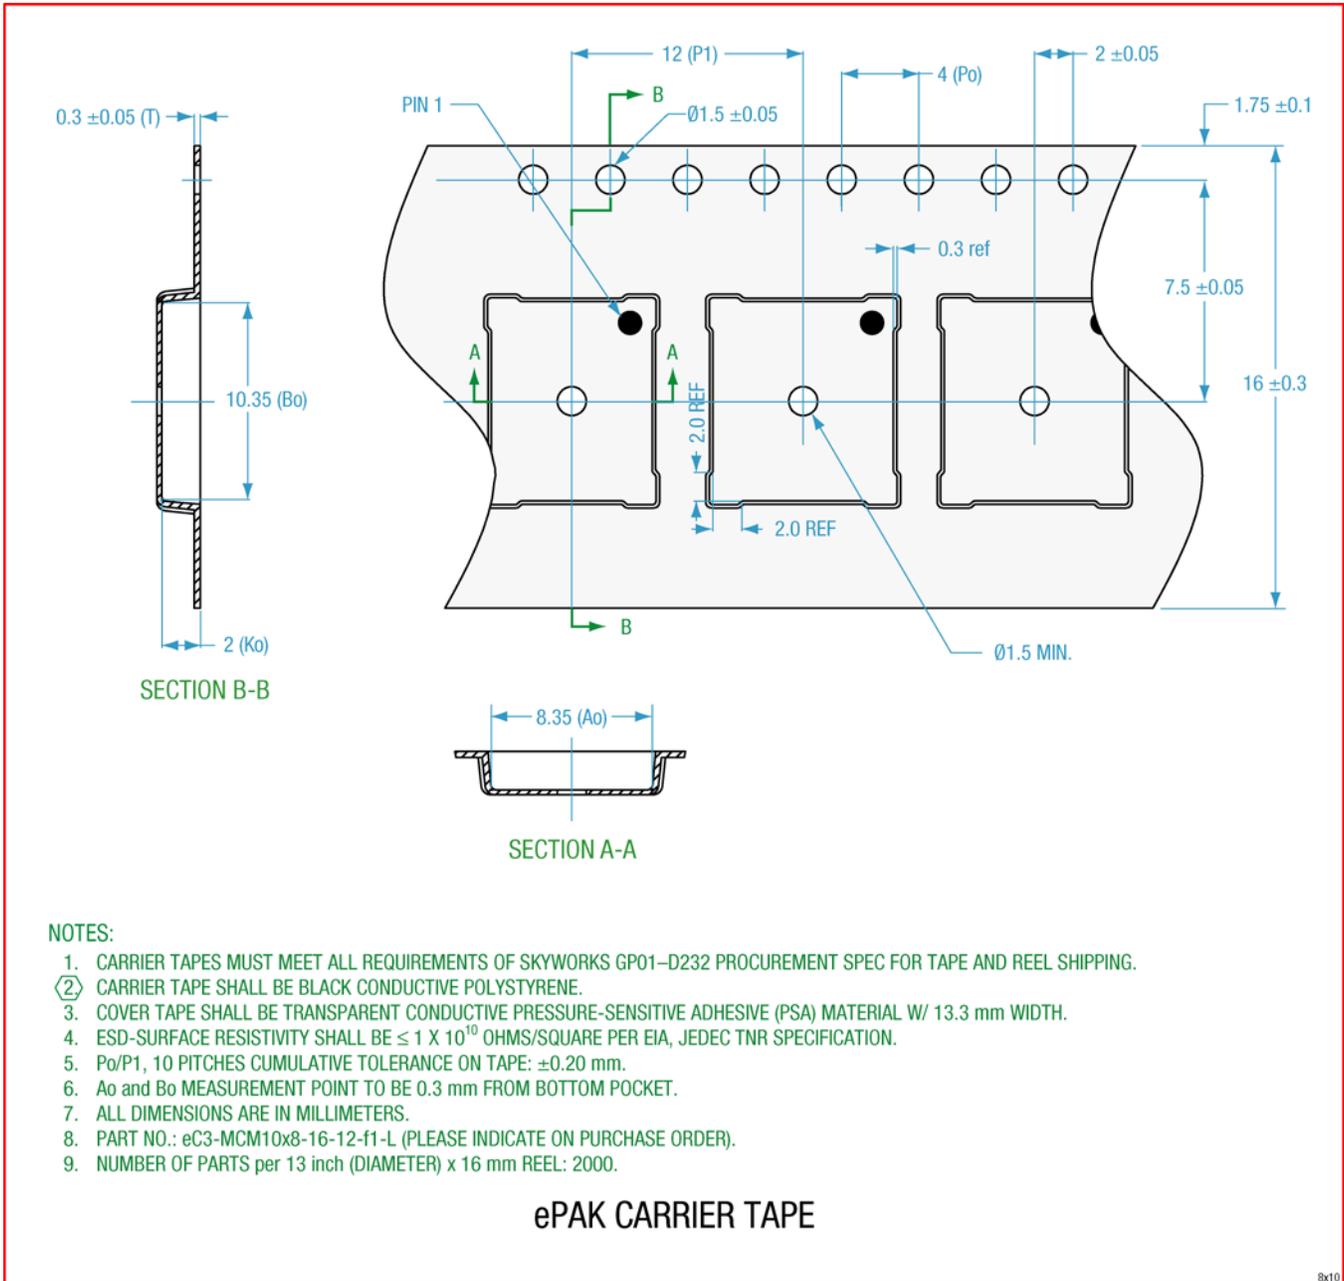

8x10
101568_006

Figure 6. Carrier Tape Overmold MCM – 8.0 x 10.0 mm Body Size

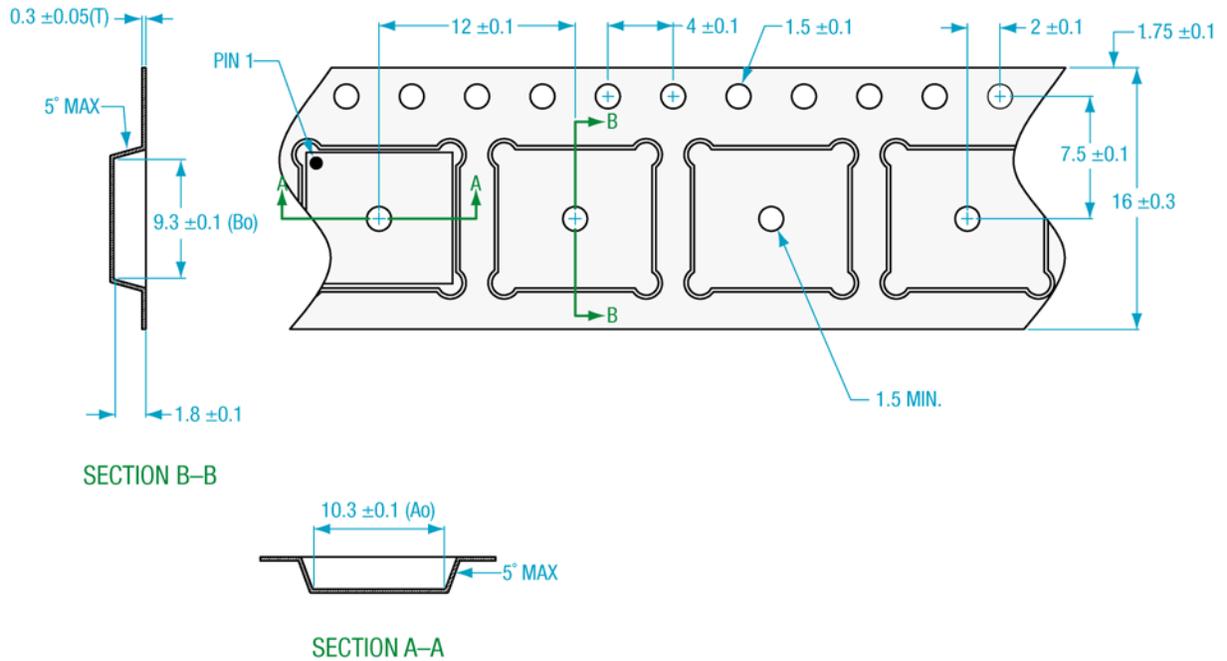


NOTES:

1. CARRIER TAPES MUST MEET ALL REQUIREMENTS OF SKYWORKS GP01-D232 PROCUREMENT SPEC FOR TAPE AND REEL SHIPPING.
- ② CARRIER TAPE SHALL BE BLACK CONDUCTIVE POLYSTYRENE.
3. COVER TAPE SHALL BE TRANSPARENT CONDUCTIVE PRESSURE-SENSITIVE ADHESIVE (PSA) MATERIAL W/ 13.3 mm WIDTH.
4. ESD-SURFACE RESISTIVITY SHALL BE $\leq 1 \times 10^{10}$ OHMS/SQUARE PER EIA, JEDEC TNR SPECIFICATION.
5. ALL DIMENSIONS ARE IN MILLIMETERS.
6. TOLERANCES: .XX = ± 0.10
7. PART NO.: KS1612-181 (PLEASE INDICATE ON PURCHASE ORDER).
8. NUMBER OF PARTS per 13 inch (DIAMETER) x 16 mm REEL: 2000.

KOSTAT CARRIER TAPE


9X10
101568_007

Figure 7. Carrier Tape Overmold MCM – 9.0 x 10.0 mm Body Size

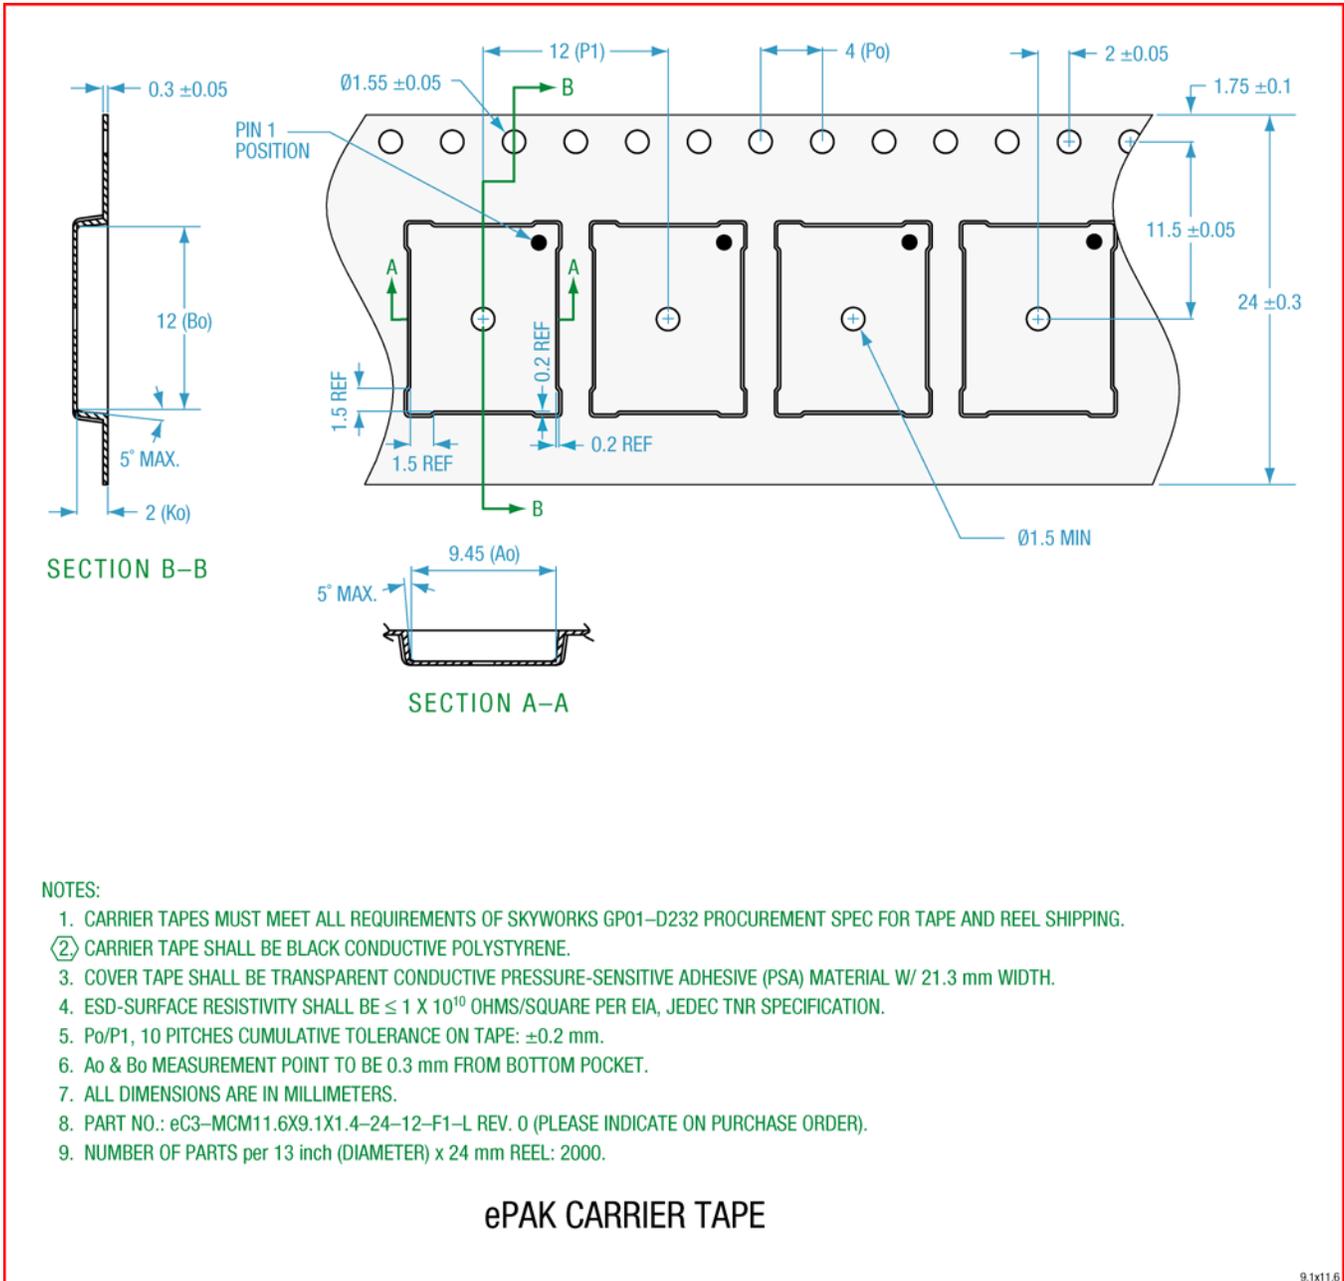


9.1x11.6
101568_008

Figure 8. Carrier Tape Overmold MCM – 9.1 x 11.6 mm Body Size

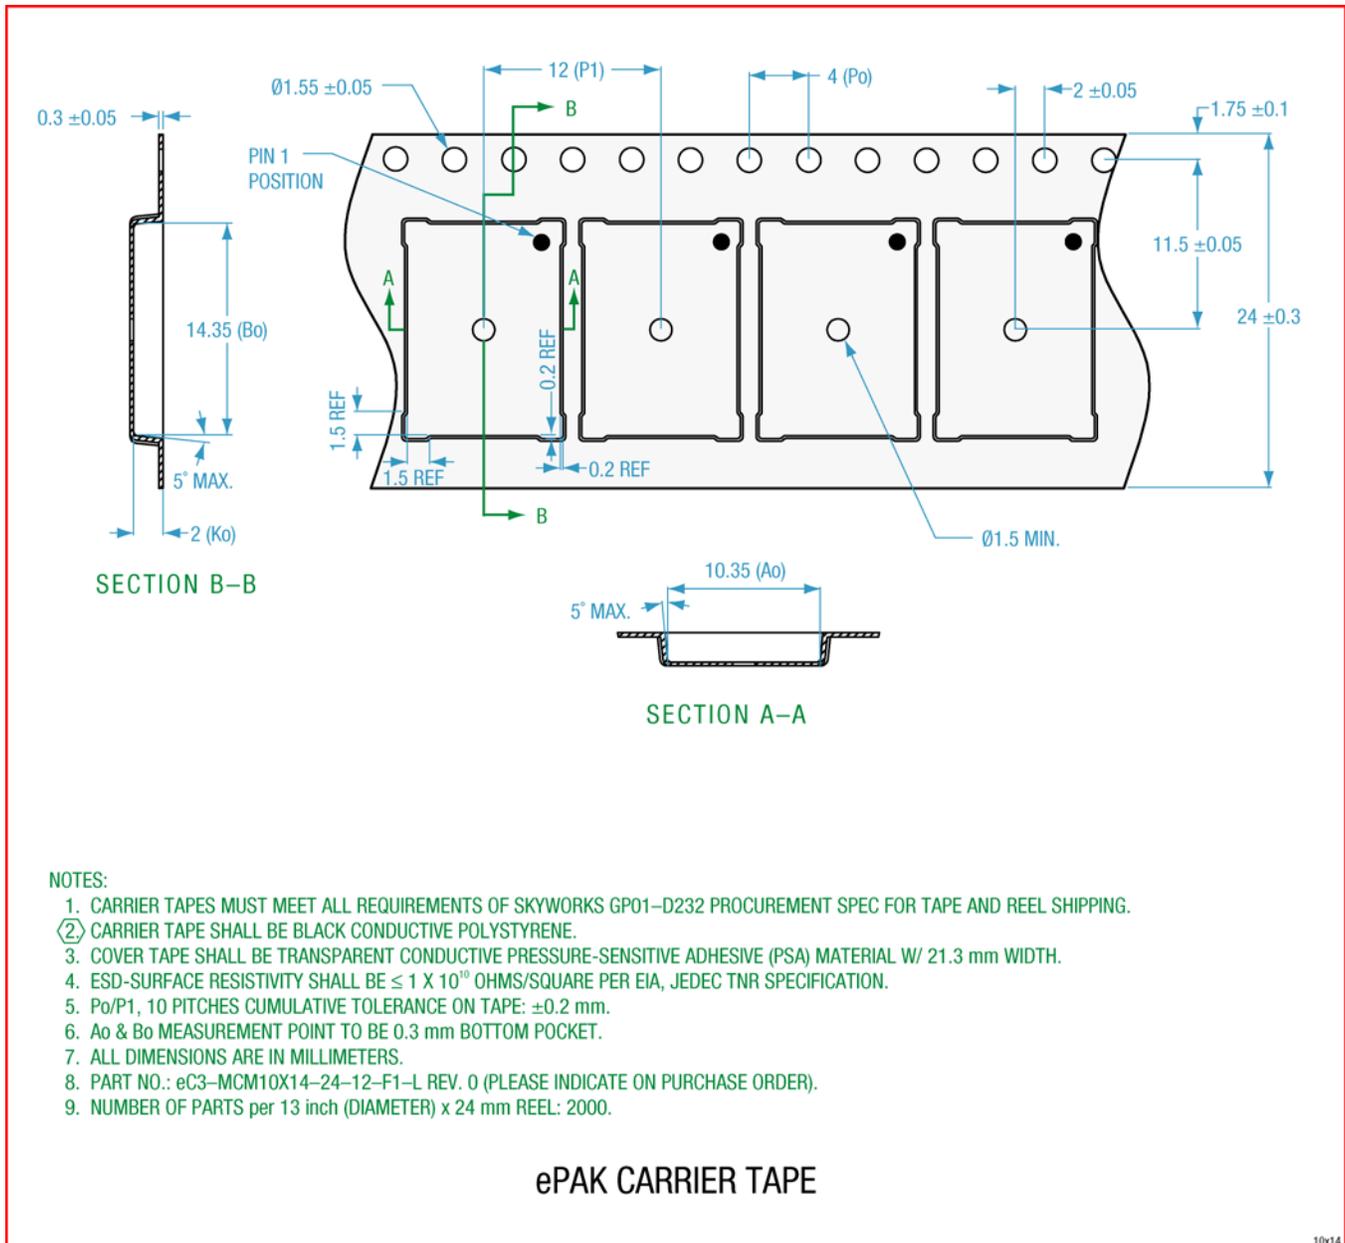

10x14
101568_009

Figure 9. Carrier Tape Overmold MCM – 10.0 x 14.0 mm Body Size

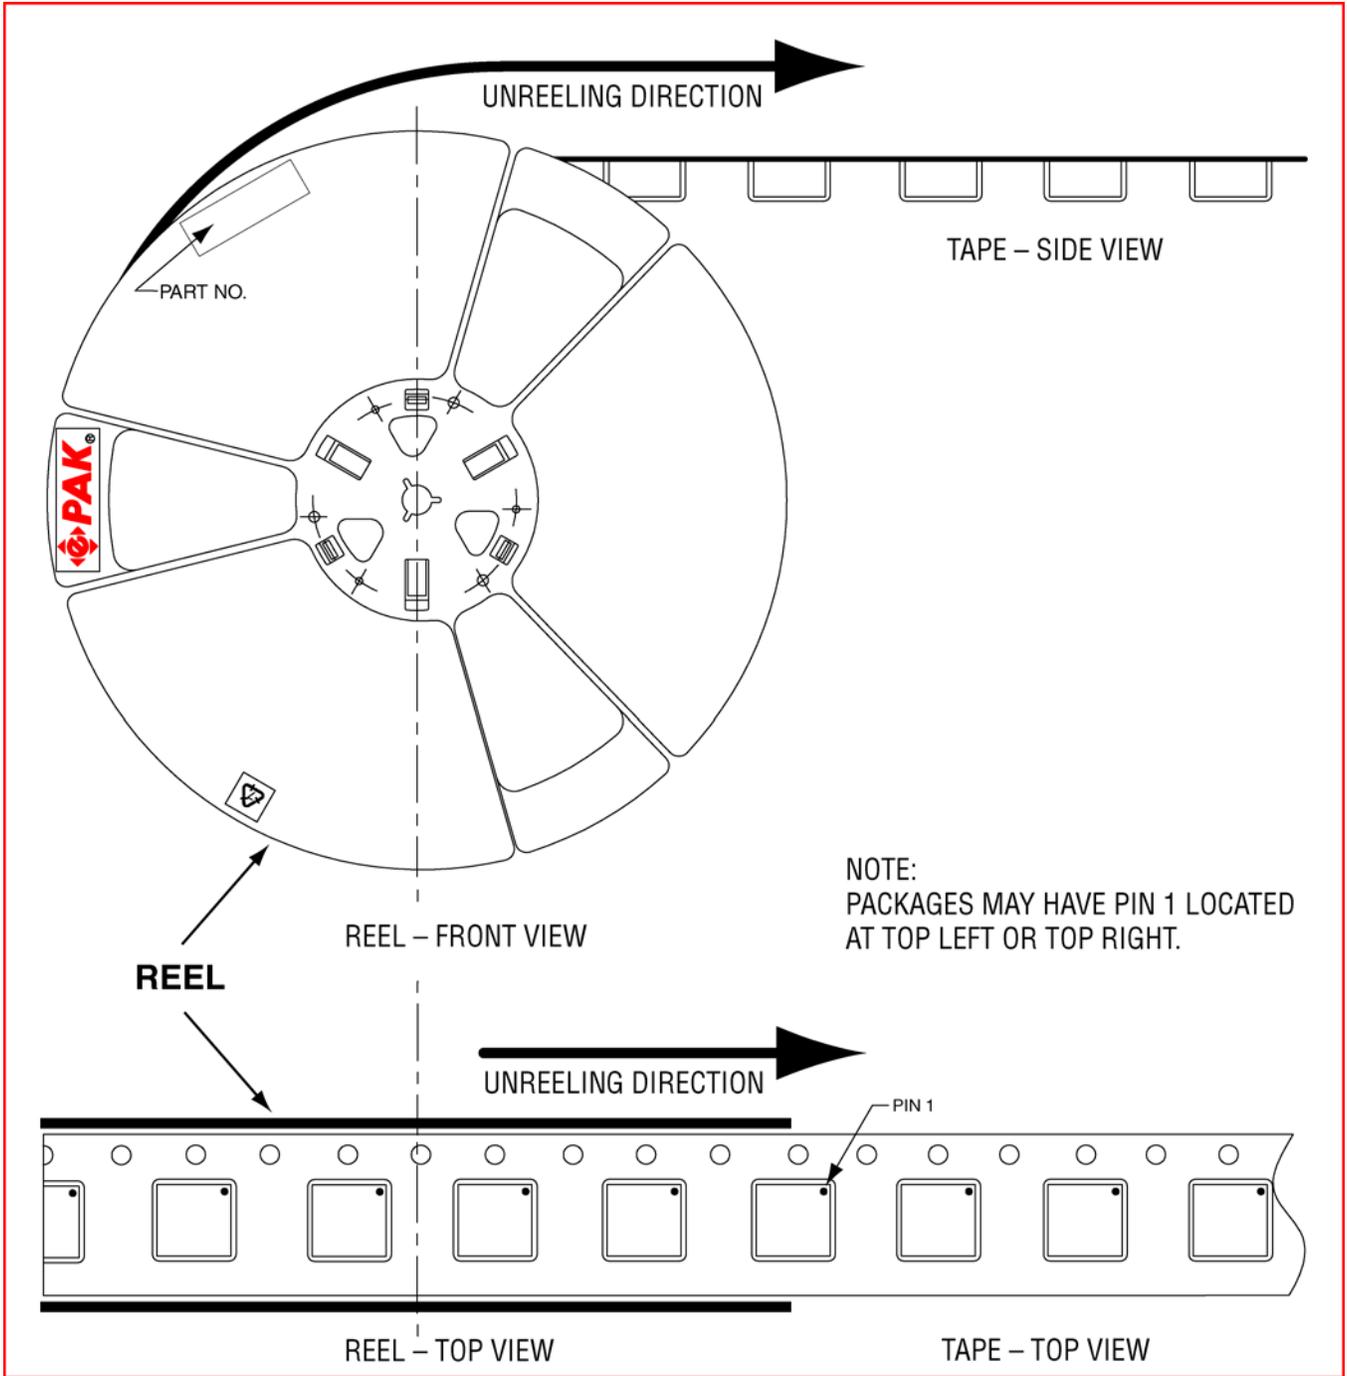

101568_010

Figure 10. Tape-to-Reel Orientation, Unreeling Direction

General Information:
Skyworks Solutions, Inc.
20 Sylvan Road
Woburn, MA 01801
www.skyworksinc.com

