



TO-252-3L Plastic-Encapsulate Transistors

CJ7809 Three-terminal positive voltage regulator

FEATURES

Maximum Output current

$$I_{OM}: 1.5 \text{ A}$$

Output voltage

$$V_o: 9\text{V}$$

Continuous total dissipation

$$P_D: 1.25 \text{ W}$$


TO-252-3L

1.IN

1

2.GND

3.OUT




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Operating Junction Temperature Range	T_{OPR}	0-+125	°C
Storage Temperature Range	T_{STG}	-55-+150	°C

ELECTRICAL CHARACTERISTICS ($V_i=10\text{V}, I_o=500\text{mA}, 0^\circ\text{C}<T_j<125^\circ\text{C}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25^\circ\text{C}$	8.65	9	9.35	V
		$11.5\text{V}\leq V_i\leq 24\text{V}, I_o=5\text{mA}-1\text{A}$ $P_o<15\text{W}$	8.55	9	9.45	V
Load Regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o=5\text{mA}-1.5\text{A}$		12	180	mV
		$T_j=25^\circ\text{C}, I_o=250\text{mA}-750\text{mA}$		4	90	mV
Line regulation	ΔV_o	$11.5\text{V}\leq V_i\leq 27\text{V}, T_j=25^\circ\text{C}$		7	180	mV
		$13\text{V}\leq V_i\leq 19\text{V}, T_j=25^\circ\text{C}$		2	90	mV
Quiescent Current	I_q	$T_j=25^\circ\text{C}$		4.3	8	mA
Quiescent Current Change	ΔI_q	$11.5\text{V}\leq V_i\leq 27\text{V}$			1	mA
	ΔI_q	$5\text{mA}\leq I_o\leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_N	$10\text{Hz}\leq f\leq 100\text{KHz}$		60		uV
Ripple Rejection	RR	$12\text{V}\leq V_i\leq 22\text{V}, f=120\text{Hz}, T_j=25^\circ\text{C}$	55	70		dB
Dropout Voltage	V_d	$T_j=25^\circ\text{C}, I_o=1\text{A}$		2		V
Short Circuit Current	I_{sc}	$V_i=35\text{V}, T_a=25^\circ\text{C}$		400		mA
Peak Current	I_{pk}	$T_j=25^\circ\text{C}$		2.2		A

TYPICAL APPLICATION

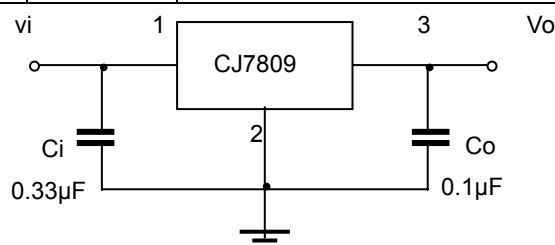

Typical Characteristics

CJ7809

