

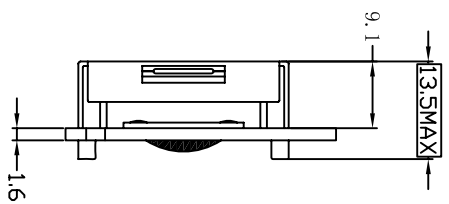


REV.	CHANGE CONTENT	BY	DATE

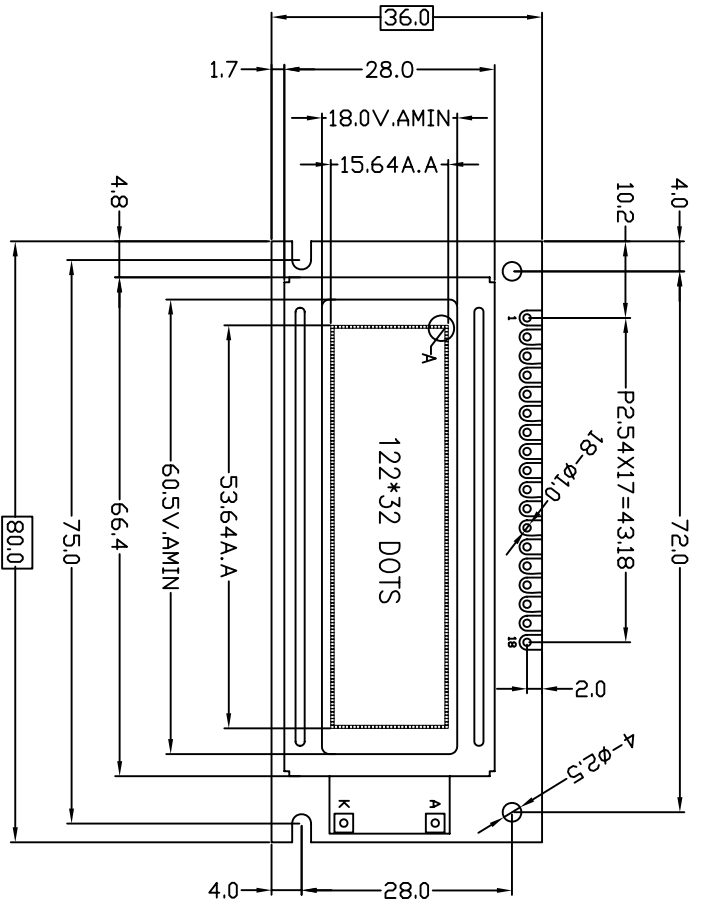

PIN No	1	2	3	4	5	6	7	8-15	16	17	18
Symbol	VSS	VDD	V0	A0	E1	E2	RW	DB0-DB7	/RST	LEDA	LEDK

Note:

1. Display Mode:STN, Y/G, POSITIVE, Transflective
 2. View Direction:6 O'Clock
 3. Driver Method: 1/32 Duty, 1/4Bias
 4. LCD Operating Voltage: 5.0V
 5. Operating Temperature: -20° C- 70° C
 6. Storage Temperature: -30° C- 80° C
 7. Controller: PT6520 COB
 8. LED: COLOR:YELLOW-GREEN 底光5.0V
- THE DIMENSION IN FRAME IS CRITICAL TO QUALITY

LED	G1223204C-L	1									
TK	G1223204C-K	1									
LCD	G1223204C-LCD-VB	1									
PCB	G1223204C-B	1									
SYMBOL	ITEM OR CODE NO.	QT	REMARK	SYMBOL	ITEM OR CODE NO.	QT	REMARK				
TOLERANCE											
>0~6	±0.10										
>6~80	±0.20										
>80~240	±0.30										
>240~400	±0.50										
// 1.0	±0.10										



HTDISPLAY CO., LTD.

DRAWING No.: HG1223204C-YF62L-VB
DRAWING TITLE: LCD MODULE

REV. : A
SCALE : -
PROJECTION: UNIT : MM
SHEET : 1/1