REV.	CHANGE CONTENT	BY	DATE

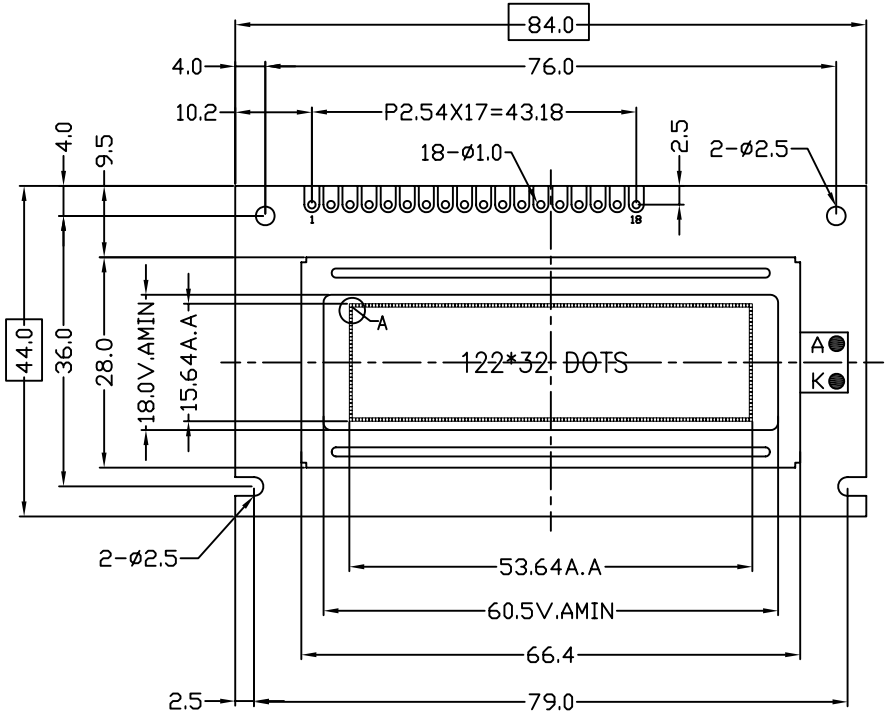

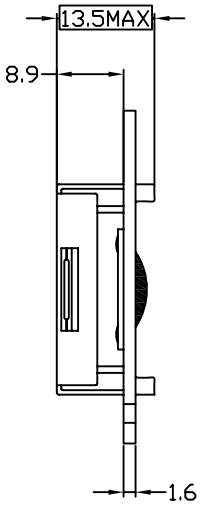



PIN No	1	2	3	4	5	6	7	8-15	16	17	18
Symbol	VSS	VDD	V0	A0	E1	E2	RW	DB0-DB7	/RST	LEDA	LEDK

Note:

1. Display Mode:STN,Y/G,POSITIVE,Transflective
2. View Direction:6 O'Clock
3. Driver Method: 1/32 Duty,1/6Bias
4. LCD Operating Voltage: 5.0V
5. Operating Temperature: -0° C- 50° C
6. Storage Temperature: -20° C- 70° C
7. Controller: PT6520 COB
8. LED: COLOR:YELLOW-GREEN 底光5.0V

THE DIMENSION IN FRAME IS CRITICAL TO QUAUTY

LED	G1223202C-L	1					
TK	G1223202C-K	1					
LCD	G1223202C-LCD	1					
PCB	G1223205C-B	1					
SYMBOL	ITEM OR CODE NO.	QT	REMARK	SYMBOL	ITEM OR CODE NO.	QT	REMARK

TOLERANCE							
>0~6 ±0.10	HTDISPLAY CO.,LTD.					DRAWING No.:HG1223205C-YF60L-VA	
>6~80 ±0.20						DRAWING TITLE:LCD MODULE	
>80~240 ±0.30	DESIGN	LZM	05.08.05	STANDARD		REV. : A	SCALE : -
>240~400 ±0.50	CHECKED			TECHNOLOGY		PROJECTION:	UNIT : MM
//⊥◎ ±0.10	APPROVED			Q.A			SHEET : 1/1

www.DataSheet4U.com