


UL·CSA (TV-3) Rating Rocker Switches

EST-1060

- UL Listed: TV-3 Rating (File No.E36636)
CSA Listed: TV-3 Rating (File No.LR29638)
- Good snap action
- Circuitry

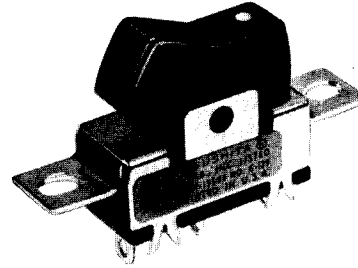

EST-1060

	SPDT	SPST
Part No.	EST-1060D	EST-1060

Specifications

Mechanical Characteristics	Lever Strength	To withstand 2kg (4.4 lbs) push applied to the rocker arm	Electrical Characteristics	Humidity	30 minutes after being subjected to 40°±20°C, 90 - 95%RH for 48 hrs; Withstanding Voltage: 1,000V AC for 1 minute Insulation Resistance: 10MΩ min. at 500V DC
	Operating Force	300g to 1,000g (10.6 oz to 35.3oz)		Rating	TV-3 (UL, CSA), 3A 125V AC
Electrical Characteristics	Contact Resistance	25mΩ max. at 1A DC		Life	TV-3: 25,000 cycles
	Dielectric Strength	Terminal-Frame: 1,000V AC (50 or 60Hz for 1 minute)			
	Insulation Resistance	100MΩ min. at 500V DC			

Dimensions

Standard Packing ...

1,600 pcs., 2.6 cft., 20 kg (45 lbs)

Unit: mm (inch)

