




- ◆ Dual PTH Type.
- ◆ Meet CCITT & FCC designed.
- ◆ High isolation voltage 1,500Vrms.

### Specification :

Part No	Turn Ratio	OCL (mH)min.	L <sub>L</sub> (uh)max	C <sub>ww</sub> (pf)max	DCR Pri (Ω)max	DCR sec (Ω)max	Schematic	Primary Pins
14PT-565	1:1.15CT & 1:2CT	1.50 & 1.20	0.60 & 0.40	35 & 40	0.70 & 0.70	1.10 & 1.10	S-1	14-12, 5-7
14PT-566	1:1:1.266 & 1:2CT	1.50 & 1.20	0.50 & 0.40	35 & 40	0.70 & 0.70	0.90 & 1.10	S-1	14-12, 5-7
14PT-774	1CT:2CT & 1:1.36CT	1.20 & 1.20	0.96 & 0.80	50 & 50	1.00 & 1.00	1.70 & 1.20	S-6	14-12, 5-7
14PT-951	1:2CT & 1:2CT	1.20 & 1.20	0.50 & 0.50	35 & 35	0.70 & 0.70	1.20 & 1.20	S-1	14-12, 5-7
14PT-952	1:2CT & 1:1.36CT	1.20 & 1.20	0.50 & 0.80	35 & 35	0.80 & 0.80	1.20 & 1.00	S-2	14-12, 5-7
14PT-953	1:2CT & 1:2CT	2.00 & 2.00	0.60 & 0.60	45 & 45	0.70 & 0.70	1.20 & 1.20	S-3	14-12,10-8
14PT-954	1CT:2CT & 1:1	1.20 & 1.20	0.60 & 0.50	30 & 30	0.70 & 0.70	1.20 & 0.70	S-4	1-3, 5-7
14PT-955	1.58:2CT & 1.58:1	0.80 & 0.80	0.50 & 0.50	30 & 30	0.60 & 0.60	0.70 & 0.30	S-5	1-3, 5-7
14PT-956	2:2CT & 2:1	0.80 & 0.80	0.60 & 0.60	30 & 30	0.50 & 0.50	0.50 & 0.20	S-5	1-3, 5-7
14PT-957	2.62:2CT & 2.62:1	1.20 & 1.20	0.80 & 0.80	30 & 30	0.60 & 0.60	0.50 & 0.30	S-5	1-3, 5-7

### Schematic :

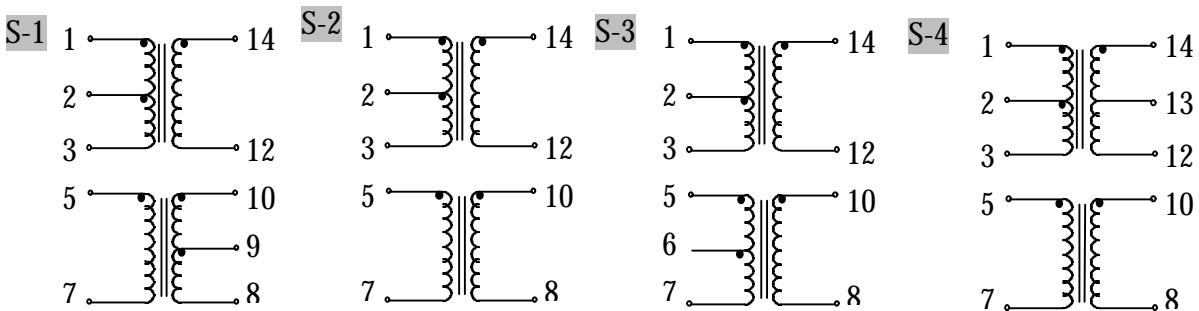

### Dimension :

