



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.



Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.

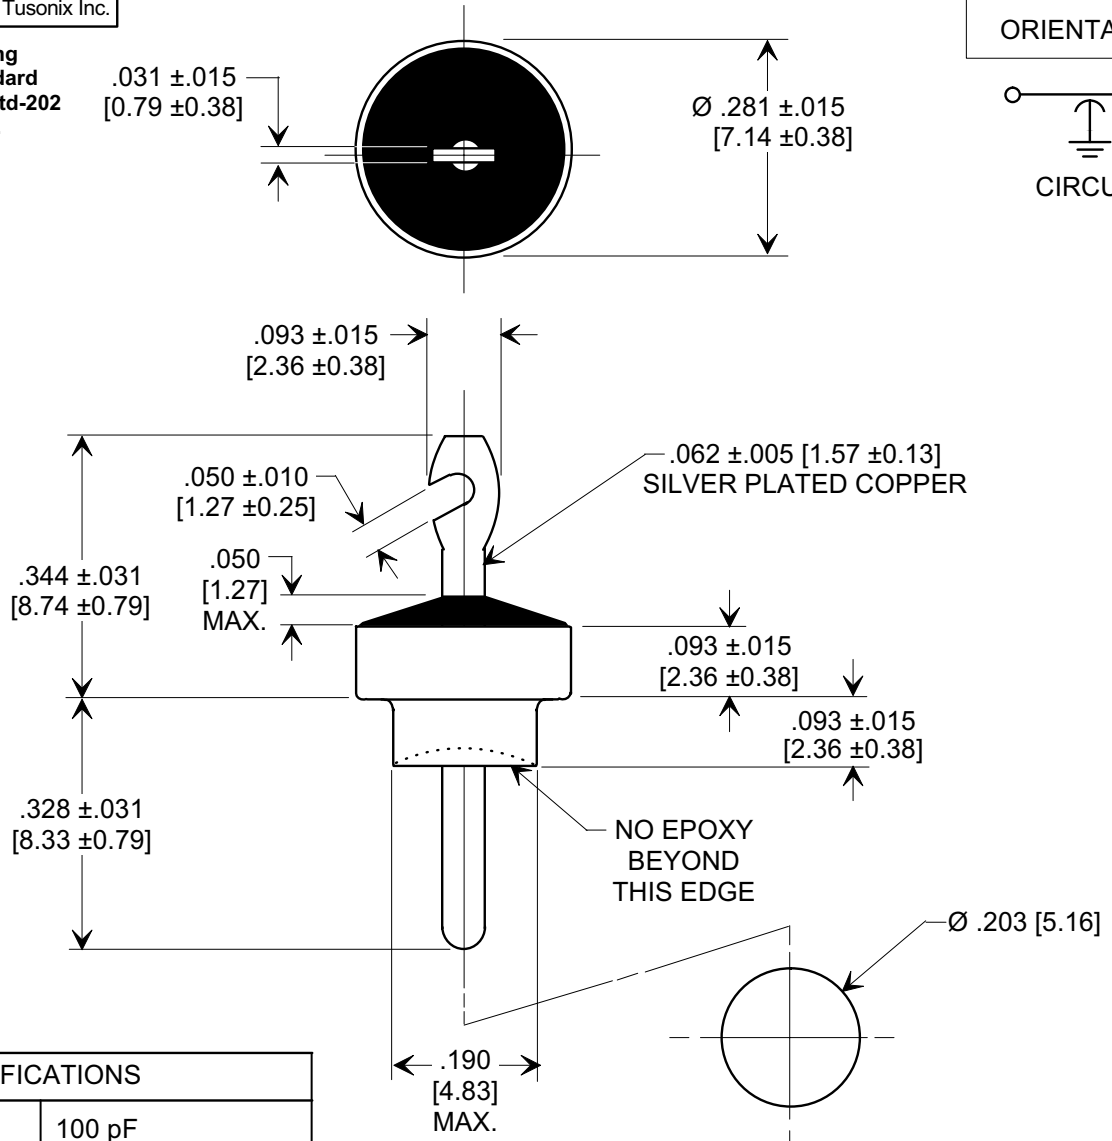

SPECIFICATIONS

CAP. VALUE:	100 pF
CAP. TOL.:	+100% -0%
TEMP. CHAR.:	X5R
RATING:	500 VDC @ +85°C
OPERATING RANGE:	-55°C TO +85°C
CURRENT (A)	20
I.R. MIN.	10 G Ω
D.W.V.	1500 VDC
MARKING: CAP CODE	BLACK DOT

NOTES:

1. TUSONIX STANDARD PART NUMBER: 2450-011-X5R0-101P.
 TUSONIX RoHS COMPLIANT PART NUMBER: 2450-011-X5R0-101P LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD FINISH: SILVER PLATED.
3. BUSHING FINISH: SILVER PLATED.
4. PART MARKING: STANDARD PART: BLACK DOT. RoHS PART: ADDITIONAL GREEN DOT.

X-2015 Rev-0

REVISION RECORD Original Release C.O. 20070619-3-01	0

--TOLERANCES-- Unless Otherwise Specified	
DECIMAL ±	NOTED
ANGLES ±	
TUSONIX TUCSON, ARIZONA	

Title		DISCOIDAL FEED-THRU CAPACITOR	
Drawn	S.M. 06-19-07	Scale	4 X
Approved	R.L. 06-19-07		
A	2450-011-X5R0-101P		