

Ratings and characteristics of diode module with Brake (draft)

Type : 6R1MBi100P-160-03

1. Maxmum rating(at Tj=25°C / Tc=25°C unless otherwise specified)

Item		Symbol	Condition		Max.	Unit
Converter	Repetitive peak reverse voltage	V_{RRM}			1600	V
	Non-repetitive peak reverse voltage	V_{RSM}			1900	V
	Average output current	I_o	50Hz/60Hz sine wave Tc=110°C		100	A
	One cycle surge current (50Hz)	I_{FSM}	From rated load		1000	A
	I^2t	I^2t	From rated load		4000	A ² s
	Operation junction temperature	T_j			-40 to +150	°C
Brake	Collector-Emitter voltage	V_{CES}			1400	V
	Gate-Emitter voltage	V_{GES}			±20	V
	Collector current	I_c	DC	Tc=25°C	75	A
				Tc=75°C	50	
		I_{cp}	1ms	Tc=25°C	150	A
				Tc=75°C	100	
	Collector power dissipation	P_c			230	W
	Repetitive peak reverse voltage	V_{RRM}			1400	V
	Operation junction temperature	T_j			-40 to +150	°C
Storage junction temperature	T_{stg}			-40 to +125	°C	
Isolation voltage	V_{iso}	AC:1min		3000	V	
Mounting screw torque		M5 screw		2.0 to 2.5	N·m	

2. electrical characteristics (at Tj=25°C / Tc=25°C unless otherwise specified)

Item		Symbol	Condition	min.	typ.	Max.	Unit	
Co.	Forward voltage	V_{FM}	$I_{FM}=100A$			1.30	V	
	Reverse current	I_{RRM}	Tj=150°C, $V_R=1600V$			20.0	mA	
Brake	Zero gate voltage Collector current	I_{CES}	$V_{GE}=0V, V_{CE}=1400V$			1.0	mA	
	Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=\pm 20V$			200	nA	
	Collector-Emitter saturation voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_c=50A$		2.4	2.7	V	
	Turn-on time	t_{on}	$V_{cc}=800V$ $I_c=50A$			0.35	1.20	us
		t_r				0.25	0.60	
	Turn-off time	t_{off}	$V_{GE}=\pm 15V$ $R_G=25\Omega$			0.45	1.00	us
		t_f				0.08	0.30	
Reverse current	I_{RRM}	$V_R=V_{RRM}$				1.0	mA	

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

	DATE	NAME	APPROVED	Fuji Electric Co.,Ltd.		
DRAWN	Sep-12-02	H. Kameda		DWG NO	MT5T02215	1/3
CHECKED	Sep-12-02	N. Matsuda				
REVISIONS						

3. Thermal characteristics

Item	Symbol	Condition		min.	typ.	Max.	Unit
Thermal resistance	$R_{th(j-c)}$	Converter	Per total loss			0.14	°C/W
			Per each device			0.84	
		Brake IGBT (1device)				0.55	
Thermal resistance (case to fin)	$R_{th(c-f)}$	with thermal compound				0.08	°C/W



4. Outline drawing and equivalent circuit is shown in page 3/3

Note : This product is selection version of VRSM $\geq 1900V$ from 6R1MBi100P-160-02
All of reliability test condition is also based on 6R1MBi100P-160-02.


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

REVISIONS	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	DWG. NO.	MT5T02215 2/3				
	DRAWN	- -								
	CHECKED	- -								

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

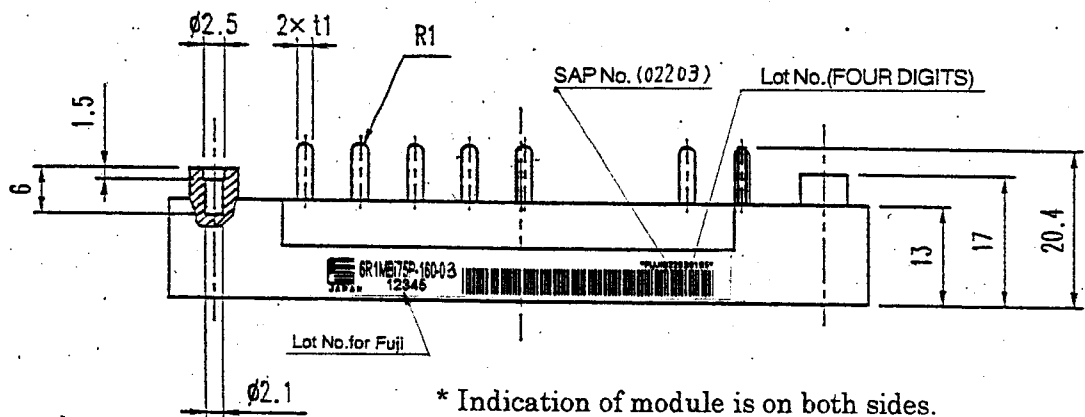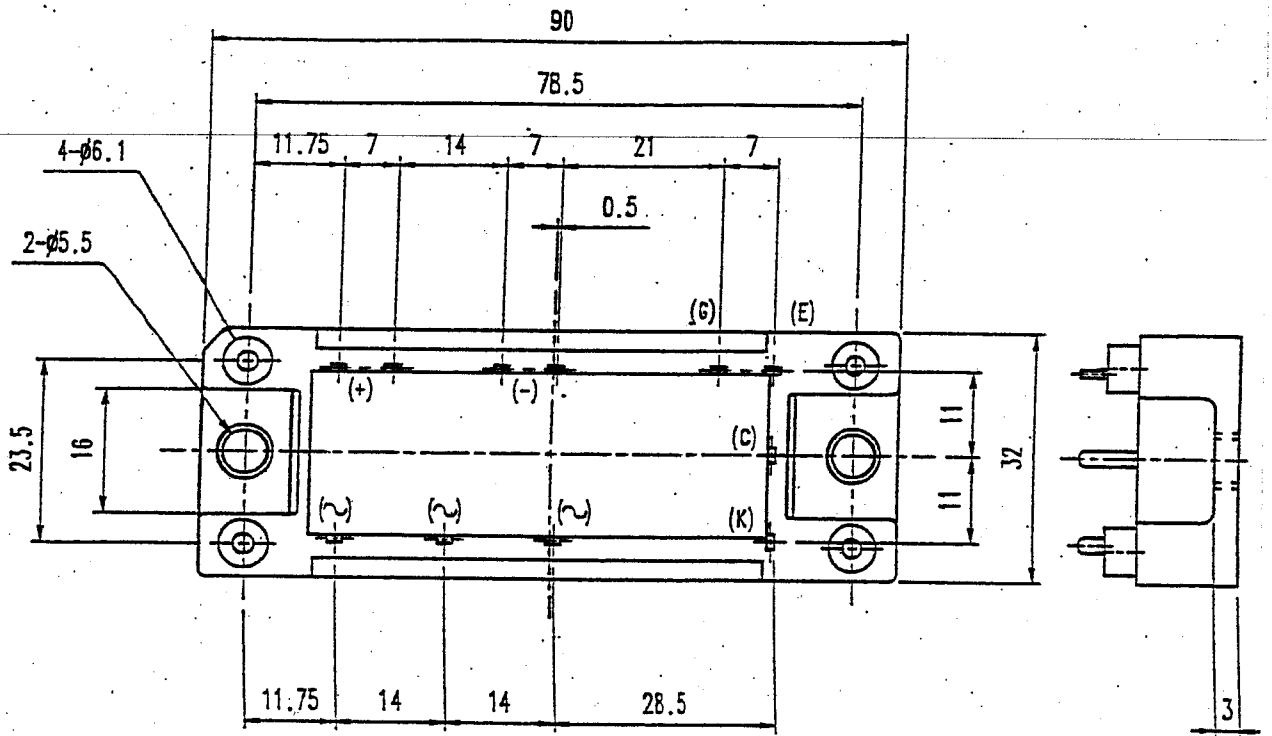

* Indication of module is on both sides.

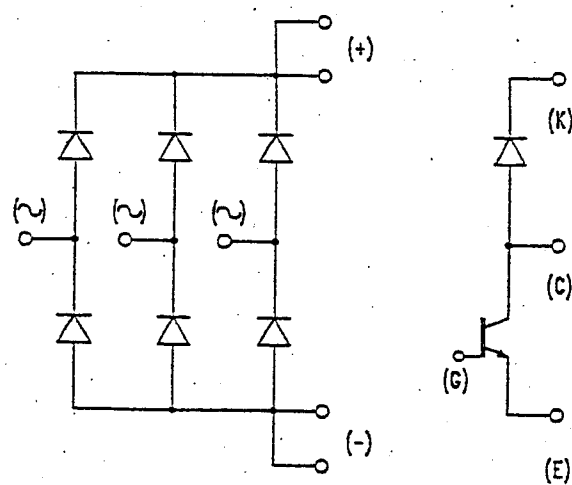

REVISIONS			
DRAWN	-		
CHECKED	-		

DATE	NAME	APPROVED

Fuji Electric Co.,Ltd.	
DWG. NO.	MT5T02215 3/3