

bel

defining a degree of excellence

Type CIQ**Surface Mount Very Fast-Acting Chip Fuse**

I206 size

CIQD0104

**Electrical Characteristics**

(UL/CSA STD. 248-14)

Testing current	Blow Time	
	Minimum	Maximum
100%	4 hrs	N/A
200%	N/A	5 sec
300%	N/A	0.2 sec

Approvals

Safety Agency Approvals	Amp range / Volt @ I.R. ability
Listed File No. E20624	250mA-5A / 125V AC@ 100A and 63V DC@ 50A
Certified File No. LR39772	250mA-3A / 125V AC@ 100A and 63V DC@ 50A

Environmental Specification**Soldering Techniques & Compatibility**

Reflow: Industrial standard, 260°C peak

Wave Solder: 260°C, 10 sec max. (MIL-STD-202, Method 210)

ShockMIL-STD-202, Method 213, Test Condition I
(100 G's peak for 6 milliseconds)**Vibration**MIL-STD-202, Method 201 (10-55 Hz, 0.06 inch,
total excursion)**Salt Spray**

MIL-STD-202, Method 101, Test Condition B (48 hrs)

Insulation ResistanceMIL-STD-202, Method 302, Test Condition A
(After Opening) 10,000 ohms minimum**Solderability**

MIL-STD-202, Method 208

Resistance to Solder HeatMIL-STD-202, Method 210, Test Condition F
(260°C, 20 sec)**Thermal Shock**MIL-STD-202, Method 107, Test Condition B
(-65°C to +125°C)**Operating Temperature**

-55°C to +125°C

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% I_n (Volt) max.	Melting I^2t @10° I_n (A ² Sec)	Maximum Power Dissipation (W)
CIQ 250	250mA	0.88	0.31	0.0002	0.10
CIQ 375	375mA	0.47	0.26	0.0004	0.12
CIQ 500	500mA	0.32	0.23	0.001	0.14
CIQ 750	750mA	0.175	0.19	0.002	0.18
CIQ 1	1A	0.119	0.17	0.004	0.21
CIQ 1.25	1.25A	0.087	0.16	0.007	0.24
CIQ 1.5	1.5A	0.070	0.15	0.010	0.28
CIQ 2	2A	0.049	0.14	0.020	0.35
CIQ 2.5	2.5A	0.038	0.14	0.034	0.43
CIQ 3	3A	0.032	0.14	0.052	0.52
CIQ 3.5	3.5A	0.028	0.14	0.076	0.62
CIQ 4	4A	0.025	0.14	0.10	0.71
CIQ 5	5A	0.021	0.15	0.17	0.96

Consult manufacturer for other ratings

Physical Specification**Materials**


Ceramic Substrate / Printed Element

Marking

On fuse:

None

Label on reel:

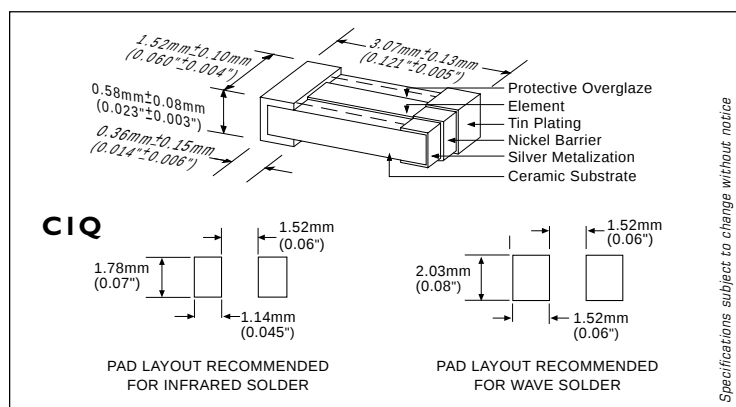"bel", "CIQ", "Current Rating", "125V; Interrupting Ratings" &
"UL" **Packaging**5,000 fuses in 7 inches dia. reel, 8 mm wide tape, 4mm pitch,
per EIA-481 (equivalent IEC-286 part 3)**Mechanical Dimensions**

ORDERING INFORMATION SEE PAGES 67 & 68


Type CIQ

Surface Mount Very Fast-Acting Chip Fuse

I206 size

CIQC0801

CIQ - TIME CURRENT CHARACTERISTIC CURVE

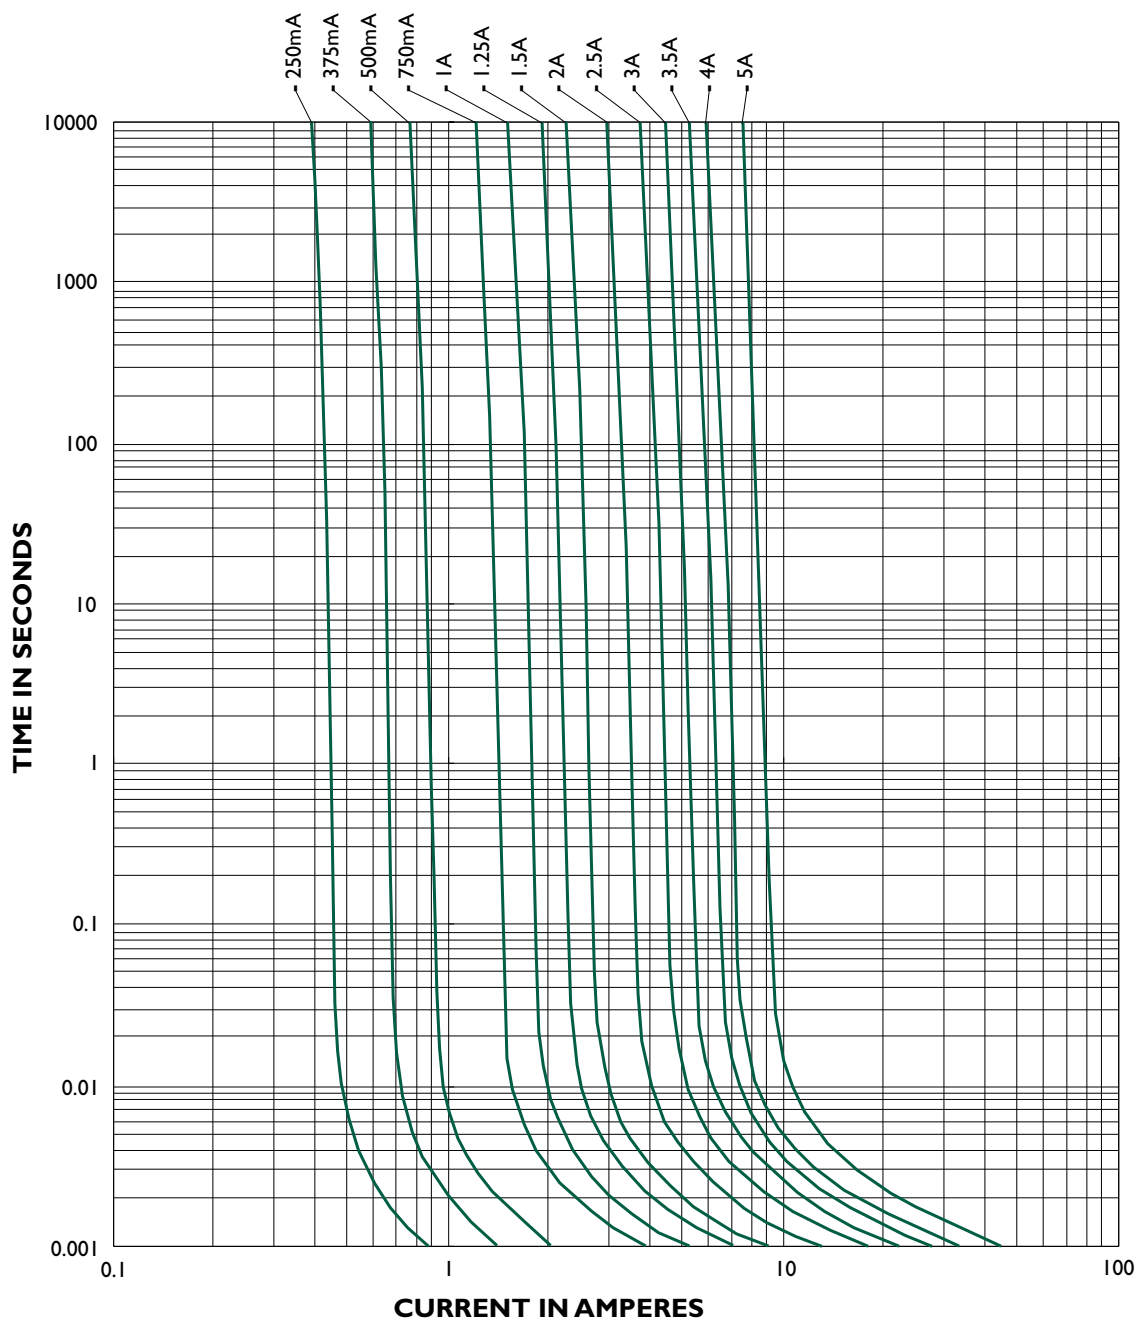

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Corporate Office

Bel Fuse Inc.

206 Van Vorst Street, Jersey City, NJ 07302
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: belfuse@belfuse.com
Website: www.belfuse.com

Far East Office

Bel Fuse Ltd.

8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.

Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K
Tel: 44-1772-556601
Fax: 44-1772-888366