



Fixed-DIP-Delay Lines

SERIES: 1502

$$T_D/T_R = 3/1$$

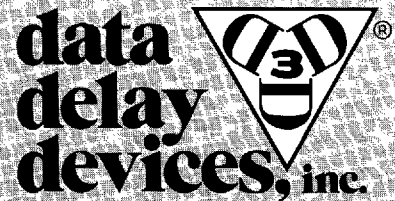

Specifications:

- Standard 14 lead I.C. case.
- 50 vdc withstanding voltage.
- $T_d/t_r \geq 3/1$.
- Impedance: 100 to 500 ohms.
- Taps available on request.
- Taps accuracy: $\pm 5\%$ of tap delay.
- Temperature coefficient: 100 PPM/°C.

Part No.	Td (ns)	Ro (ohms)	Part No.	Td (ns)	Ro (ohms)	Part No.	Td (ns)	Ro (ohms)
1502-1	5	100	1502-19	80	200	1502-37	60	300
1502-2	10	100	1502-20	5	250	1502-38	80	300
1502-3	15	100	1502-21	10	250	1502-39	100	300
1502-4	20	100	1502-22	15	250	1502-40	10	350
1502-5	40	100	1502-23	20	250	1502-41	20	350
1502-6	5	150	1502-24	30	250	1502-42	30	350
1502-7	10	150	1502-25	40	250	1502-43	40	350
1502-8	15	150	1502-26	50	250	1502-44	50	350
1502-9	20	150	1502-27	60	250	1502-45	80	350
1502-10	30	150	1502-28	80	250	1502-46	100	350
1502-11	50	150	1502-29	100	250	1502-47	10	400
1502-12	5	200	1502-30	5	300	1502-48	20	400
1502-13	10	200	1502-31	10	300	1502-49	30	400
1502-14	15	200	1502-32	15	300	1502-50	40	400
1502-15	20	200	1502-33	20	300	1502-51	10	500
1502-16	30	200	1502-34	30	300	1502-52	20	500
1502-17	40	200	1502-35	40	300	1502-53	30	500
1502-18	60	200	1502-36	50	300			

