

# OBSOLETE PRODUCT

Contact Factory for Replacement Model

## PRODUCT OVERVIEW

DATEL's ADC-305 is an 8-bit, 20MHz sampling rate CMOS A/D converter.

It processes signals at speeds comparable to a full flash converter by using a sub-ranging conversion technique with multiple comparator blocks, each containing a sample and hold amplifier.

The ADC-305 features CMOS low power dis-

sipation (60mW typical) and a wide 18MHz (-1dB) input signal bandwidth.

The ADC-305-1 is packaged in 400 mil 24-pin DIP and the ADC-305-3 in 300 mil 24-pin SOP.

Other features are CMOS compatible input logic, 3-state TTL compatible output logic, +5V single power operation, self bias mode and low cost.

## FEATURES

- 8-bit resolution, 20MHz min. sampling rate
- $\pm 1/2\text{LSB}$  max. differential nonlinearity error
- 18MHz input signal bandwidth
- Subranging, S&H enclosed
- +5V single power, low 85mW max. dissipation
- CMOS compatible logic input
- 3-State TTL compatible output

INPUT/OUTPUT CONNECTIONS			
Pin	FUNCTION	Pin	FUNCTION
1	OUTPUT ENABLE (OE)	24	DGND
2	DGND	23	REF. BOTTOM (VRB)
3	BIT 8 (LSB)	22	SELF BIAS 1 (VRBS)
4	BIT 7	21	AGND
5	BIT 6	20	AGND
6	BIT 5	19	ANALOG INPUT (VIN)
7	BIT 4	18	+AVS (+5V)
8	BIT 3	17	REFERENCE TOP (VRT)
9	BIT 2	16	SELF BIAS 2 (VRTS)
10	BIT 1 (MSB)	15	+AVS (+5V)
11	+DVS (+5V)	14	+AVS (+5V)
12	CLOCK INPUT (A/D CLK)	13	+DVS (+5V)

Both the ADC-305-1 and the ADC-305-3 have the same pin assignment.

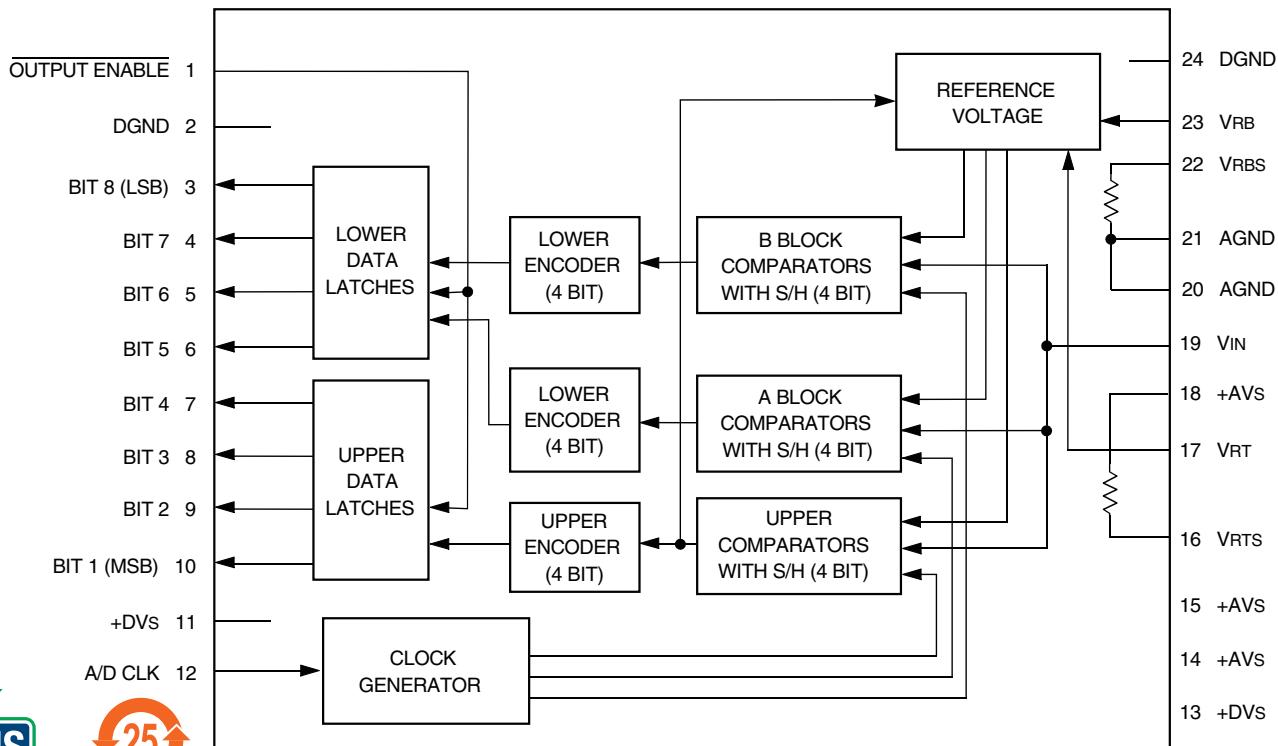


Figure 1. Functional Block Diagram



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

PARAMETERS	MIN	MAX	UNITS
Power Supply Voltage (+AVS, +DVS)	-0.5	+7	Volts
Analog Input Voltage (VIN)	-0.5	+AVS +0.5	Volts
Reference Input Voltage (VRT, VRB)	-0.5	+AVS +0.5	Volts
Digital Input Voltage (VIH, VIL)	-0.5	+DVS +0.5	Volts
Digital Output Voltage (VOH, VOL)	-0.5	+DVS +0.5	Volts

### Functional Specifications

(Specification are typical at  $T_A = +25^\circ\text{C}$ ,  $+V_{RT} = +2.5\text{V}$ ,  $V_{RB} = +0.5\text{V}$ ,  $+AVS = +DVS = +5\text{V}$ ,  $f_s = 20\text{MHz}$  sampling unless otherwise specified.)

Analog Inputs		Min.	Typ.	Max.	Units
Input Voltage Range (VIN) <sup>①</sup>		—	+0.5 to +2.5	—	Volts
Input Capacitance (VIN = 1.5Vdc+0.07VRMS)		—	11	—	pF
Input Impedance		—	12.5	—	kΩ
Input Signal Bandwidth (VIN-2Vp-p, -1dB)		—	18	—	MHz
REFERENCE INPUTS					
Ref. Resistance	VRT to VRB	230	300	450	Ω
Ref. Current		4.5	6.6	8.7	mA
Ref. Voltage <sup>②</sup>	VRT	+1.8	—	+2.8	Volts
	VRB	0	—	VRT	Volts
Offset Voltage	VRT	-10	-35	-60	mV
	VRB	0	+15	+45	mV
Self Bias I <sup>③</sup> <sup>④</sup>	VRBS	+0.6	+0.64	+0.68	Volts
	VRTS-VRBS	+1.96	+2.09	+2.21	Volts
Self Bias II <sup>③</sup> <sup>⑤</sup>	VRTS	+2.25	+2.39	+2.53	Volts
DIGITAL INPUTS					
Input Voltage (CMOS)					
Logic Levels (VIH) "1"		+4	—	—	Volts
Logic Level (VIL) "0"		—	—	+1	Volts
Input Current (@VIH=+DVS)"1"		—	—	5	μA
(@VIL=0) "0"		—	—	5	μA
Clock Pulse Width T <sub>PW1</sub>	(A/D CLK)	25	—	—	ns
	T <sub>PW0</sub>	25	—	—	ns
DIGITAL Outputs					
Output Data			8-bit Binary Parallel		
Output Voltage			3-State TTL compatible		
Output Current <sup>④</sup>					
Logic Level "1"		-1.1	—	—	mA
Logic Level "0"		+3.7	—	—	mA
Output Current <sup>⑤</sup>					
Logic Level "1"		—	—	16	μA
Logic Level "0"		—	—	16	μA
Output Data Delay, T <sub>d</sub>		—	18	30	ns
PERFORMANCE					
Resolution		8	—	—	Bit
Maximum Sampling Rate		20	—	—	MHz
Minimum Sampling Rate		—	—	0.5	MHz
Aperature Delay, T <sub>A</sub>		—	4	—	ns
Aperature Jitter		—	30	—	ps
Differential Linearity Error		—	±0.3	±0.5	LSB
Integral Linearity Error		—	+0.5	+1.3	LSB
Differential Gain Error <sup>⑥</sup>		—	1	—	%
Differential Phase Error <sup>⑥</sup>		—	0.5	—	deg

### Footnotes:

- ① See Technical Note 4
- ② Short VRB (pin 23) to VRBS (pin 22). Short VRT (pin 17) to VRTS (pin 16).
- ③ Short VRB (pin 23) to A GND. Short VRT (pin 17) to VRTS (pin 16).

- ④ OE=OV, VOH=+DVS-0.5V, VOL=+0.4V
- ⑤ OE=+DVS, VOH=+DVS, VOL=0V
- ⑥ NTSC 40IRE mode ramp, 14.3MHz sampling

POWER REQUIREMENTS	Min.	Typ.	Max.	Units
Power Supply (+AVs, +DVs)	+4.75	+5.0	+5.25	Volts
I A GND - D GND I	—	—	100	mV
Power Supply Current	—	12	17	mA
Power Dissipation	—	60	85	mW
Physical/Environmental				
Operating Temp. Range	-40 to +85°C			
Storage Temp. Range	-55 to +150°C			
Package Type	ADC-305-1	24-pin Plastic DIP		
	ADC-305-3	24-pin Plastic SOP		
Weight	ADC-305-1	2.0 grams		
	ADC-305-3	0.3 grams		

### Technical Notes

- The ADC-305 has separate +AVS and +DVS pins. It is recommended that both +AVS and +DVS be powered from a single supply since a time lag between start up of separate supplies could induce latch up. Other external logic circuits must be powered from a separate digital supply. +DVS (pins 11 and 13) and +AVs (pins 14, 15 and 18) should be tied together externally. DGND (pins 2 and 24) and AGND (pins 20 and 21) should also be tied together externally. Power supply grounds must be connected at one point to the ground plane directly beneath the device. Digital returns should not flow through analog grounds.
- Bypass all power lines to ground with a 0.1μF ceramic chip capacitor in parallel with a 47μF electrolytic capacitor. Locate the bypass capacitor as close to the unit as possible.
- Even though the analog input capacitance is a low 15pF, it is recommended that high frequency input be provided via a high speed buffer amplifier. A parasitic oscillation may be generated when a high speed amplifier is used. A 75 ohm resistor inserted between the output of an amplifier and the analog input of the ADC-305 will improve the situation. A resistor larger than 100 ohms may degrade linearity.
- The input voltage range is determined by voltages applied to VRT (Reference Bottom) and VRT (Reference Top). Keep to the following equations:  

$$0V \leq V_{RT} \leq V_{RB} \leq 2.8V$$

$$1.8V \leq V_{RT} - V_{RB} \leq 2.8V$$

The analog input range is normally 2Vp-p.

#### Self Bias Mode

- Tie VRT to VRBS, and tie VRT to VRTS respectively. The analog input range in this case is +0.64V to +2.73V nominal.
- Tie VRT to AGND, and tie VRT to VRTS respectively. The analog input voltage range is 0 to +2.39V in this case. These values may differ from one device to another. Voltage changes on the +5V supply have a direct influence on the performance of the device. The use of external references is recommended for applications sensitive to gain error.

#### External Reference Mode

Tie VRT to AGND, and apply +2V to VRT to use at 0 to +2V input voltage range. The reference resistance between VRB and VRT is about 300 ohms. It is important to make the output impedance of the reference source small enough while, at the same time, keeping sufficient drive capacity. Insert a 0.1μF bypass ceramic chip capacitor between VRT and GND to minimize the effect of the 20MHz clock running nearby. See Figure 5.

- Logic inputs are CMOS compatible. Normally a series 74HC is used as a driver. It is recommended to pull up to +5V if the device is driven with TTL.
- The start convert (A/D CLK) pulse can be a 50% duty cycle clock. Both TPW1 and TPW0 are 25ns minimum. A slightly longer TPW1 will improve linearity of the system for higher frequency input signals.
- The digital data outputs are 3-state and TTL compatible. To enable the 3-state outputs, connect the OUTPUT ENABLE (pin 1) to GND. To disable, connect it to +5V. It is recommended that the data outputs be latched and buffered through output registers.
- Maximum 30ns (18ns typical) after the rising edge of the Nth conversion pulse, the result of the (N-3) conversion can be obtained. Data is stored firmly in an output register, such as an 74LS74, using the rising edge of a start convert pulse as a trigger. The (N-4) data is stored in this case. See the timing diagrams, Figure 2 and 4.
- The 20MHz sampling rate is guaranteed. It is not recommended to use this device at sampling rates slower than 500kHz because the droop characteristics of the internal sample and holds will then exceed the limit required to maintain the specified accuracy of the device.

Table 1. Digital Output Coding

VIN	CODE	STEP		DATA BITS OUT	
		DEC	HEX	MSB	LSB
0V	Zero ↓ +1/2FS -1LSB	0 ↓ 127	00 ↓ 7F	0 0 0 0	0 0 0 0
+0.9922V	+1/2FS	128	80	0 1 1 1	1 1 ↓ 1
+1.000V	+PS	255	FF	1 0 0 0	0 0 0 0
+1.9922V	+PS	255	FF	1 1 ↓ 1	1 1 ↓ 1

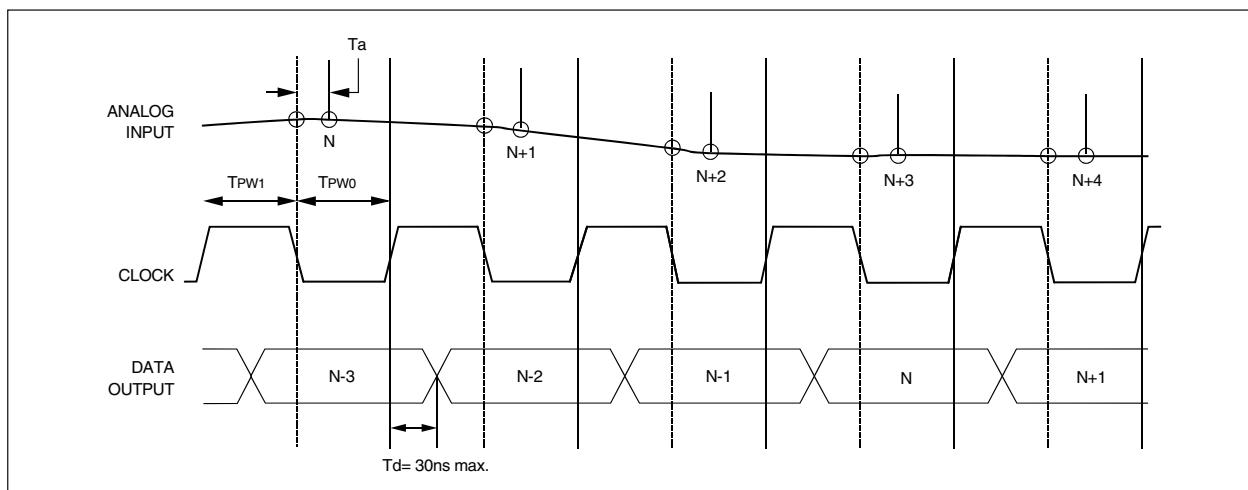


Figure 2. Timing Diagram

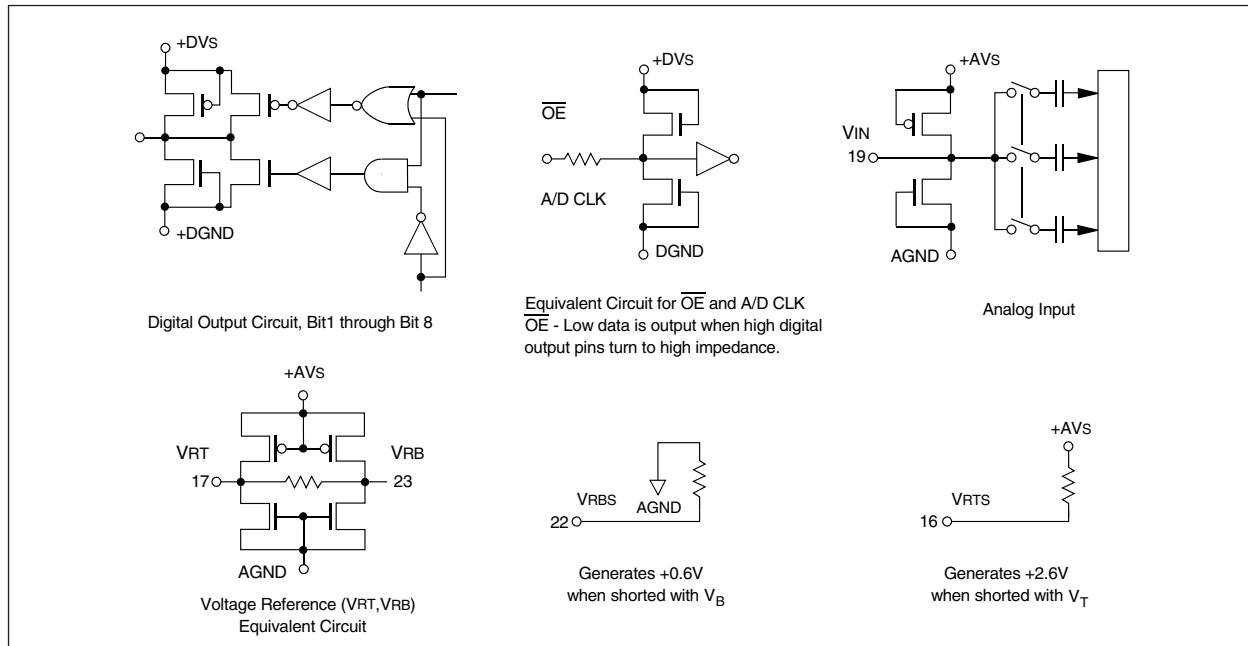


Figure 3. Equivalent Circuits

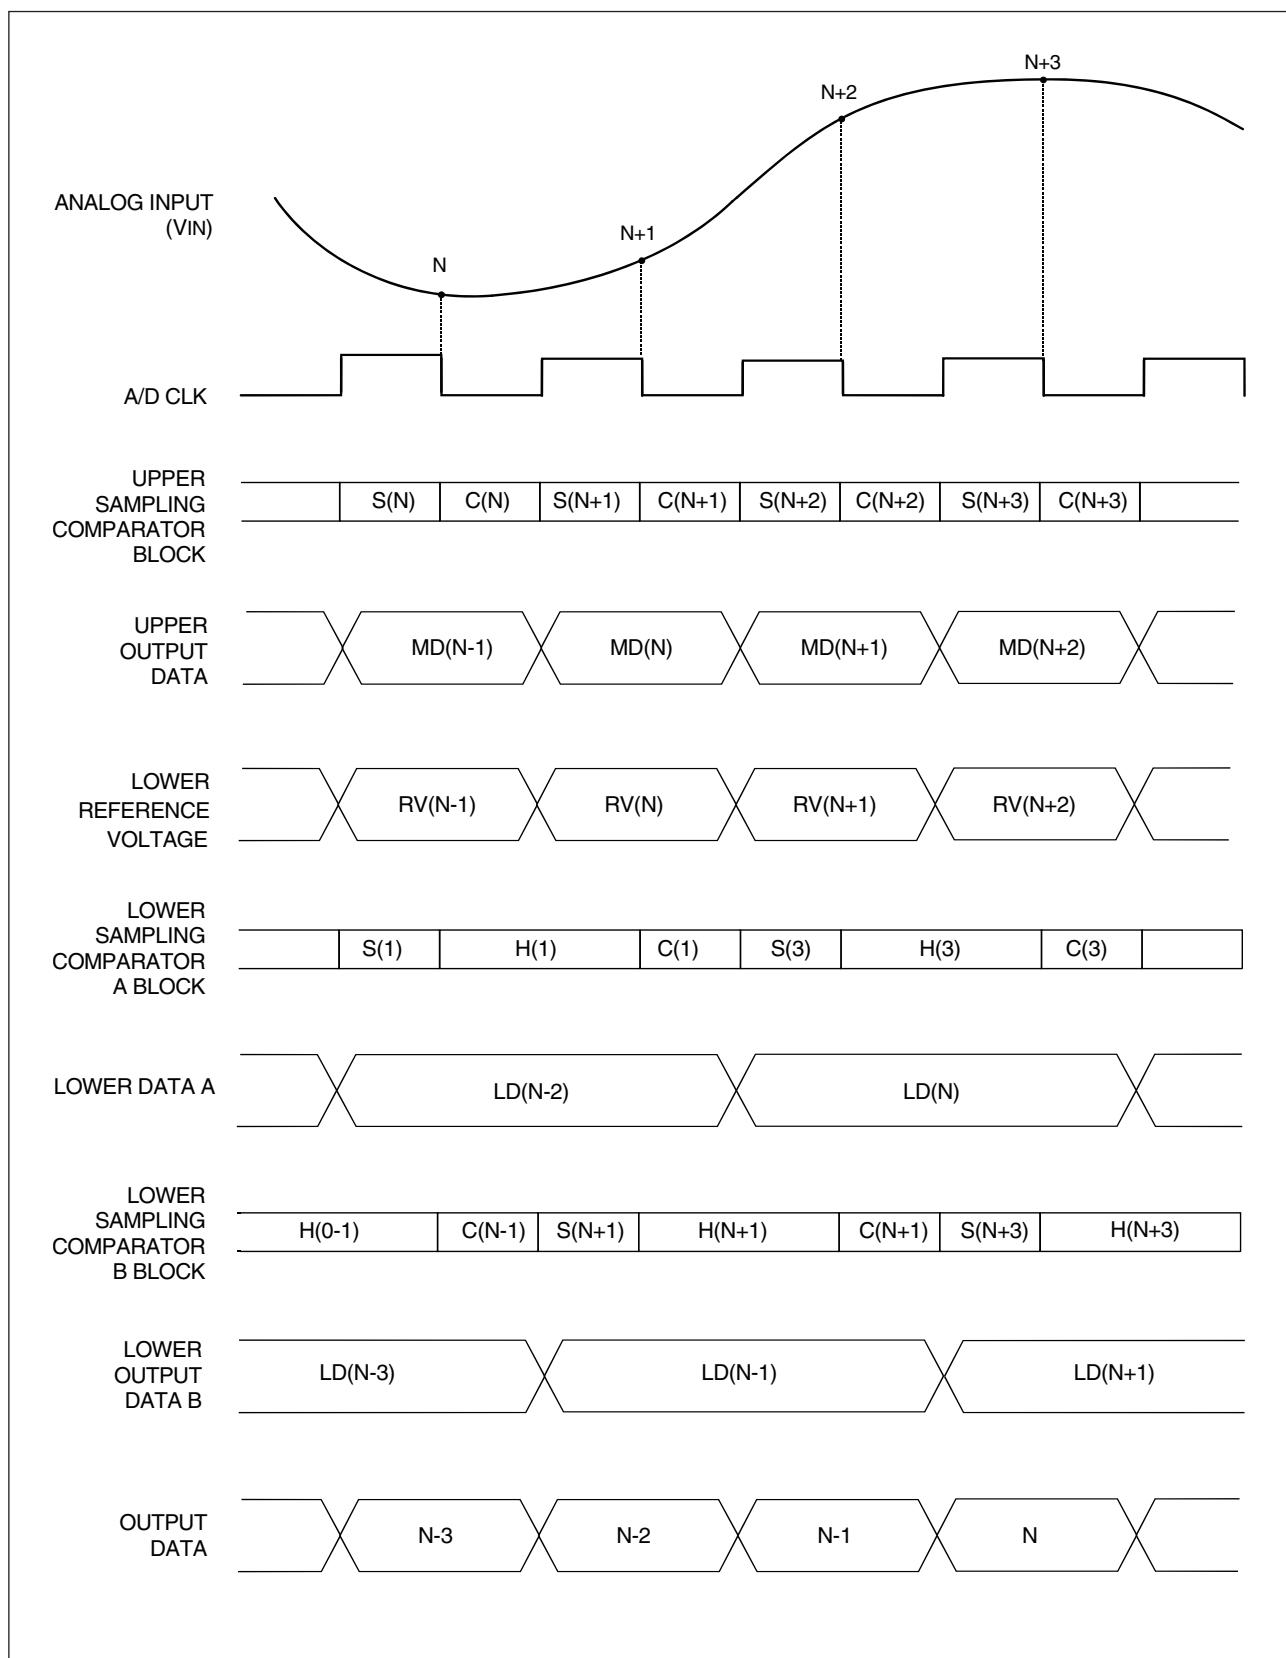


Figure 4. Timing Chart

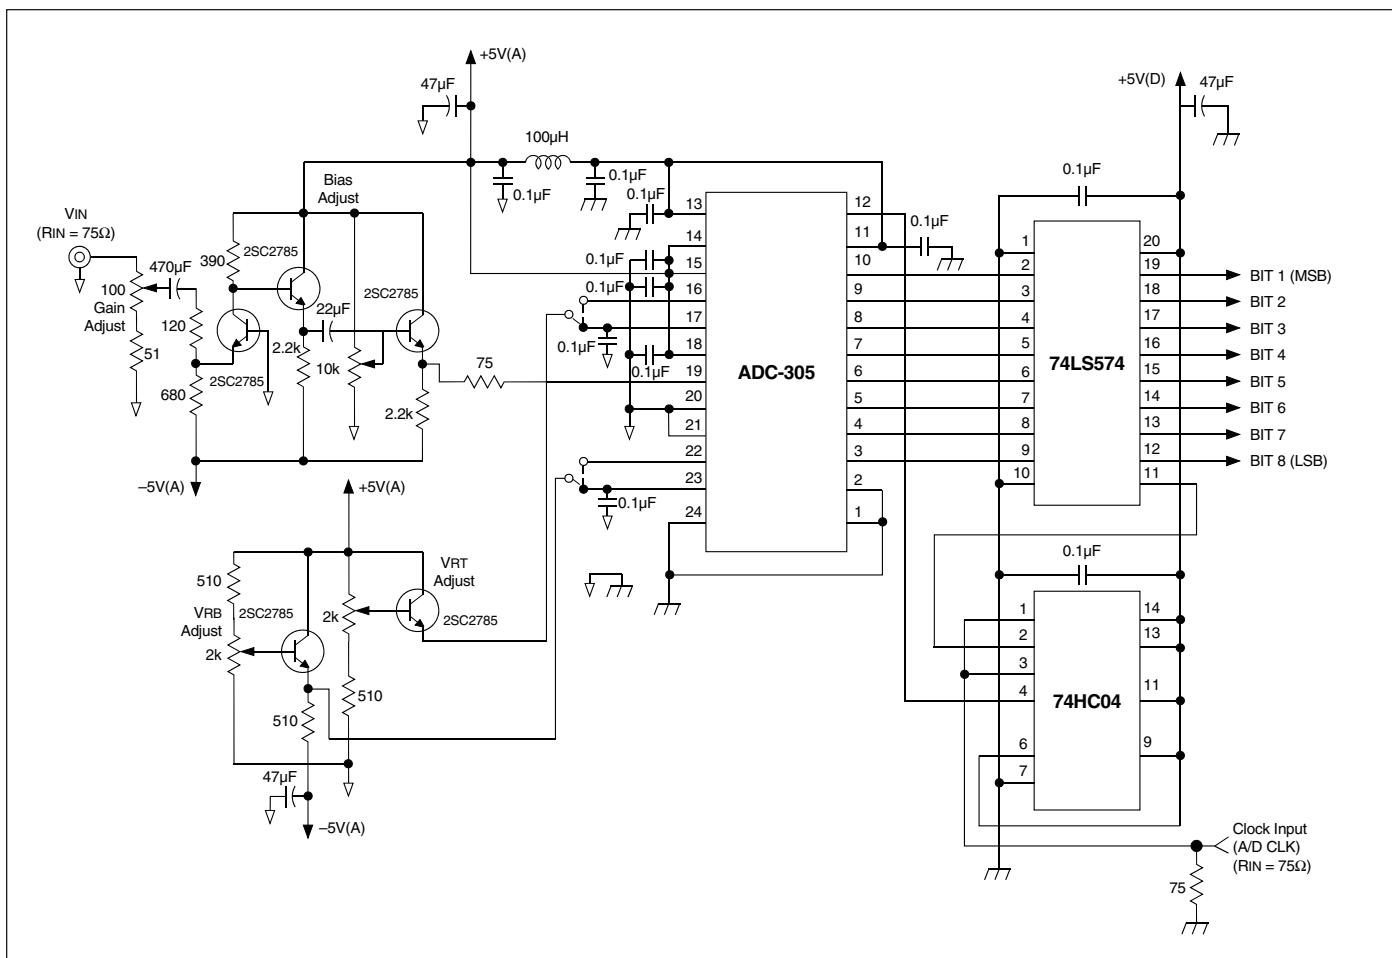


Figure 5. Typical Connection Diagram


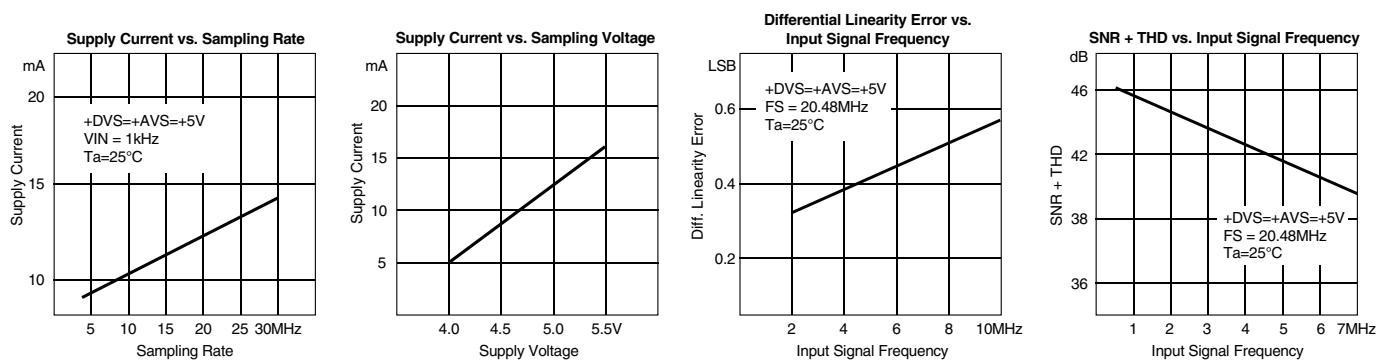


Figure 6. Typical Performance Curves

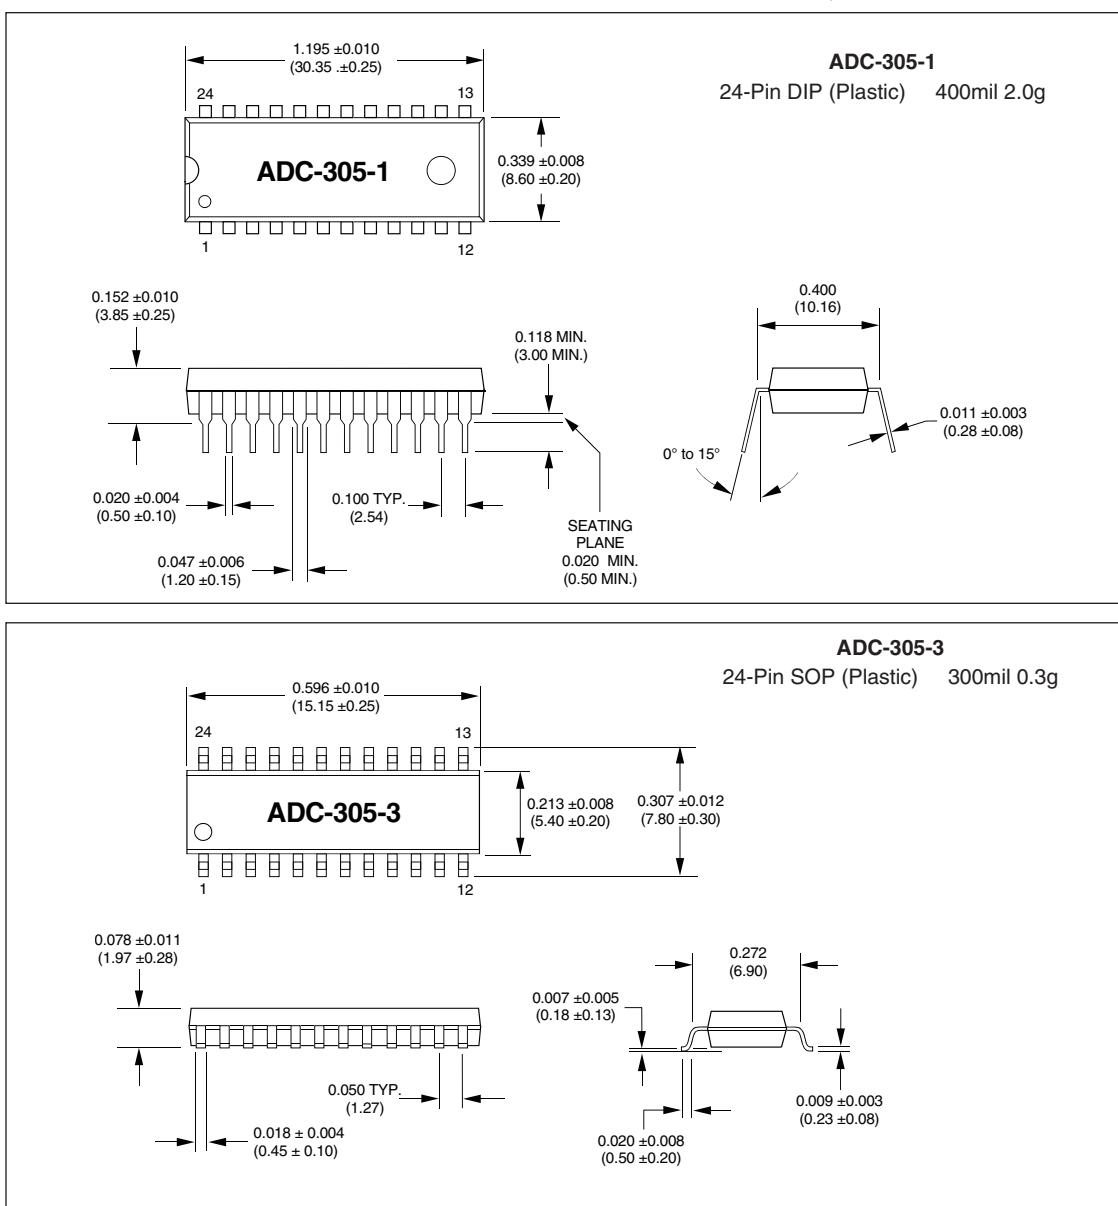

#### ORDERING INFORMATION

##### MODEL NUMBER

ADC-305-1  
ADC-305-3

##### PACKAGE

24-Pin Plastic DIP 400 mil  
24-Pin Plastic SOP 300 mil