


# Series 1330

## Unshielded Surface Mount Inductors

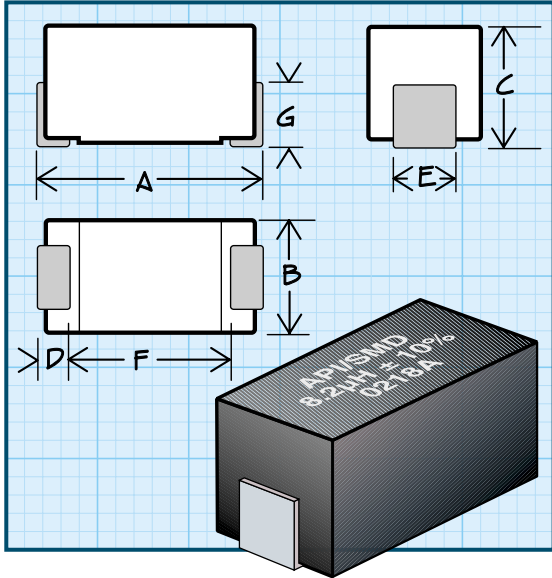

### Military QPL Approval

M83446/31 Phenolic Core

M83446/32 Iron Core

M83446/33 Ferrite Core

\* **Ordering Note** Military parts must be ordered to the M83446/ part number

### Physical Parameters

	Inches	Millimeters
A	0.300 to 0.325	7.62 to 8.26
B	0.105 to 0.125	2.67 to 3.18
C	0.125 to 0.145	3.18 to 3.68
D	0.020 Min.	0.508 Min
E	0.040 to 0.060	1.02 to 1.52
F	0.190 (Ref. only)	4.83 (Ref. only)
G	0.070 (Ref. only)	1.78 (Ref. only)

**Weight Max (Grams)** 0.30

### Operating Temperature Range

Phenolic: -55°C to +125°C

Iron and Ferrite: -55°C to +105°C

### Current Rating at 90°C Ambient

Phenolic: 35°C Rise

Iron and Ferrite: 15°C Rise

### Maximum Power Dissipation at 90°C Ambient

Phenolic: 0.210 W

Iron: 0.090 W

Ferrite: 0.073 W

**Packaging** Tape & reel (16mm): 7" reel, 500 pieces max.; 13" reel, 2200 pieces max.

*Made In the U.S.A. Patent Protected*

	PART NUMBER*	MIL DASH #	INDUCTANCE (μH) ±10%	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAX. (ma)
<b>M83446/31- SERIES 1330 PHENOLIC CORE</b>								
1330-94K	01F		0.10	40	25.0	680.0	0.08	1380
1330-96K	02F		0.12	40	25.0	640.0	0.09	1300
1330-00K	03F		0.15	38	25.0	600.0	0.10	1230
1330-02K	04F		0.18	35	25.0	550.0	0.12	1120
1330-04K	05F		0.22	33	25.0	510.0	0.14	1040
1330-06K	06F		0.27	33	25.0	430.0	0.16	975
1330-08K	07F		0.33	30	25.0	410.0	0.22	830
1330-10K	08F		0.39	30	25.0	365.0	0.30	710
1330-12K	09F		0.47	30	25.0	330.0	0.35	660
1330-14K	10F		0.56	30	25.0	300.0	0.50	550
1330-16K	11F		0.68	28	25.0	275.0	0.60	500
1330-18K	12F		0.82	28	25.0	250.0	0.85	420
1330-20K	13F		1.00	25	25.0	230.0	1.00	390
<b>M83446/32- SERIES 1330 IRON CORE</b>								
1330-22K	01F		1.20	25	7.9	150.0	0.18	620
1330-24K	02F		1.50	28	7.9	140.0	0.22	560
1330-26K	03F		1.80	30	7.9	125.0	0.30	480
1330-28K	04F		2.20	30	7.9	115.0	0.40	415
1330-30K	05F		2.70	37	7.9	100.0	0.55	355
1330-32K	06F		3.30	45	7.9	90.0	0.85	285
1330-34K	07F		3.90	45	7.9	80.0	1.00	263
1330-36K	08F		4.70	45	7.9	75.0	1.20	239
1330-38K	09F		5.60	50	7.9	65.0	1.80	195
1330-40K	10F		6.80	50	7.9	60.0	2.00	185
1330-42K	11F		8.20	55	7.9	55.0	2.70	160
1330-44K	12F		10.00	55	7.9	50.0	3.30	144
1330-46K	13F		12.0	45	2.5	40.0	2.70	160
1330-48K	14F		15.0	45	2.5	35.0	2.80	157
1330-50K	15F		18.0	45	2.5	30.0	3.10	149
1330-52K	16F		22.0	45	2.5	25.0	3.30	144
1330-54K	17F		27.0	45	2.5	20.0	3.50	140
<b>M83446/33- SERIES 1330 FERRITE CORE</b>								
1330-56K	01F		33.0	35	2.5	24.0	3.40	130
1330-58K	02F		39.0	35	2.5	22.0	3.60	125
1330-60K	03F		47.0	35	2.5	20.0	4.50	110
1330-62K	04F		56.0	35	2.5	18.0	5.70	100
1330-64K	05F		68.0	35	2.5	15.0	6.70	92
1330-66K	06F		82.0	35	2.5	14.0	7.30	88
1330-68K	07F		100.0	35	2.5	13.0	8.00	84
1330-70K	08F		120.0	30	0.79	12.0	13.00	66
1330-72K	09F		150.0	30	0.79	11.0	15.00	61
1330-74K	10F		180.0	30	0.79	10.0	17.00	57
1330-76K	11F		220.0	30	0.79	9.0	21.00	52
1330-78K	12F		270.0	30	0.79	8.0	25.00	47
1330-80K	13F		330.0	30	0.79	7.0	28.00	45
1330-82K	14F		390.0	30	0.79	6.5	35.00	40
1330-84K	15F		470.0	30	0.79	6.0	42.00	36
1330-86K	16F		560.0	30	0.79	5.0	46.00	35
1330-88K	17F		680.0	30	0.79	4.2	60.00	30
1330-90K	18F		820.0	30	0.79	3.8	65.00	29
1330-92K	19F		1000.0	30	0.79	3.4	72.00	28
<b>Optional Tolerances: J = 5% H = 3% G = 2% F = 1%</b>								

RF INDUCTORS