



multimec® 3A + 1A/1H/1M

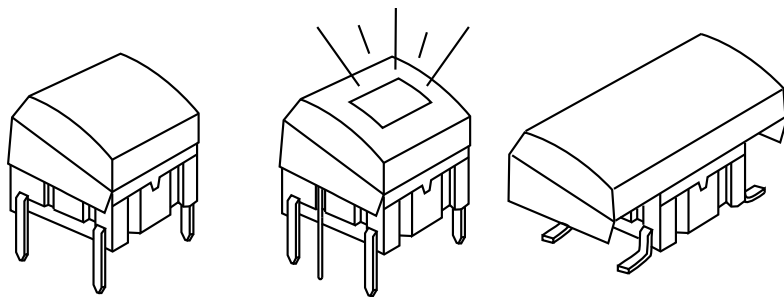


Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
low temp: -40/+65°C
high temp: -40/+160°C


Dimensions (through-hole)

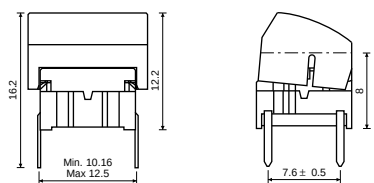


PCB layout

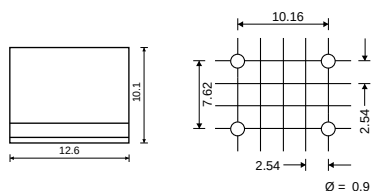


Dimensions (w/LED)

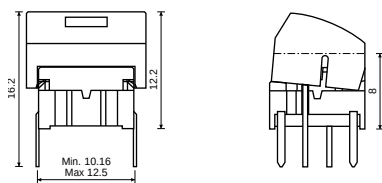


PCB layout (top view)

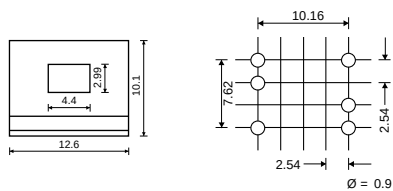

Dimensions (SMD)

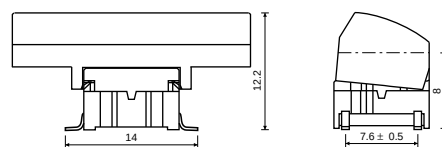

PCB layout

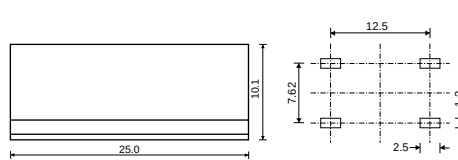

HOW TO ORDER

3 A

Switch



Mounting

T through-hole
S surface mount




L 6 low temp.
H 9 high temp.

+

1 A

Cap



00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

Standard versions:

3ATL6, 3ATH9, 3ASH9

3 A

Switch



Mounting

T through-hole



L 6 low temp.
H 9 high temp.




LED
20 green
40 yellow
80 red

+

1 H

Cap



00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black



Lens

1 transparent
2 green
4 yellow
8 red

Standard versions:

3ATL620, 3ATL640, 3ATL680

3 A

Switch



Mounting

T through-hole
S surface mount




L 6 low temp.
H 9 high temp.

+

1 M

Cap



00 blue
02 green
03 grey
04 yellow
06 white
08 red
09 black

Standard versions:

3ATL6, 3ATH9, 3ASH9

Ordering example: 3ATL680 + 1H098

MEC · Industriparken 23 · P.O. BOX 26 · DK-2750 Ballerup · Denmark

Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: <http://www.mec.dk> · E-mail: danmec@vip.cybercity.dk