





E19

SCSI-II D-SUB PCB RIGHT ANGLE

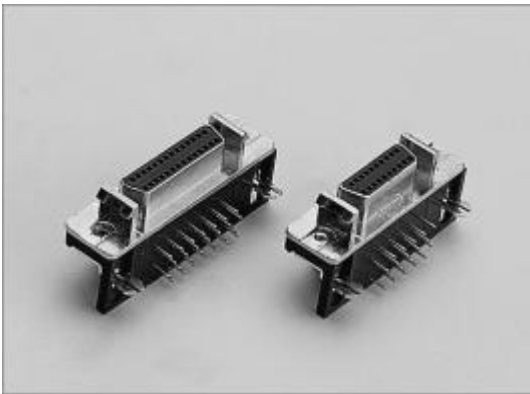


| POSITION | A | B | C | D |
|----------|-------|-------|-------|-------|
| 26F | 19.06 | 31.26 | 37.41 | 24.86 |
| 50F | 34.30 | 46.50 | 52.65 | 40.10 |



| POSITION | A | B | C | D |
|----------|-------|-------|-------|-------|
| 20F | 15.25 | 27.45 | 33.60 | 21.05 |
| 28F | 20.33 | 32.53 | 38.68 | 26.13 |
| 40F | 27.95 | 40.15 | 46.30 | 33.75 |
| 60F | 40.65 | 52.85 | 59.00 | 46.45 |
| 68F | 45.73 | 57.93 | 64.80 | 51.53 |
| 80F | 53.35 | 65.55 | 71.70 | 59.15 |
| 100F | 66.05 | 78.25 | 84.40 | 71.85 |
| 120F | 78.75 | 90.95 | 97.10 | 84.55 |

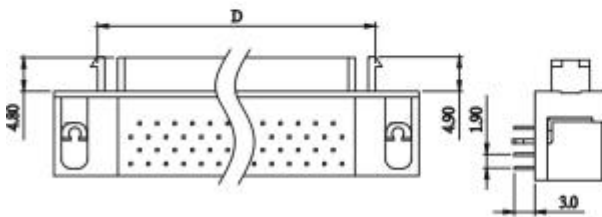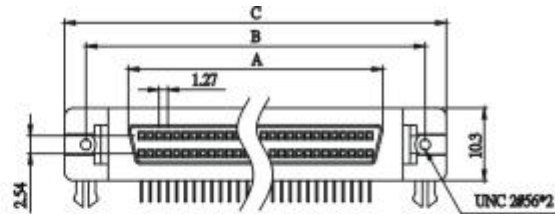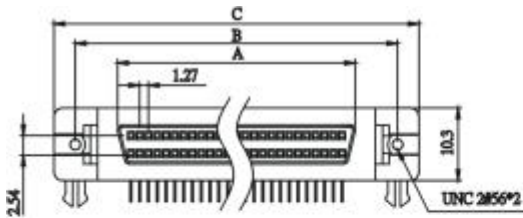


FOR : 26F,50F

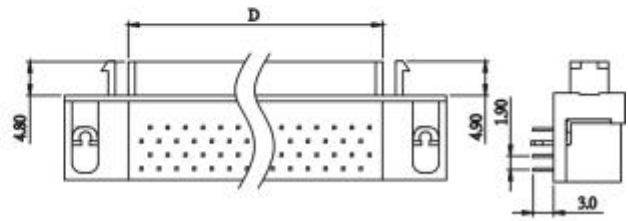

FOR : 20F,28F,40F,68F,80F,100F,120F

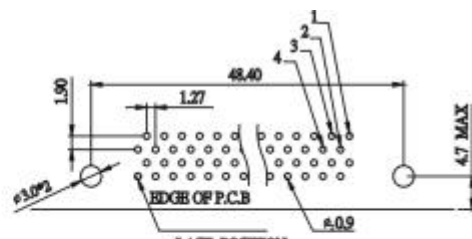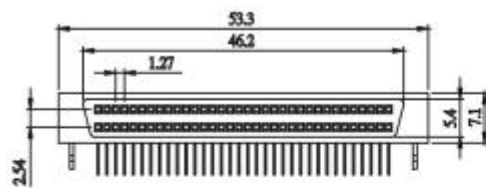


ALL PLASTIC TYPE LAYOUT PATTERN

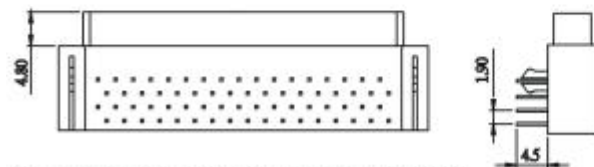


ALL PLASTIC TYPE FOR 68 POSITION FEMALE

P.C.BOARD LAYOUT PATTERN

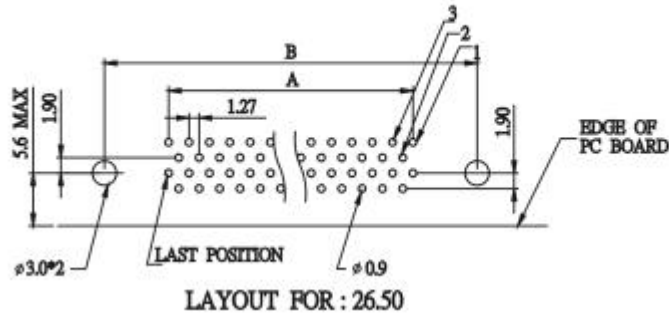

| POSITION | A | B |
|----------|-------|-------|
| 26F | 15.26 | 31.26 |
| 50F | 30.50 | 46.50 |

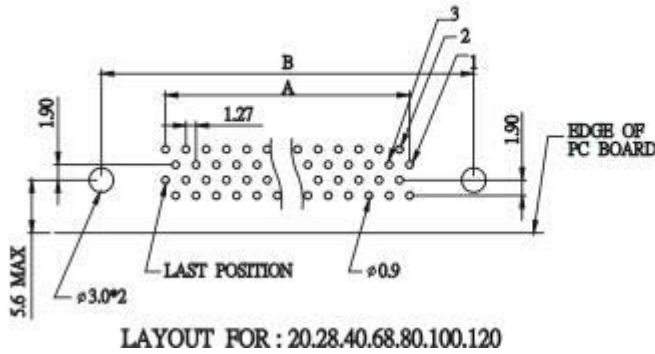

| POSITION | A | B |
|----------|-------|-------|
| 20F | 11.45 | 27.45 |
| 28F | 16.53 | 32.53 |
| 40F | 24.15 | 40.15 |
| 60F | 36.85 | 52.85 |
| 68F | 41.93 | 57.93 |
| 80F | 49.55 | 65.55 |
| 100F | 62.25 | 78.25 |
| 120F | 74.95 | 90.95 |

HOW TO ORDER:

E19 - - - - - - - -

| | | | |
|---|--|---|---|
| 1.NO. OF CONTACT 20 26 28 40 50 60 68 80 100 120 | 2.CONTACT TYPE F: FEMALE | 3.CONTACT PLATING T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD | 4.SHELL OPTION A: METAL SHELL B: ALL PLASTIC |
| 5.MOUNTING METHOD A: THREAD INSERT 2-56 UNC B: THREAD INSERT 4-40 UNC C: THREAD INSERT M3 D: THREAD INSERT M2.6 O: NON OPTION | 6.PARTS OPTION A: WITH FRONT LATCH B: WITHOUT FRONT LATCH | 7.BOARDLOCK OPTION A: BOARDLOCK (Z-SHAPE) B: L-SHAPE | 8.INSULATOR COLOR 1. BLACK |