



CONNOR-WINFIELD
CORPORATION

AURORA, IL. 60505


PHONE (708) 851-4722

FAX (708) 851-5040

OSCILLATORS

8 PIN DIP HIGH SPEED CMOS CUSTOM FREQUENCIES

SPECIFICATIONS	H42	H53	H63	H73
Frequency Range	250Hz to 60MHz			
Frequency Tolerance	+/- .005%	+/- .01%	+/- .01%	+/- .01%
Temperature Range	-25 to +75 degrees C	0 to +70 degrees C	-40 to +85 degrees C	-55 to +125 degrees C
Output	High Speed CMOS Squarewave Duty Cycle: 50/50 +/-2% Typ			
Supply Voltage	+5Vdc +/-10%			
Supply Current	25mA Max			
Package	All metal, hermetically sealed, welded package			
Options (add suffix to model no)	A	External Frequency Adjust +/-10ppm		
	G	Gating Logic 0 Enable, Logic 1 Disable (<25MHz only)		

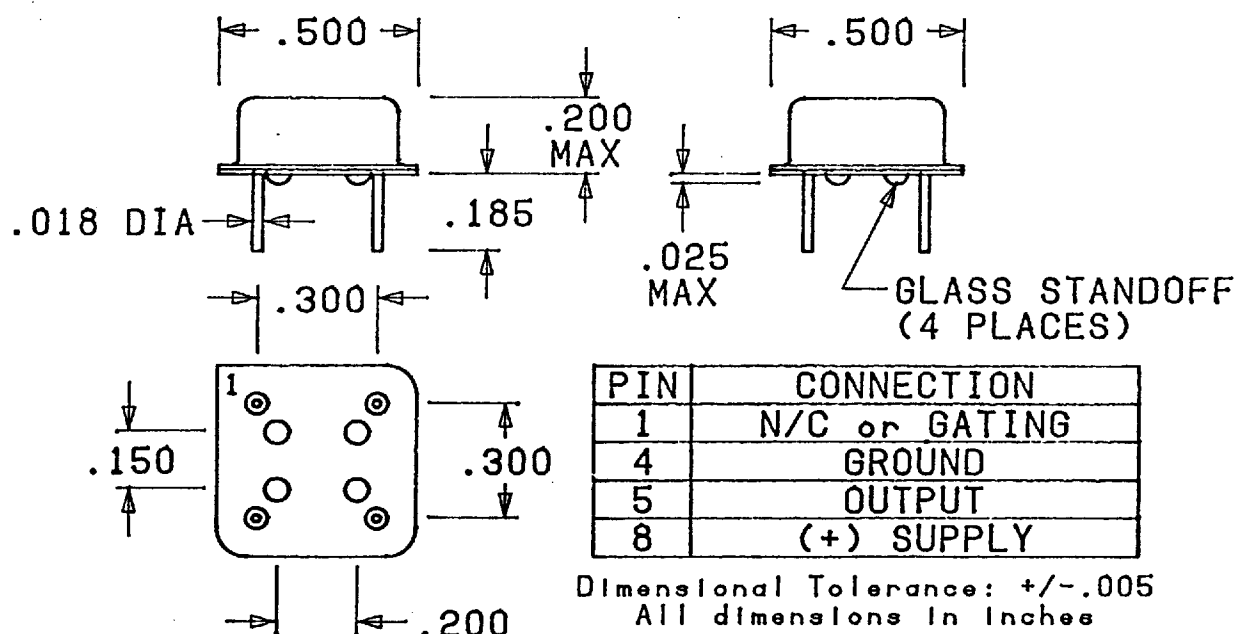

Please phone or write for additional information

6-5-91

Bulletin subject to change without notice