


# Use VDC SLIPSTREAM — Freephone 08000 747 VDC

Call this number for straightforward stock-coded orders only — there is no technical support on this number




## pre-made monitor and pc cables **4**

| Stock code | Description             |
|------------|-------------------------|
| 104-048    | VGA male — female 2m    |
| 104-222    | VGA male — female 3m    |
| 104-224    | VGA male — female 6m    |
| 104-226    | VGA male — female 10m   |
| 104-228    | VGA male — female 20m   |
| 104-230    | VGA male — female 30m   |
| 104-232    | VGA male — female 50m   |
| 104-234    | VGA male — male 2m      |
| 104-236    | VGA male — male 3m      |
| 104-238    | VGA male — male 6m      |
| 104-240    | VGA male — male 10m     |
| 104-242    | VGA male — male 20m     |
| 104-244    | VGA male — male 30m     |
| 104-246    | VGA male — male 50m     |
| 104-150    | Monitor adaptor         |
| 104-152    | 5 pin DIN extension 3m  |
| 104-154    | 5 pin DIN extension 6m  |
| 104-156    | 5 pin DIN extension 10m |
| 104-158    | PS2 extension 3m        |
| 104-160    | PS2 extension 5m        |
| 104-162    | PS2 extension 10m       |
| 104-164    | ADB extension 5m        |
| 104-166    | ADB extension 7.5m      |
| 104-168    | ADB extension 15m       |
| 104-180    | 9D extension 3m         |
| 104-182    | 9D extension 6m         |
| 104-184    | 9D extension 10m        |
| 104-186    | VGA 2 way switch        |
| 104-188    | VGA 4 way DA            |
| 104-050    | VGA — 4 x BNC 2m        |
| 104-052    | VGA — 5 x BNC 2m        |
| 104-054    | D sub male — female 2m  |
| 104-056    | D sub — 3 x BNC 2m      |
| 104-058    | D sub — 4 x BNC 2m      |

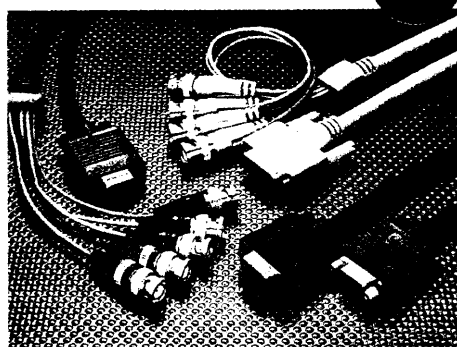


A range of high quality moulded cables manufactured using multicore video cable. Connector types are either 15 pole D sub high density types (VGA/SVGA) or standard 15 pole D sub types.

manufacturing pre-made data cables



| Stock code | Length |
|------------|--------|
| 104-060    | 0.5m   |
| 104-062    | 1m     |
| 104-064    | 2m     |
| 104-066    | 3m     |
| 104-068    | 5m     |
| 104-070    | 10m    |
| 104-072    | 15m    |
| 104-074    | 20m    |

## RS422 remote cables **5**

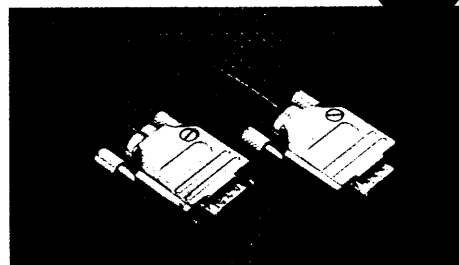

9 pole D sub male to male wired using 2 pair individually screened low capacitance cable. Industry standard for remotes and machine control. The low capacitance cable allows long lengths to be run without problems.