

MOS INTEGRATED CIRCUIT

μ PD42S16165, 4216165

**16 M-BIT DYNAMIC RAM
1 M-WORD BY 16-BIT, EDO,
BYTE READ/WRITE MODE**

Description

The μ PD42S16165, 4216165 are 1,048,576 words by 16 bits CMOS dynamic RAMs with optional EDO.

EDO is a kind of the page mode and is useful for the read operation.

Besides, the μ PD42S16165 can execute $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh.

The μ PD42S16165, 4216165 are packaged in 50-pin plastic TSOP (II) and 42-pin plastic SOJ.

Features

- EDO (Hyper page mode)
- 1,048,576 words by 16 bits organization
- Single +5.0 V ± 10 % power supply
- Fast access and cycle time

Part number	Power consumption Active (MAX.)	Access time (MAX.)	R/W cycle time (MIN.)	EDO (Hyper page mode) cycle time (MIN.)
μ PD42S16165-50, 4216165-50	660 mW	50 ns	84 ns	20 ns
μ PD42S16165-60, 4216165-60	605 mW	60 ns	104 ns	25 ns
μ PD42S16165-70, 4216165-70	550 mW	70 ns	124 ns	30 ns

- The μ PD42S16165 can execute $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh

Part number	Refresh cycle	Refresh	Power consumption at standby (MAX.)
μ PD42S16165	4,096 cycles / 128 ms	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ only refresh, Hidden refresh	1.38 mW (CMOS level input)
μ PD4216165	4,096 cycles / 64 ms	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ only refresh, Hidden refresh	5.5 mW (CMOS level input)


The information in this document is subject to change without notice.

Ordering Information


Part number	Access time (MAX.)	Package	Refresh
μ PD42S16165G5-50-7JF	50 ns	50-pin plastic TSOP (II) (400 mil)	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh $\overline{\text{RAS}}$ only refresh Hidden refresh
μ PD42S16165G5-60-7JF	60 ns		
μ PD42S16165G5-70-7JF	70 ns		
μ PD42S16165LE-50	50 ns	42-pin plastic SOJ (400 mil)	
μ PD42S16165LE-60	60 ns		
μ PD42S16165LE-70	70 ns		
μ PD4216165G5-50-7JF	50 ns	50-pin plastic TSOP (II) (400 mil)	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh $\overline{\text{RAS}}$ only refresh Hidden refresh
μ PD4216165G5-60-7JF	60 ns		
μ PD4216165G5-70-7JF	70 ns		
μ PD4216165LE-50	50 ns	42-pin plastic SOJ (400 mil)	
μ PD4216165LE-60	60 ns		
μ PD4216165LE-70	70 ns		

Pin Configurations (Marking Side)

50-pin Plastic TSOP (II) (400 mil)

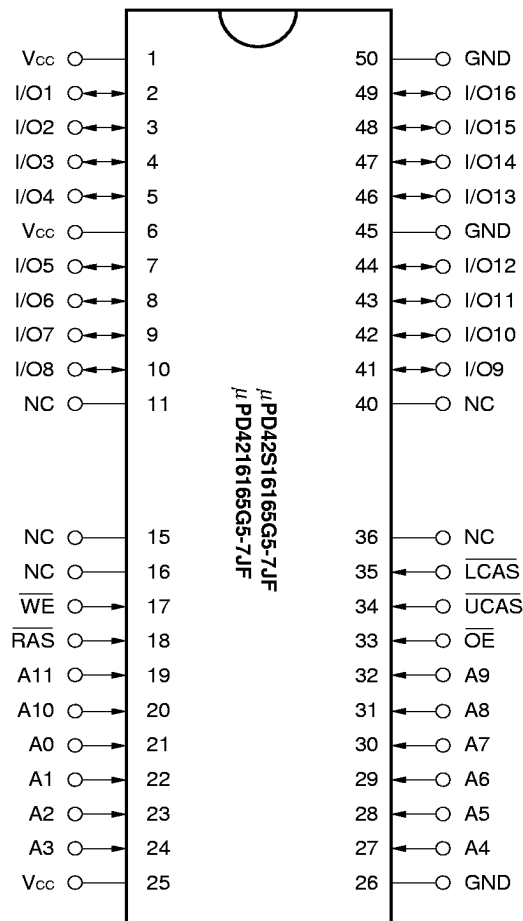


42-pin Plastic SOJ (400 mil)

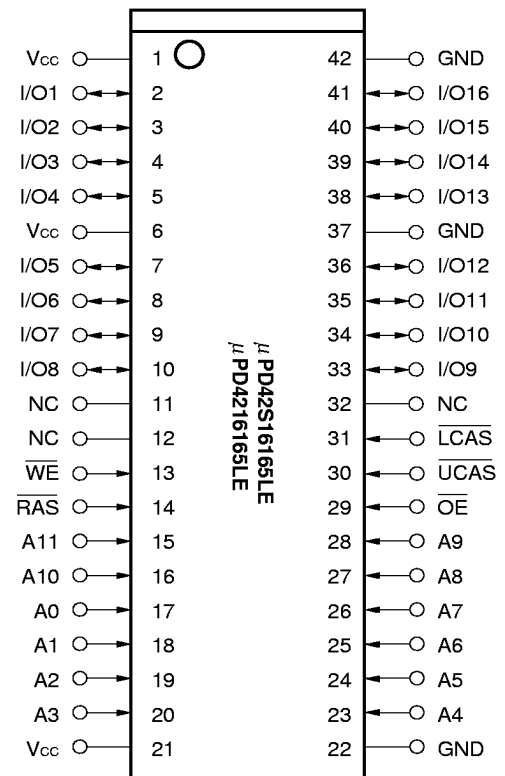

- A0 to A11 : Address Inputs
- I/O1 to I/O16 : Data Inputs/Outputs
- $\overline{\text{RAS}}$: Row Address Strobe
- $\overline{\text{UCAS}}$: Column Address Strobe (upper)
- $\overline{\text{LCAS}}$: Column Address Strobe (lower)
- $\overline{\text{WE}}$: Write Enable
- $\overline{\text{OE}}$: Output Enable
- Vcc : Power Supply
- GND : Ground
- NC : No Connection

Block Diagram

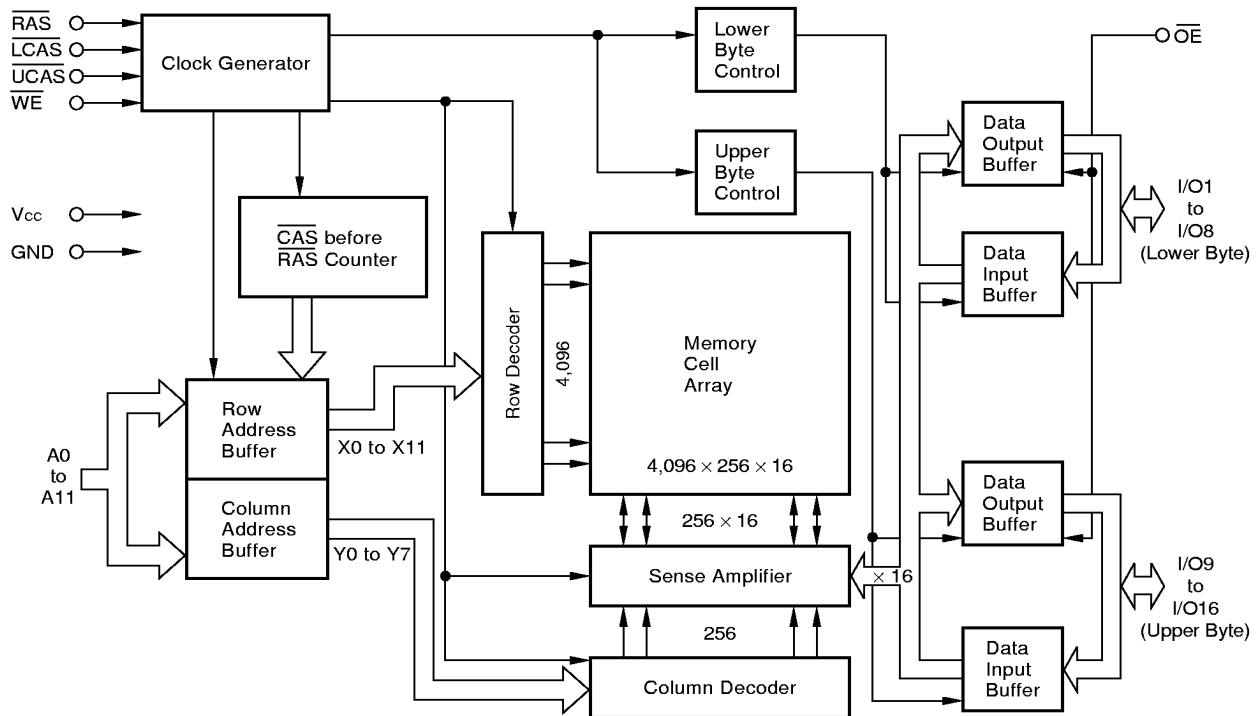

Input/Output Pin Functions

The μ PD42S16165, 4216165 have input pins $\overline{RAS}$, $\overline{CAS}$ ^{Note}, $\overline{WE}$, $\overline{OE}$, A0 to A11 and input/output pins I/O1 to I/O16.

Pin name	Input/Output	Function
$\overline{RAS}$ (Row address strobe)	Input	$\overline{RAS}$ activates the sense amplifier by latching a row address and selecting a corresponding word line. It refreshes memory cell array of one line selected by the row address. It also selects the following function. • $\overline{CAS}$ before $\overline{RAS}$ refresh
$\overline{CAS}$ (Column address strobe)		$\overline{CAS}$ activates data input/output circuit by latching column address and selecting a digit line connected with the sense amplifier.
A0 to A11 (Address inputs)		Address bus. Input total 20-bit of address signal, upper 12-bit and lower 8-bit in sequence (address multiplex method). Therefore, one word is selected from 1,048,576-word by 16-bit memory cell array. In actual operation, latch row address by specifying row address and activating $\overline{RAS}$. Then, switch the address bus to column address and activate $\overline{CAS}$. Each address is taken into the device when $\overline{RAS}$ and $\overline{CAS}$ are activated. Therefore, the address input setup time (t_{ASR} , t_{ASC}) and hold time (t_{RAH} , t_{CAH}) are specified for the activation of $\overline{RAS}$ and $\overline{CAS}$.
$\overline{WE}$ (Write enable)		Write control signal. Write operation is executed by activating $\overline{RAS}$, $\overline{CAS}$ and $\overline{WE}$.
$\overline{OE}$ (Output enable)		Read control signal. Read operation can be executed by activating $\overline{RAS}$, $\overline{CAS}$ and $\overline{OE}$. If $\overline{WE}$ is activated during read operation, $\overline{OE}$ is to be ineffective in the device. Therefore, read operation cannot be executed.
I/O1 to I/O16 (Data inputs/outputs)	Input/Output	16-bit data bus. I/O1 to I/O16 are used to input/output data.

Note $\overline{CAS}$ means $\overline{UCAS}$ and $\overline{LCAS}$.

Cautions when using the hyper page mode (EDO)

1. $\overline{\text{CAS}}$ access should be used to operate t_{HPC} at the MIN. value.
2. To make I/Os to Hi-Z in read cycle, it is necessary to control $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$ as follows. The effective specification depends on the state of each signal.
 - (1) Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are inactive (at the end of read cycle)

$\overline{\text{WE}}$: inactive, $\overline{\text{OE}}$: active

t_{OFC} is effective when $\overline{\text{RAS}}$ is inactivated before $\overline{\text{CAS}}$ is inactivated.

t_{OFR} is effective when $\overline{\text{CAS}}$ is inactivated before $\overline{\text{RAS}}$ is inactivated.

The slower of t_{OFC} and t_{OFR} becomes effective.
 - (2) Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are active or either $\overline{\text{RAS}}$ or $\overline{\text{CAS}}$ is active (in read cycle)

$\overline{\text{WE}}$, $\overline{\text{OE}}$: inactive t_{OEZ} is effective.

Both $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are inactive or $\overline{\text{RAS}}$ is active and $\overline{\text{CAS}}$ is inactive (at the end of read cycle)

$\overline{\text{WE}}$, $\overline{\text{OE}}$: active and either t_{RRH} or t_{RCH} must be met t_{WEZ} and t_{WPZ} are effective.

The faster of t_{OEZ} and t_{WEZ} becomes effective.

The faster of (1) and (2) becomes effective.
3. In read cycle, the effective specification depends on the state of $\overline{\text{CAS}}$ signal when controlling data output with the $\overline{\text{OE}}$ signal.
 - (1) $\overline{\text{CAS}}$: inactive, $\overline{\text{OE}}$: active t_{CHO} is effective.
 - (2) $\overline{\text{CAS}}$, $\overline{\text{OE}}$: active t_{OCH} is effective.

Electrical Specifications

- $\overline{\text{CAS}}$ means $\overline{\text{UCAS}}$ and $\overline{\text{LCAS}}$.
- All voltages are referenced to GND.
- After power up ($V_{CC} \geq V_{CC(MIN.)}$), wait more than 100 μs ($\overline{\text{RAS}}$, $\overline{\text{CAS}}$ inactive) and then, execute eight $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ or $\overline{\text{RAS}}$ only refresh cycles as dummy cycles to initialize internal circuit.

Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Voltage on any pin relative to GND	V_T		-1.0 to +7.0	V
Supply voltage	V_{CC}		-1.0 to +7.0	V
Output current	I_O		50	mA
Power dissipation	P_D		1	W
Operating ambient temperature	T_A		0 to +70	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-55 to +125	$^{\circ}\text{C}$

Caution Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply voltage	V_{CC}		4.5	5.0	5.5	V
High level input voltage	V_{IH}		2.4		$V_{CC} + 1.0$	V
Low level input voltage	V_{IL}		-1.0		+0.8	V
Operating ambient temperature	T_A		0		70	$^{\circ}\text{C}$

Capacitance ($T_A = 25^{\circ}\text{C}$, $f = 1\text{ MHz}$)

Parameter	Symbol	Test condition	MIN.	TYP.	MAX.	Unit
Input capacitance	C_{I1}	Address			5	pF
	C_{I2}	$\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$			7	
Data input/output capacitance	$C_{I/O}$	I/O			7	pF

DC Characteristics (Recommended operating conditions unless otherwise noted)


Parameter		Symbol	Test condition	MIN.	MAX.	Unit	Notes
Operating current		I _{CC1}	$\overline{\text{RAS}}, \overline{\text{CAS}}$ cycling	t _{RAC} = 50 ns	110	mA	1, 2, 3
			t _{RC} = t _{RC (MIN.)} , I _O = 0 mA	t _{RAC} = 60 ns	100		
				t _{RAC} = 70 ns	90		
Standby current	μ PD42S16165	I _{CC2}	$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{IH (MIN.)}$, I _O = 0 mA		2.0	mA	
			$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{CC} - 0.2 \text{ V}$, I _O = 0 mA		0.25		
	μ PD4216165		$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{IH (MIN.)}$, I _O = 0 mA		2.0		
			$\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{CC} - 0.2 \text{ V}$, I _O = 0 mA		1.0		
$\overline{\text{RAS}}$ only refresh current		I _{CC3}	$\overline{\text{RAS}}$ cycling, $\overline{\text{CAS}} \geq V_{IH (MIN.)}$ t _{RC} = t _{RC (MIN.)} , I _O = 0 mA	t _{RAC} = 50 ns	110	mA	1, 2, 3, 4
				t _{RAC} = 60 ns	100		
				t _{RAC} = 70 ns	90		
Operating current (Hyper page mode (EDO))		I _{CC4}	$\overline{\text{RAS}} \leq V_{IL (MAX.)}$, $\overline{\text{CAS}}$ cycling t _{HPC} = t _{HPC (MIN.)} , I _O = 0 mA	t _{RAC} = 50 ns	120	mA	1, 2, 5
				t _{RAC} = 60 ns	110		
				t _{RAC} = 70 ns	100		
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh current		I _{CC5}	$\overline{\text{RAS}}$ cycling t _{RC} = t _{RC (MIN.)} , I _O = 0 mA	t _{RAC} = 50 ns	110	mA	1, 2
				t _{RAC} = 60 ns	100		
				t _{RAC} = 70 ns	90		
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh current (4,096 cycles / 128 ms, only for the μ PD42S16165)		I _{CC6}	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh : t _{RC} = 31.3 μ s $\overline{\text{RAS}}, \overline{\text{CAS}}$: $V_{CC} - 0.2 \text{ V} \leq V_{IH} \leq V_{IH (MAX.)}$ $0 \text{ V} \leq V_{IL} \leq 0.2 \text{ V}$ Standby: $\overline{\text{RAS}}, \overline{\text{CAS}} \geq V_{CC} - 0.2 \text{ V}$ Address: V_{IH} or V_{IL} $\overline{\text{WE}}, \overline{\text{OE}}$: V_{IH} I _O = 0 mA	t _{RAS} ≤ 300 ns	450	μ A	1, 2
				t _{RAS} ≤ 1 μ s	600	μ A	1, 2
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh current (only for the μ PD42S16165)		I _{CC7}	$\overline{\text{RAS}}, \overline{\text{CAS}}$: t _{RASS} = 5 ms $V_{CC} - 0.2 \text{ V} \leq V_{IH} \leq V_{IH (MAX.)}$ $0 \text{ V} \leq V_{IL} \leq 0.2 \text{ V}$ I _O = 0 mA		250	μ A	2
Input leakage current		I _{I (L)}	V _I = 0 to 5.5 V All other pins not under test = 0 V	-10	+10	μ A	
Output leakage current		I _{O (L)}	V _O = 0 to 5.5 V Output is disabled (Hi-Z)	-10	+10	μ A	
High level output voltage		V _{OH}	I _O = -5.0 mA	2.4		V	
Low level output voltage		V _{OL}	I _O = +4.2 mA		0.4	V	

- Notes**
1. I_{CC1}, I_{CC3}, I_{CC4}, I_{CC5} and I_{CC6} depend on cycle rates (t_{RC} and t_{HPC}).
 2. Specified values are obtained with outputs unloaded.
 3. I_{CC1} and I_{CC3} are measured assuming that address can be changed once or less during $\overline{\text{RAS}} \leq V_{IL (MAX.)}$ and $\overline{\text{CAS}} \geq V_{IH (MIN.)}$.
 4. I_{CC3} is measured assuming that all column address inputs are held at either high or low.
 5. I_{CC4} is measured assuming that all column address inputs are switched only once during each hyper page (EDO) cycle.

AC Characteristics (Recommended Operating Conditions unless otherwise noted)


AC Characteristics Test Conditions

(1) Input timing specification

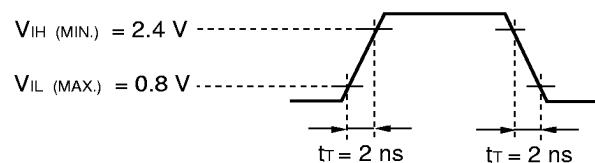


★ (2) Output timing specification


- μ PD42S16165-50, 4216165-50



- μ PD42S16165-60, 4216165-60
- μ PD42S16165-70, 4216165-70



(3) Output loading condition



Common to Read, Write, Read Modify Write Cycle

Parameter		Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Notes
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read / Write cycle time		t _{RC}	84	–	104	–	124	–	ns	
$\overline{\text{RAS}}$ precharge time		t _{RP}	30	–	40	–	50	–	ns	
$\overline{\text{CAS}}$ precharge time		t _{CPN}	8	–	10	–	10	–	ns	
$\overline{\text{RAS}}$ pulse width		t _{RAS}	50	10,000	60	10,000	70	10,000	ns	1
$\overline{\text{CAS}}$ pulse width		t _{CAS}	8	10,000	10	10,000	12	10,000	ns	
$\overline{\text{RAS}}$ hold time		t _{RSH}	10	–	10	–	12	–	ns	
$\overline{\text{CAS}}$ hold time		t _{CSH}	38	–	40	–	50	–	ns	
$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ delay time		t _{RCD}	11	37	14	45	14	52	ns	2
$\overline{\text{RAS}}$ to column address delay time		t _{RAD}	9	25	12	30	12	35	ns	2
$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ precharge time		t _{CRP}	5	–	5	–	5	–	ns	3
Row address setup time		t _{ASR}	0	–	0	–	0	–	ns	
Row address hold time		t _{RAH}	7	–	10	–	10	–	ns	
Column address setup time		t _{ASC}	0	–	0	–	0	–	ns	
Column address hold time		t _{CAH}	7	–	10	–	12	–	ns	
$\overline{\text{OE}}$ lead time referenced to $\overline{\text{RAS}}$		t _{OES}	0	–	0	–	0	–	ns	
$\overline{\text{CAS}}$ to data setup time		t _{CLZ}	0	–	0	–	0	–	ns	
$\overline{\text{OE}}$ to data setup time		t _{OLZ}	0	–	0	–	0	–	ns	
$\overline{\text{OE}}$ to data delay time		t _{OED}	10	–	13	–	15	–	ns	
Masked byte write hold time referenced to $\overline{\text{RAS}}$		t _{MRH}	0	–	0	–	0	–	ns	
Transition time (rise and fall)		t _{tr}	1	50	1	50	1	50	ns	
Refresh time	μPD42S16165	t _{REF}	–	128	–	128	–	128	ms	4
	μPD4216165		–	64	–	64	–	64	ms	

Notes 1. In $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles, $t_{\text{RAS}}(\text{MAX.})$ is 100 μs .

If 10 $\mu\text{s} < t_{\text{RAS}} < 100 \mu\text{s}$, $\overline{\text{RAS}}$ precharge time for $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh (t_{RPS}) is applied.

2. For read cycles, access time is defined as follows:

Input conditions	Access time	Access time from $\overline{\text{RAS}}$
$t_{\text{RAD}} \leq t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}} \leq t_{\text{RCD}}(\text{MAX.})$	$t_{\text{RAC}}(\text{MAX.})$	$t_{\text{RAC}}(\text{MAX.})$
$t_{\text{RAD}} > t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}} \leq t_{\text{RCD}}(\text{MAX.})$	$t_{\text{AA}}(\text{MAX.})$	$t_{\text{RAD}} + t_{\text{AA}}(\text{MAX.})$
$t_{\text{RCD}} > t_{\text{RCD}}(\text{MAX.})$	$t_{\text{CAC}}(\text{MAX.})$	$t_{\text{RCD}} + t_{\text{CAC}}(\text{MAX.})$

$t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}}(\text{MAX.})$ are specified as reference points only ; they are not restrictive operating parameters. They are used to determine which access time (t_{RAC} , t_{AA} or t_{CAC}) is to be used for finding out when output data will be available. Therefore, the input conditions $t_{\text{RAD}} \geq t_{\text{RAD}}(\text{MAX.})$ and $t_{\text{RCD}} \geq t_{\text{RCD}}(\text{MAX.})$ will not cause any operation problems.

3. $t_{\text{CRP}}(\text{MIN.})$ requirement is applied to $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ cycles.

4. This specification is applied only to the $\mu\text{PD42S16165}$.

Read Cycle

Parameter	Symbol	$t_{RAC} = 50 \text{ ns}$		$t_{RAC} = 60 \text{ ns}$		$t_{RAC} = 70 \text{ ns}$		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Access time from $\overline{RAS}$	t_{RAC}	—	50	—	60	—	70	ns	1
Access time from $\overline{CAS}$	t_{CAC}	—	13	—	15	—	18	ns	1
Access time from column address	t_{AA}	—	25	—	30	—	35	ns	1
Access time from $\overline{OE}$	t_{OEA}	—	13	—	15	—	18	ns	
Column address lead time referenced to $\overline{RAS}$	t_{RAL}	25	—	30	—	35	—	ns	
Read command setup time	t_{RCS}	0	—	0	—	0	—	ns	
Read command hold time referenced to $\overline{RAS}$	t_{RRH}	0	—	0	—	0	—	ns	2
Read command hold time referenced to $\overline{CAS}$	t_{RCH}	0	—	0	—	0	—	ns	2
Output buffer turn-off delay time from $\overline{OE}$	t_{OEZ}	0	10	0	13	0	15	ns	3
$\overline{CAS}$ hold time to $\overline{OE}$	t_{CHO}	5	—	5	—	5	—	ns	4

Notes 1. For read cycles, access time is defined as follows:

Input conditions	Access time	Access time from $\overline{RAS}$
$t_{RAD} \leq t_{RAD}(\text{MAX.})$ and $t_{RCD} \leq t_{RCD}(\text{MAX.})$	$t_{RAC}(\text{MAX.})$	$t_{RAC}(\text{MAX.})$
$t_{RAD} > t_{RAD}(\text{MAX.})$ and $t_{RCD} \leq t_{RCD}(\text{MAX.})$	$t_{AA}(\text{MAX.})$	$t_{RAD} + t_{AA}(\text{MAX.})$
$t_{RCD} > t_{RCD}(\text{MAX.})$	$t_{CAC}(\text{MAX.})$	$t_{RCD} + t_{CAC}(\text{MAX.})$

$t_{RAD}(\text{MAX.})$ and $t_{RCD}(\text{MAX.})$ are specified as reference points only; they are not restrictive operating parameters. They are used to determine which access time (t_{RAC} , t_{AA} or t_{CAC}) is to be used for finding out when output data will be available. Therefore, the input conditions $t_{RAD} \geq t_{RAD}(\text{MAX.})$ and $t_{RCD} \geq t_{RCD}(\text{MAX.})$ will not cause any operation problems.

2. Either $t_{RCH}(\text{MIN.})$ or $t_{RRH}(\text{MIN.})$ should be met in read cycles.
3. $t_{OEZ}(\text{MAX.})$ defines the time when the output achieves the condition of Hi-Z and is not referenced to V_{OH} or V_{OL} .
4. $\overline{WE}$: inactive (in read cycle)
 $\overline{CAS}$: inactive, $\overline{OE}$: active t_{CHO} is effective.
 $\overline{CAS}$, $\overline{OE}$: active t_{OCH} is effective.

Write Cycle

Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
$\overline{WE}$ hold time referenced to $\overline{CAS}$	t _{WCH}	7	—	10	—	10	—	ns	1
$\overline{WE}$ pulse width	t _{WP}	8	—	10	—	10	—	ns	1
$\overline{WE}$ lead time referenced to $\overline{RAS}$	t _{RWL}	10	—	10	—	12	—	ns	
$\overline{WE}$ lead time referenced to $\overline{CAS}$	t _{CWL}	8	—	10	—	12	—	ns	
$\overline{WE}$ setup time	t _{WCS}	0	—	0	—	0	—	ns	2
$\overline{OE}$ hold time	t _{OEH}	0	—	0	—	0	—	ns	
Data-in setup time	t _{DS}	0	—	0	—	0	—	ns	3
Data-in hold time	t _{DH}	7	—	10	—	10	—	ns	3

- Notes**
1. t_{WP} (MIN.) is applied to late write cycles or read modify write cycles. In early write cycles, t_{WCH} (MIN.) should be met.
 2. If t_{WCS} ≥ t_{WCS} (MIN.), the cycle is an early write cycle and the data out will remain Hi-Z through the entire cycle.
 3. t_{DS} (MIN.) and t_{DH} (MIN.) are referenced to the $\overline{CAS}$ falling edge in early write cycles. In late write cycles and read modify write cycles, they are referenced to the $\overline{WE}$ falling edge.

Read Modify Write Cycle

Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read modify write cycle time	t _{RWC}	107	—	133	—	157	—	ns	
$\overline{RAS}$ to $\overline{WE}$ delay time	t _{RWD}	64	—	77	—	89	—	ns	1
$\overline{CAS}$ to $\overline{WE}$ delay time	t _{CWD}	27	—	32	—	37	—	ns	1
Column address to $\overline{WE}$ delay time	t _{AWD}	39	—	47	—	54	—	ns	1

- Note**
1. If t_{WCS} ≥ t_{WCS} (MIN.), the cycle is an early write cycle and the data out will remain Hi-Z through the entire cycle. If t_{RWD} ≥ t_{RWD} (MIN.), t_{CWD} ≥ t_{CWD} (MIN.), t_{AWD} ≥ t_{AWD} (MIN.) and t_{CPWD} ≥ t_{CPWD} (MIN.), the cycle is a read modify write cycle and the data out will contain data read from the selected cell. If neither of the above conditions is met, the state of the data out is indeterminate.

Hyper Page Mode (EDO)

Parameter	Symbol	$t_{RAC} = 50 \text{ ns}$		$t_{RAC} = 60 \text{ ns}$		$t_{RAC} = 70 \text{ ns}$		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read / Write cycle time	t_{HPC}	20	—	25	—	30	—	ns	1
$\overline{RAS}$ pulse width	t_{RASP}	50	125,000	60	125,000	70	125,000	ns	
★ $\overline{CAS}$ pulse width	t_{HCAS}	8	10,000	10	10,000	12	10,000	ns	
★ $\overline{CAS}$ precharge time	t_{CP}	8	—	10	—	10	—	ns	
Access time from $\overline{CAS}$ precharge	t_{ACP}	—	30	—	35	—	40	ns	
$\overline{CAS}$ precharge to $\overline{WE}$ delay time	t_{CPWD}	41	—	52	—	59	—	ns	2
$\overline{RAS}$ hold time from $\overline{CAS}$ precharge	t_{RHCP}	30	—	35	—	40	—	ns	
Read modify write cycle time	t_{HPRWC}	52	—	66	—	75	—	ns	
Data output hold time	t_{DHC}	5	—	5	—	5	—	ns	
$\overline{OE}$ to $\overline{CAS}$ hold time	t_{OCH}	5	—	5	—	5	—	ns	3
$\overline{OE}$ precharge time	t_{OEP}	5	—	5	—	5	—	ns	
Output buffer turn-off delay from $\overline{WE}$	t_{WEZ}	0	10	0	13	0	15	ns	4,5
★ $\overline{WE}$ pulse width	t_{WPZ}	8	—	10	—	10	—	ns	5
Output buffer turn-off delay from $\overline{RAS}$	t_{OFR}	0	10	0	13	0	15	ns	4,5
Output buffer turn-off delay from $\overline{CAS}$	t_{OFC}	0	10	0	13	0	15	ns	4,5

Notes 1. t_{HPC} (MIN.) is applied to $\overline{CAS}$ access.

2. If $t_{WCS} \geq t_{WCS}(\text{MIN.})$, the cycle is an early write cycle and the data out will remain Hi-Z through the entire cycle. If $t_{RWd} \geq t_{RWd}(\text{MIN.})$, $t_{CWD} \geq t_{CWD}(\text{MIN.})$, $t_{AWd} \geq t_{AWd}(\text{MIN.})$ and $t_{CPWD} \geq t_{CPWD}(\text{MIN.})$, the cycle is a read modify write cycle and the data out will contain data read from the selected cell. If neither of the above conditions is met, the state of the data out is indeterminate.

3. $\overline{WE}$: inactive (in read cycle)

$\overline{CAS}$: inactive, $\overline{OE}$: active t_{CHO} is effective.

$\overline{CAS}$, $\overline{OE}$: active t_{OCH} is effective.

4. $t_{OFC}(\text{MAX.})$, $t_{OFR}(\text{MAX.})$ and $t_{WEZ}(\text{MAX.})$ define the time when the output achieves the conditions of Hi-Z and is not referenced to V_{OH} or V_{OL} .

5. To make I/Os to Hi-Z in read cycle, it is necessary to control $\overline{RAS}$, $\overline{CAS}$, $\overline{WE}$, $\overline{OE}$ as follows. The effective specification depends on state of each signal.

(1) Both $\overline{RAS}$ and $\overline{CAS}$ are inactive (at the end of the read cycle)

$\overline{WE}$: inactive, $\overline{OE}$: active

t_{OFC} is effective when $\overline{RAS}$ is inactivated before $\overline{CAS}$ is inactivated.

t_{OFR} is effective when $\overline{CAS}$ is inactivated before $\overline{RAS}$ is inactivated.

The slower of t_{OFC} and t_{OFR} becomes effective.

(2) Both $\overline{RAS}$ and $\overline{CAS}$ are active or either $\overline{RAS}$ or $\overline{CAS}$ is active (in read cycle)

$\overline{WE}$, $\overline{OE}$: inactive t_{OEZ} is effective.

Both $\overline{RAS}$ and $\overline{CAS}$ are inactive or $\overline{RAS}$ is active and $\overline{CAS}$ is inactive (at the end of read cycle)

$\overline{WE}$, $\overline{OE}$: active and either t_{RRH} or t_{RCH} must be met t_{WEZ} and t_{WPZ} are effective.

The faster of t_{OEZ} and t_{WEZ} becomes effective.


The faster of (1) and (2) becomes effective.

Refresh Cycle


Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
$\overline{\text{CAS}}$ setup time	t _{CSR}	5	—	5	—	5	—	ns	
$\overline{\text{CAS}}$ hold time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh)	t _{CHR}	10	—	10	—	10	—	ns	
$\overline{\text{RAS}}$ precharge $\overline{\text{CAS}}$ hold time	t _{RPC}	5	—	5	—	5	—	ns	
$\overline{\text{RAS}}$ pulse width ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh)	t _{RASS}	100	—	100	—	100	—	μs	1
$\overline{\text{RAS}}$ precharge time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh)	t _{RPS}	90	—	110	—	130	—	ns	1
$\overline{\text{CAS}}$ hold time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh)	t _{CHS}	—50	—	—50	—	—50	—	ns	1
$\overline{\text{WE}}$ hold time	t _{WHR}	15	—	15	—	15	—	ns	

Note 1. This specification is applied only to the μPD42S16165.

Read Cycle

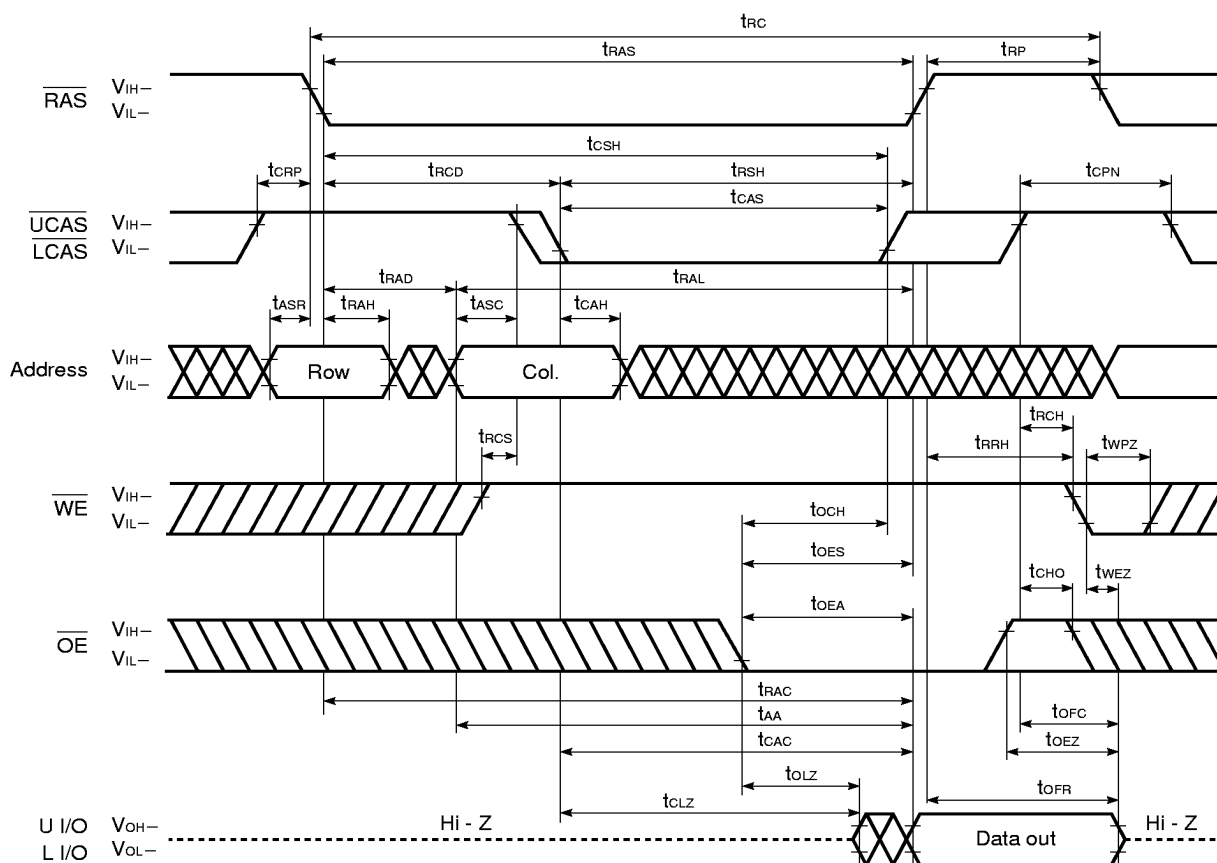


Upper Byte Read Cycle

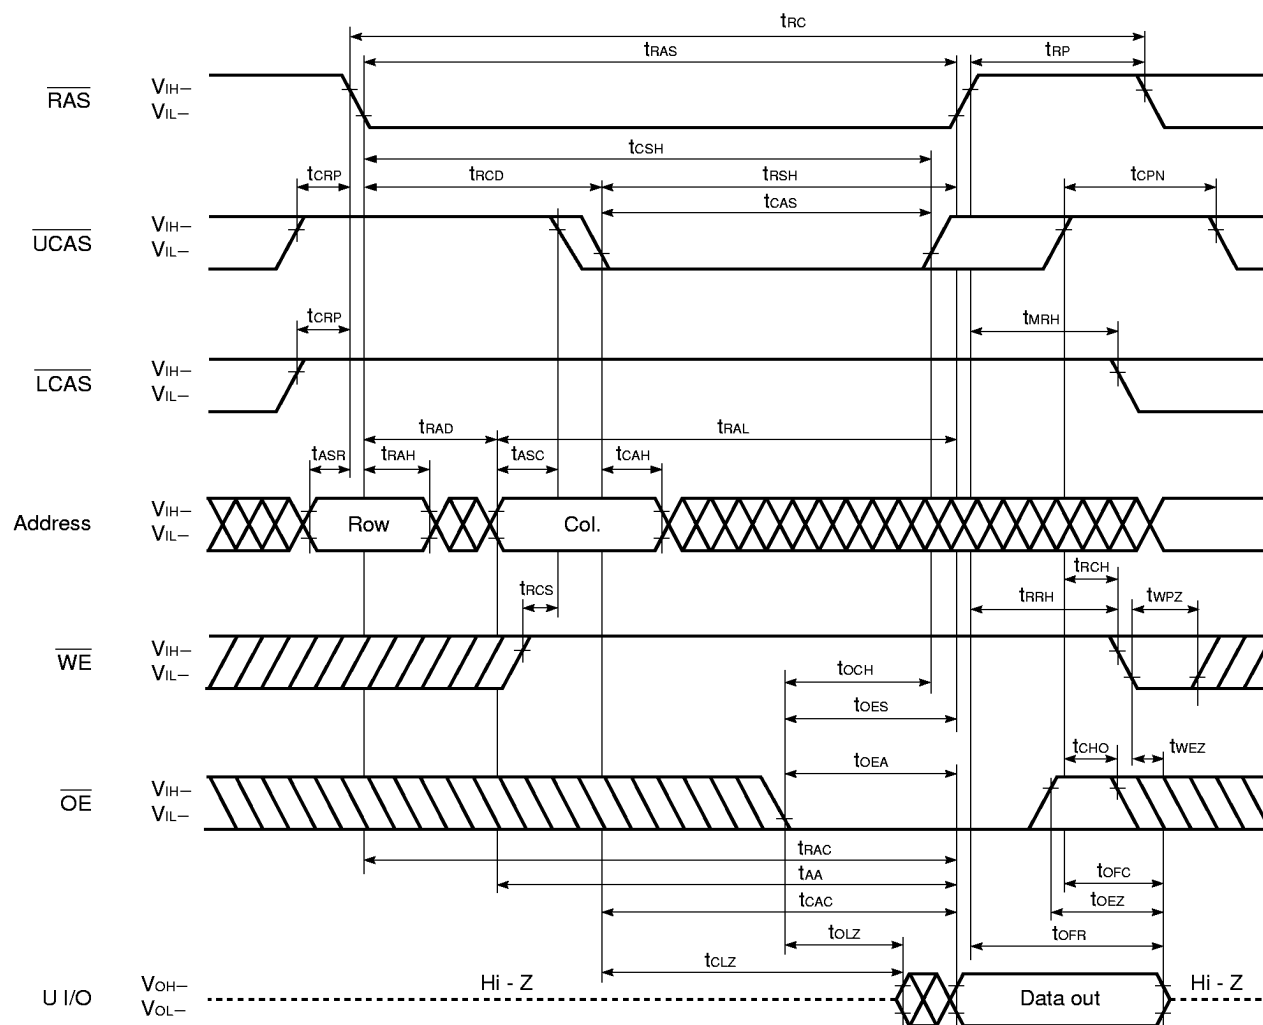


Remark L I/O: Hi-Z

Lower Byte Read Cycle

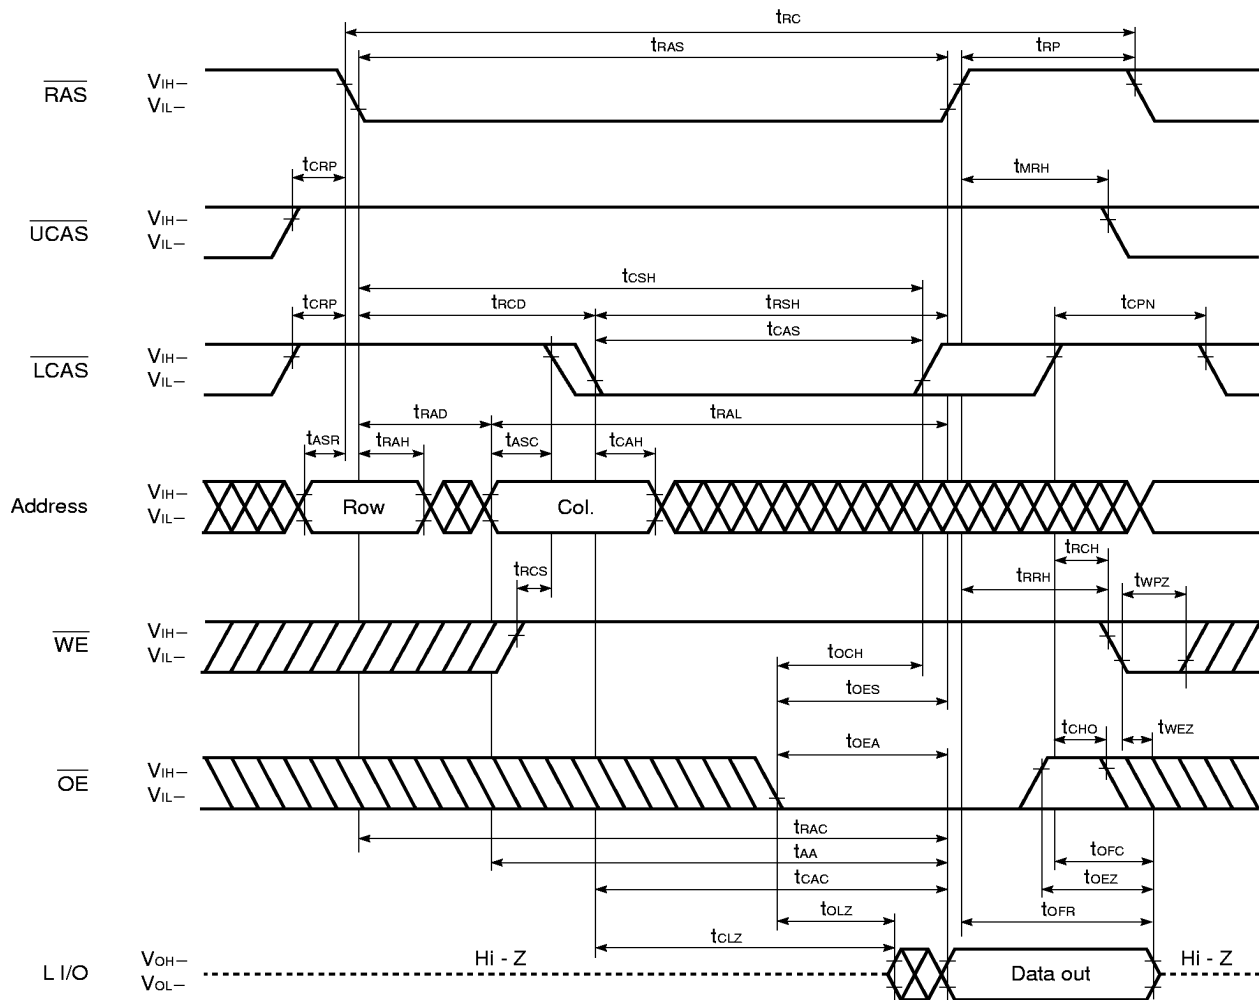


Remark U I/O: Hi-Z

Early Write Cycle

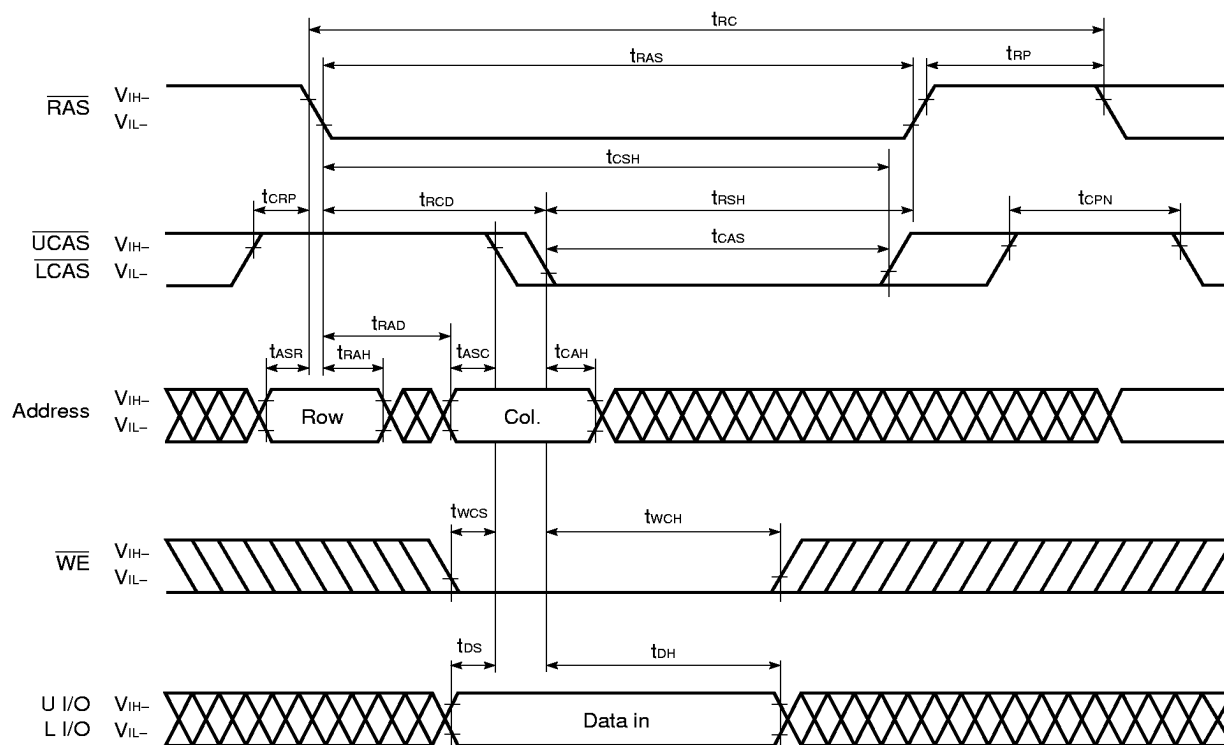


Remark $\overline{\text{OE}}$: Don't care

Upper Byte Early Write Cycle

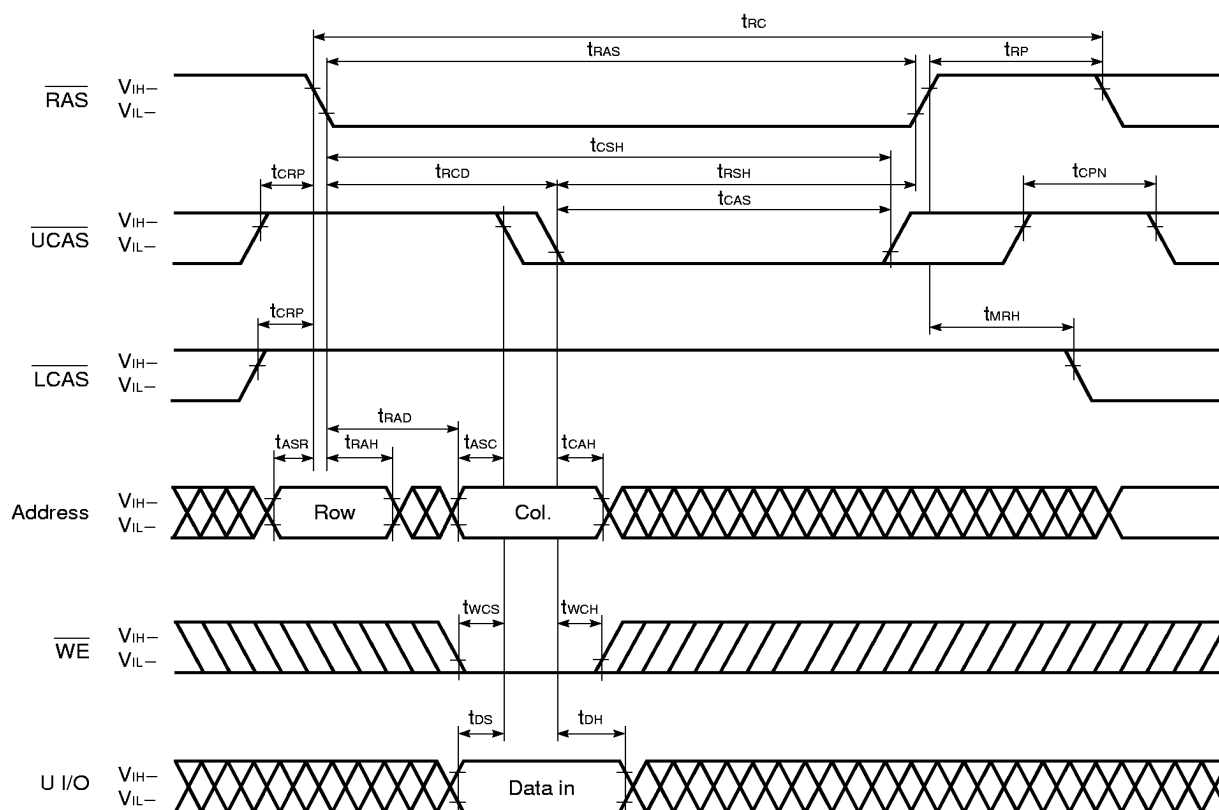


Remark $\overline{OE}$, L I/O: Don't care

Lower Byte Early Write Cycle

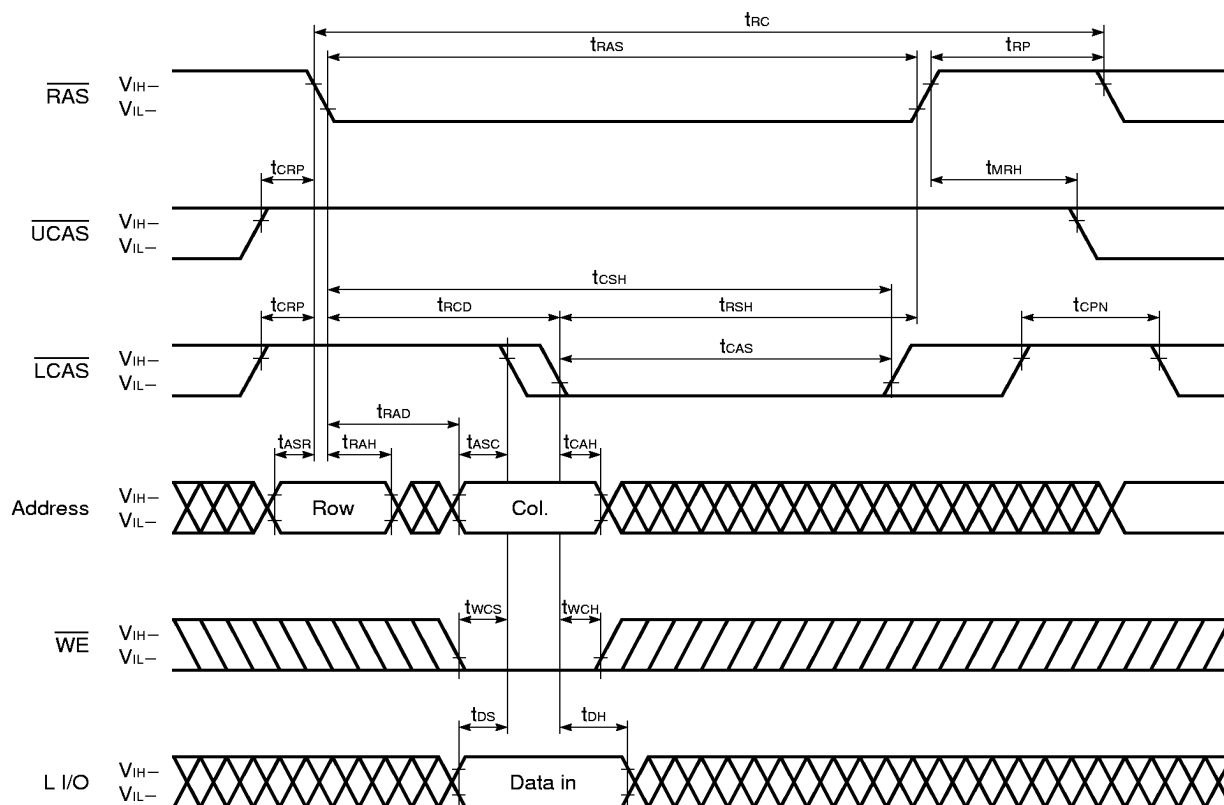


Remark $\overline{OE}$, U I/O: Don't care

Late Write Cycle

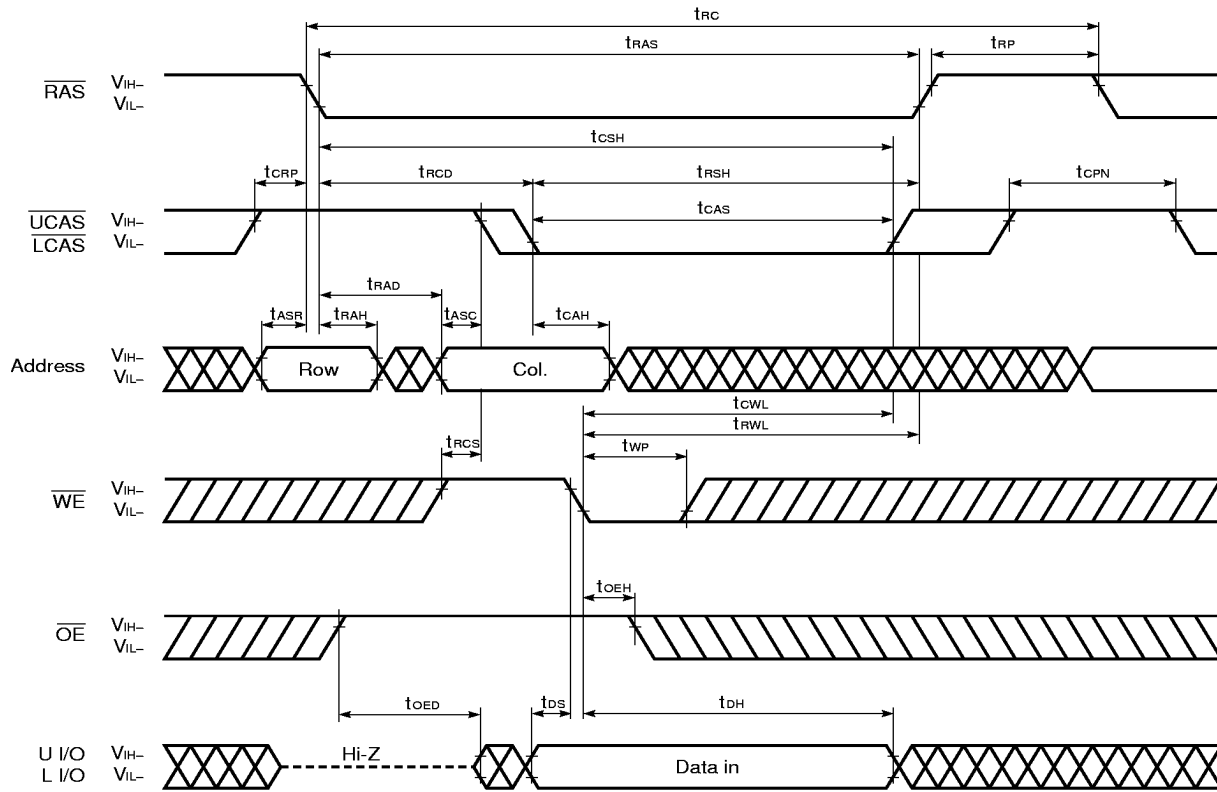


Upper Byte Late Write Cycle

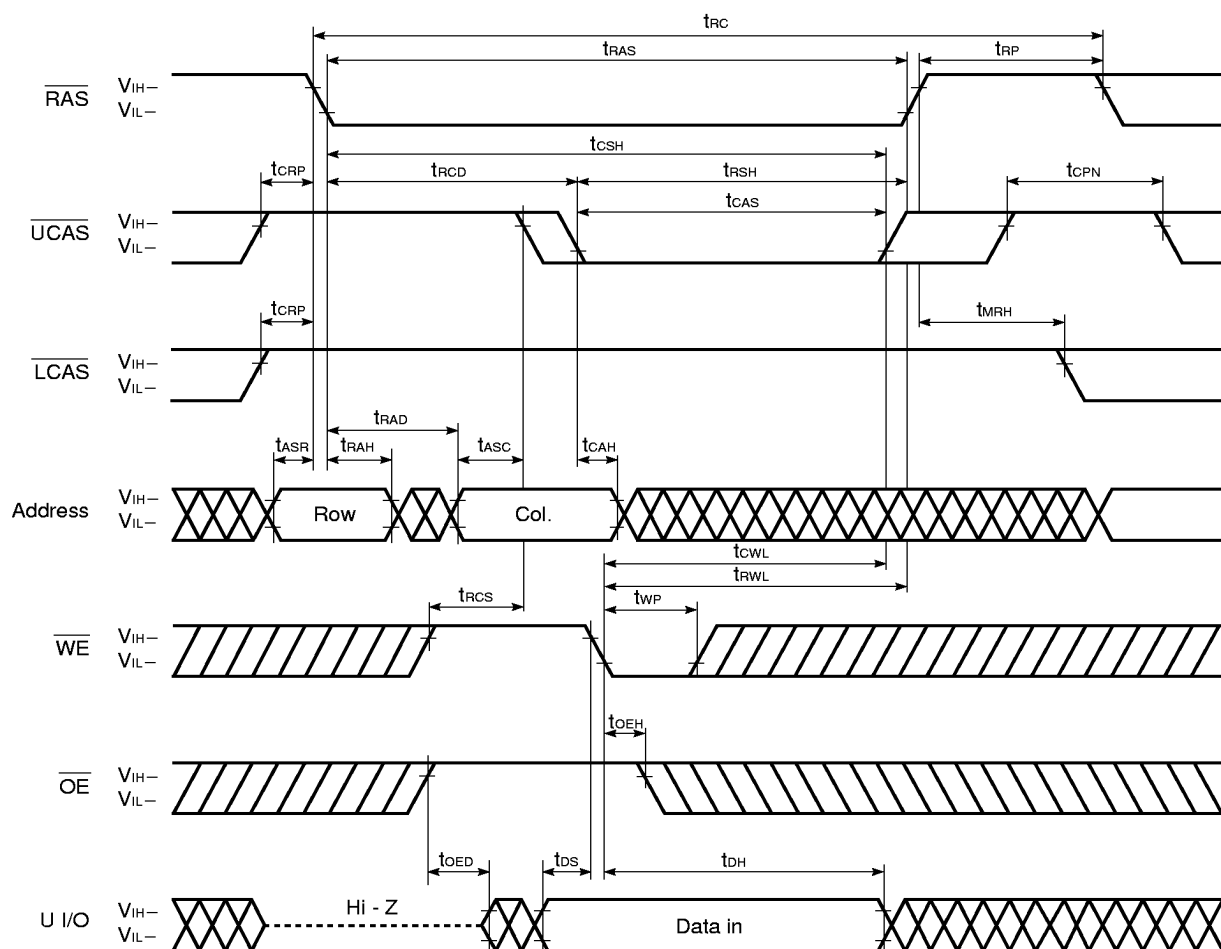


Remark L I/O: Don't care

Lower Byte Late Write Cycle

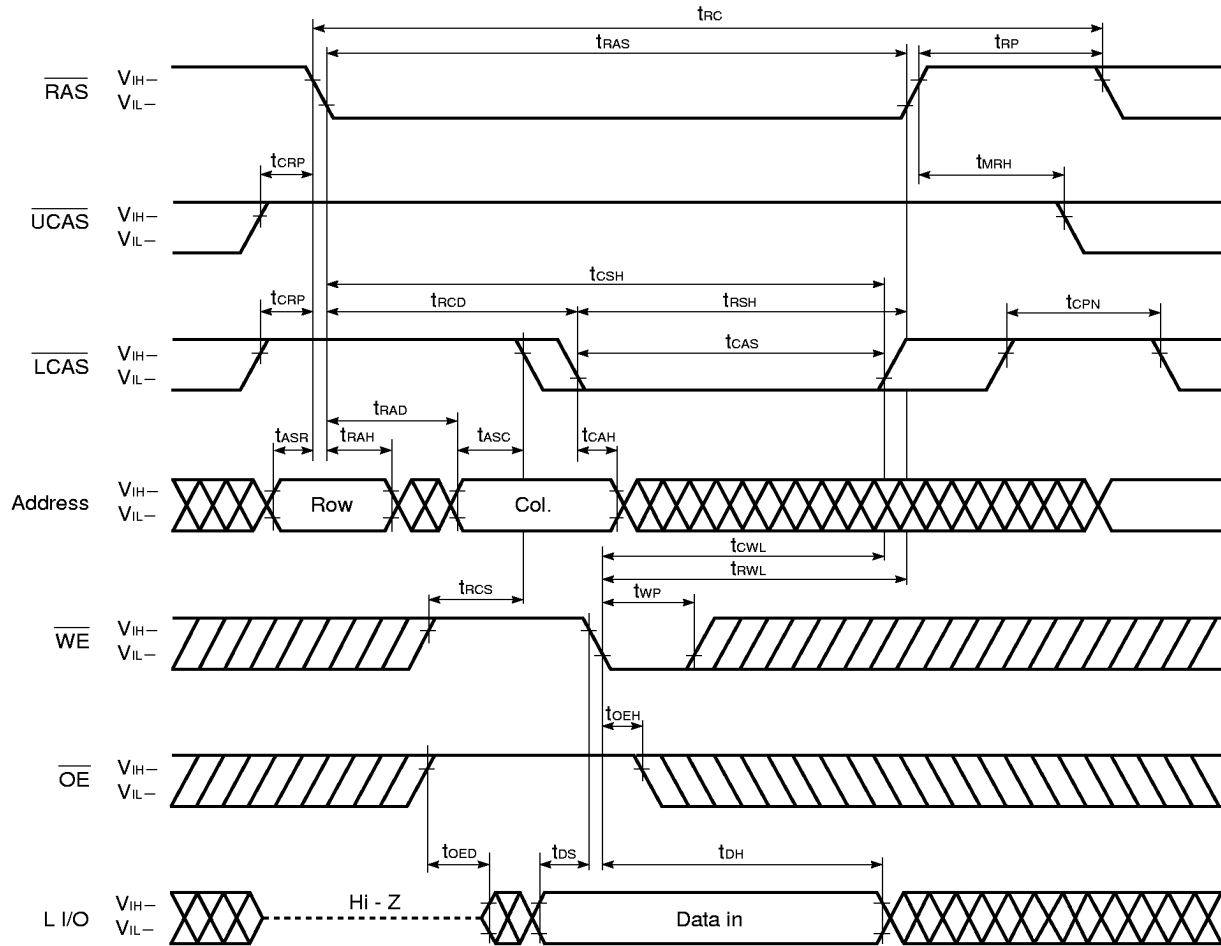


Remark U I/O: Don't care

Read Modify Write Cycle

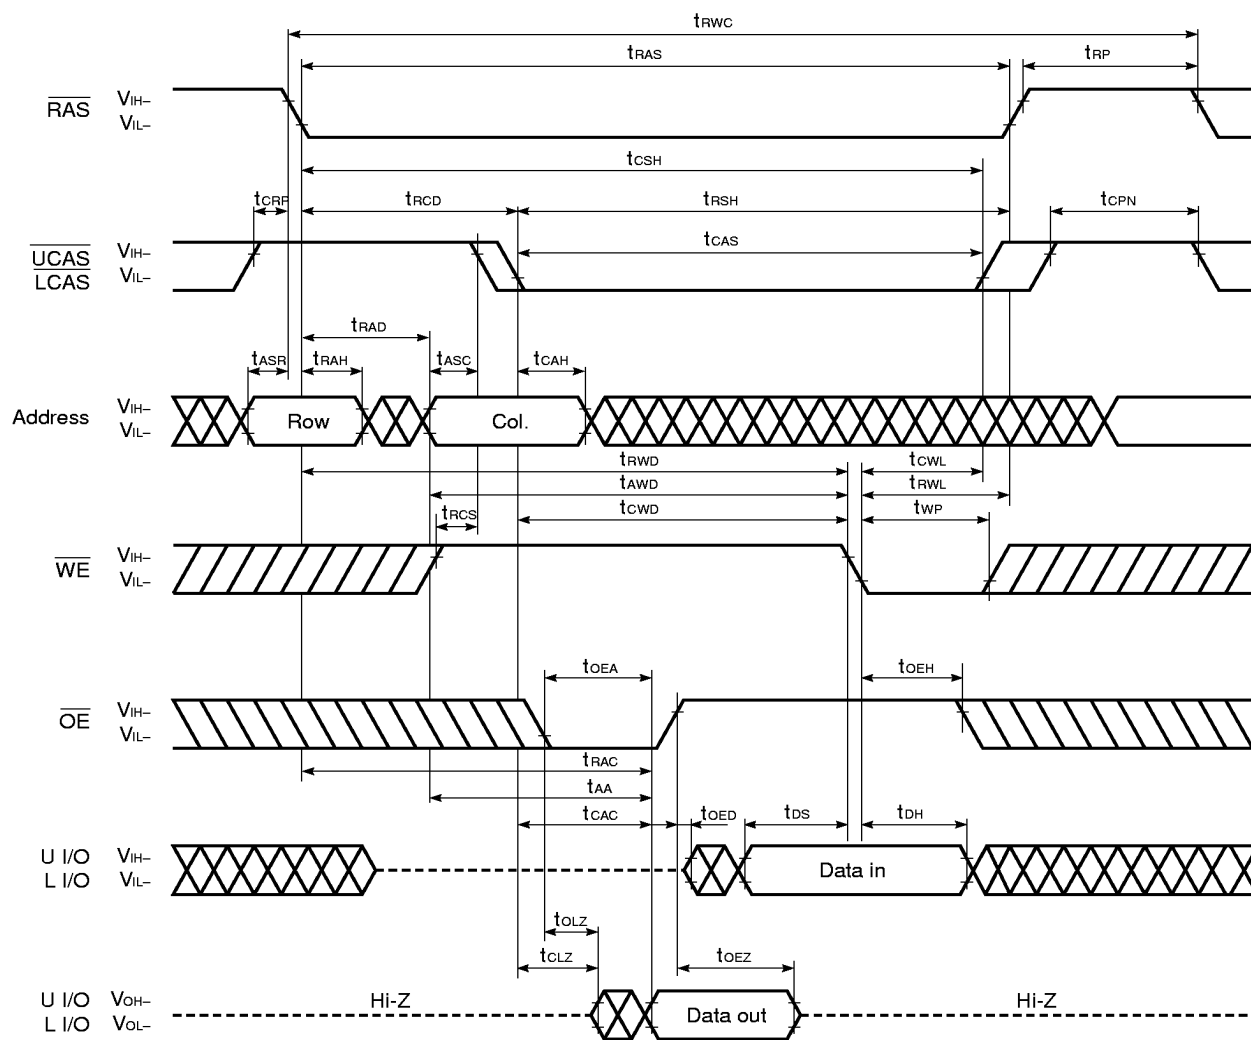

Remark In this cycle, the input data to Lower I/O is ineffective. The data out of that remains Hi-Z.

Lower Byte Read Modify Write Cycle

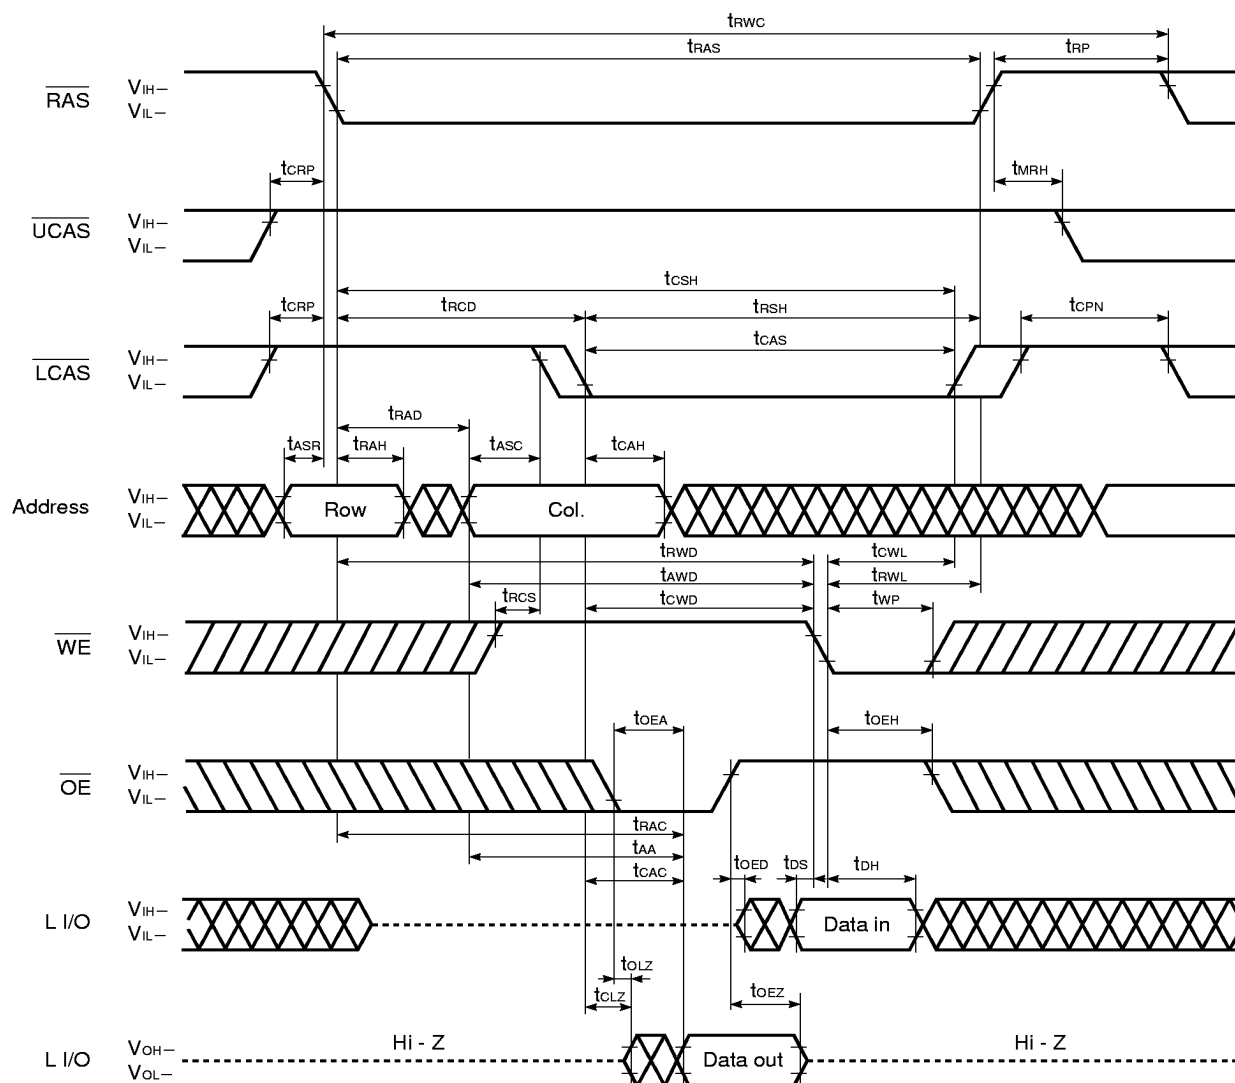


Remark In this cycle, the input data to Upper I/O is ineffective. The data out of that remains Hi-Z.

[illegible]

28

Hyper Page Mode (EDO) Byte Read Cycle

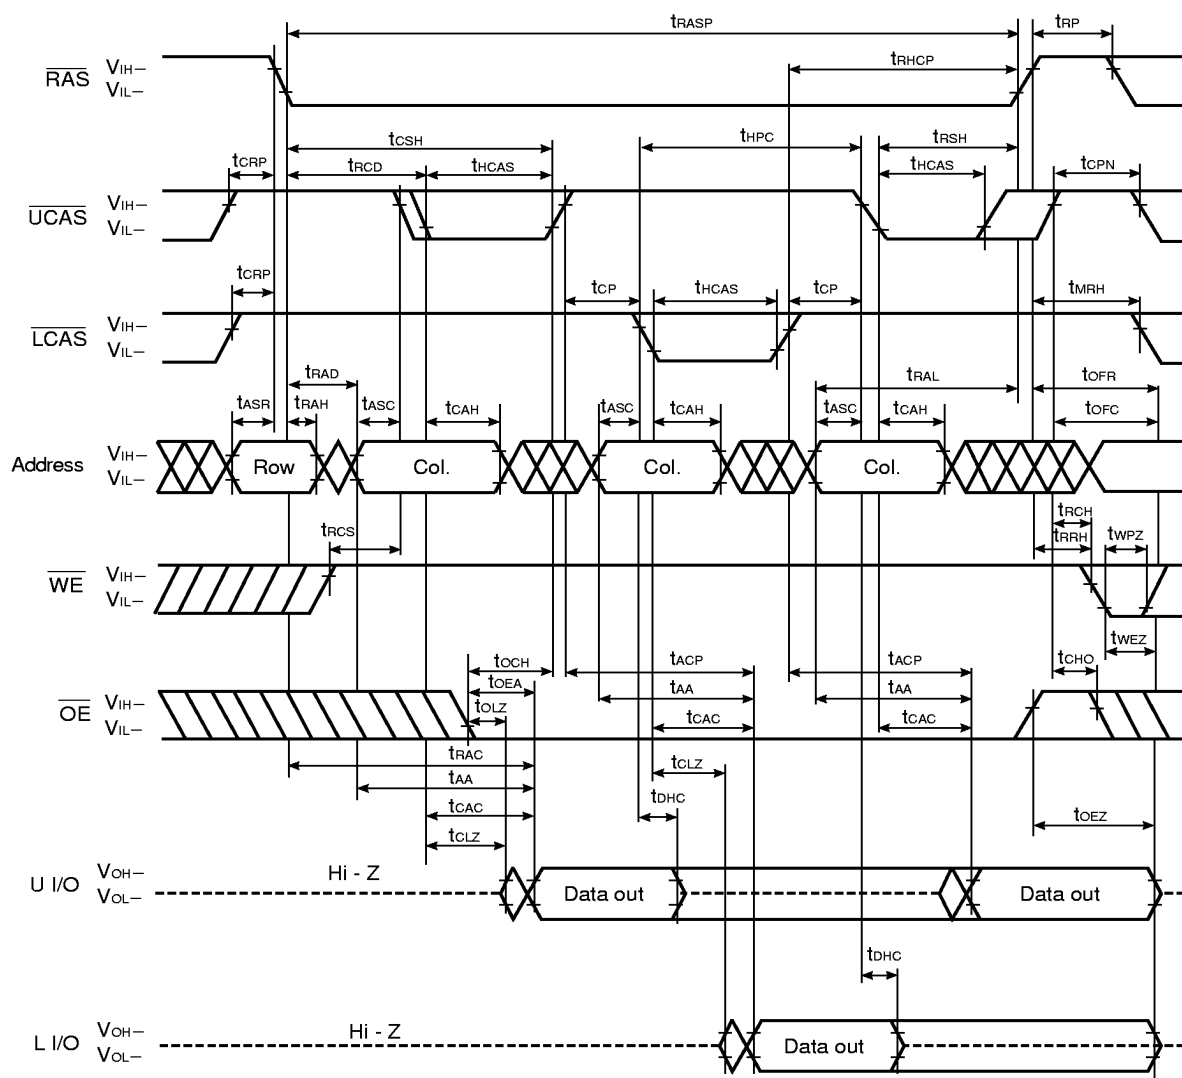

- Remarks**
1. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.
 2. This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.

The timing diagram illustrates the relationship between several control and data signals over time. The signals shown are:


- RAS**: Row Address Strobe, active low.
- UCAS/LCAS**: User Chip Address/Latch Enable, active low.
- Address**: Data bus address, alternating between Row and Column addresses.
- WE**: Write Enable, active low.
- OE**: Output Enable, active low.
- U I/O / L I/O**: User Input/Output or Latch Input/Output, active low.

Key timing parameters labeled include:

- t_{RAS} , t_{RHP} , t_{RP}
- t_{CRP} , t_{RCD} , t_{CSH} , t_{HCAS} , t_{THSH} , t_{THCAS} , t_{CPN}
- t_{ASR} , t_{RAD} , t_{RAH} , t_{ASC} , t_{CAH} , t_{TAL} , t_{ASC} , t_{CAH}
- t_{RCS} , t_{RCH} , t_{WPZ} , t_{TRH} , t_{TRAH} , t_{WZ}
- t_{OCH} , t_{OEZ} , t_{OLZ} , t_{TOFR} , t_{TOFC} , t_{TOEZ}
- t_{AAC} , t_{TAA} , t_{CAC} , t_{CLZ} , t_{LAA} , t_{LAC} , t_{LLZ}


30

Hyper Page Mode (EDO) Read Cycle ($\overline{\text{OE}}$ Control)

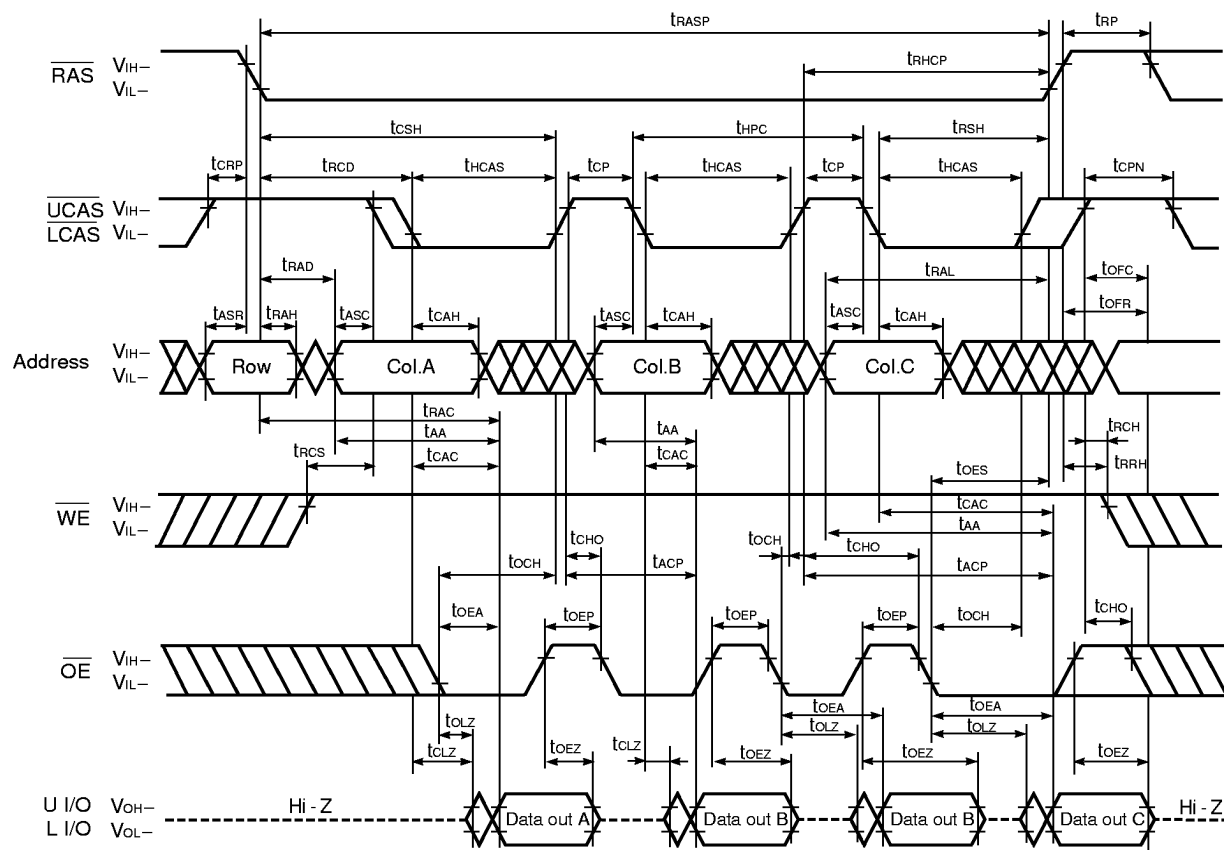

Remark In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.

Hyper Page Mode (EDO) Early Write Cycle

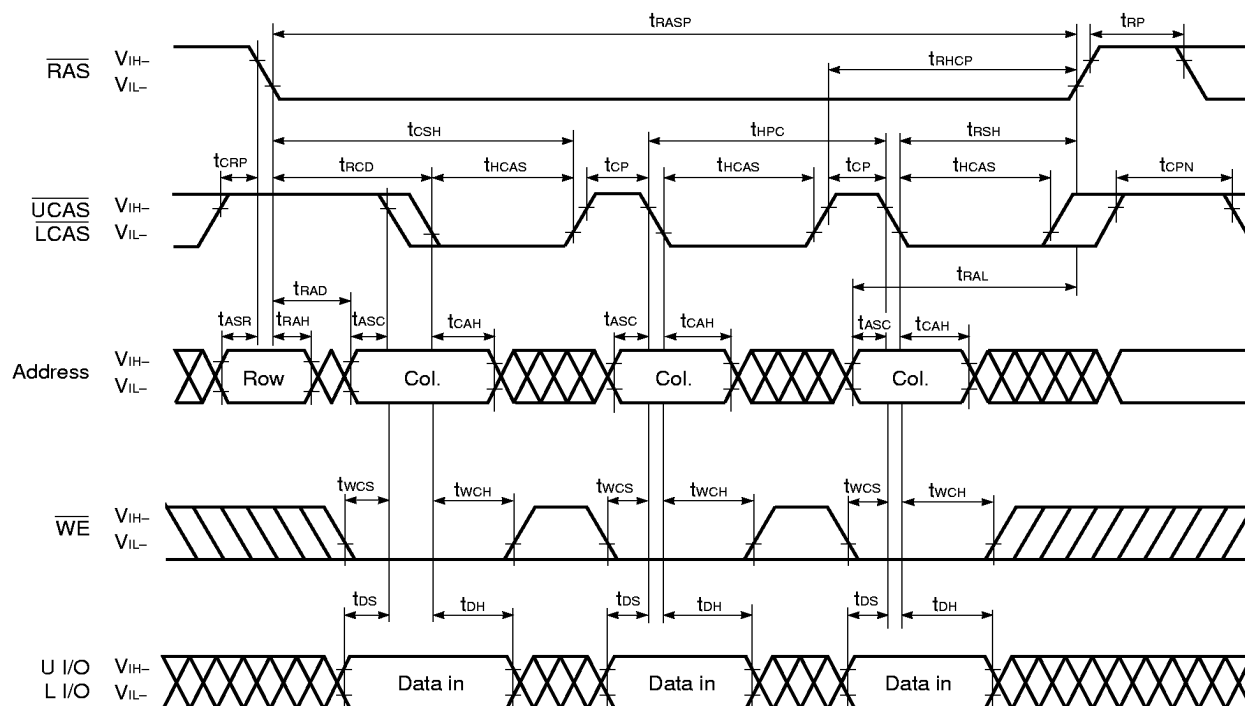

Remarks 1. $\overline{OE}$: Don't care

2. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{CAS}$ cycles within the same $\overline{RAS}$ cycle.

[illegible]

- Remarks**
1. $\overline{\text{OE}}$: Don't care
 2. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.
 3. This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.


[illegible]

34

[illegible]

- Remarks**
1. In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.
 2. This cycle can be used to control either $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ only. Or, it can be used to control $\overline{\text{UCAS}}$ or $\overline{\text{LCAS}}$ simultaneously, or at random.

Hyper Page Mode (EDO) Read Modify Write Cycle

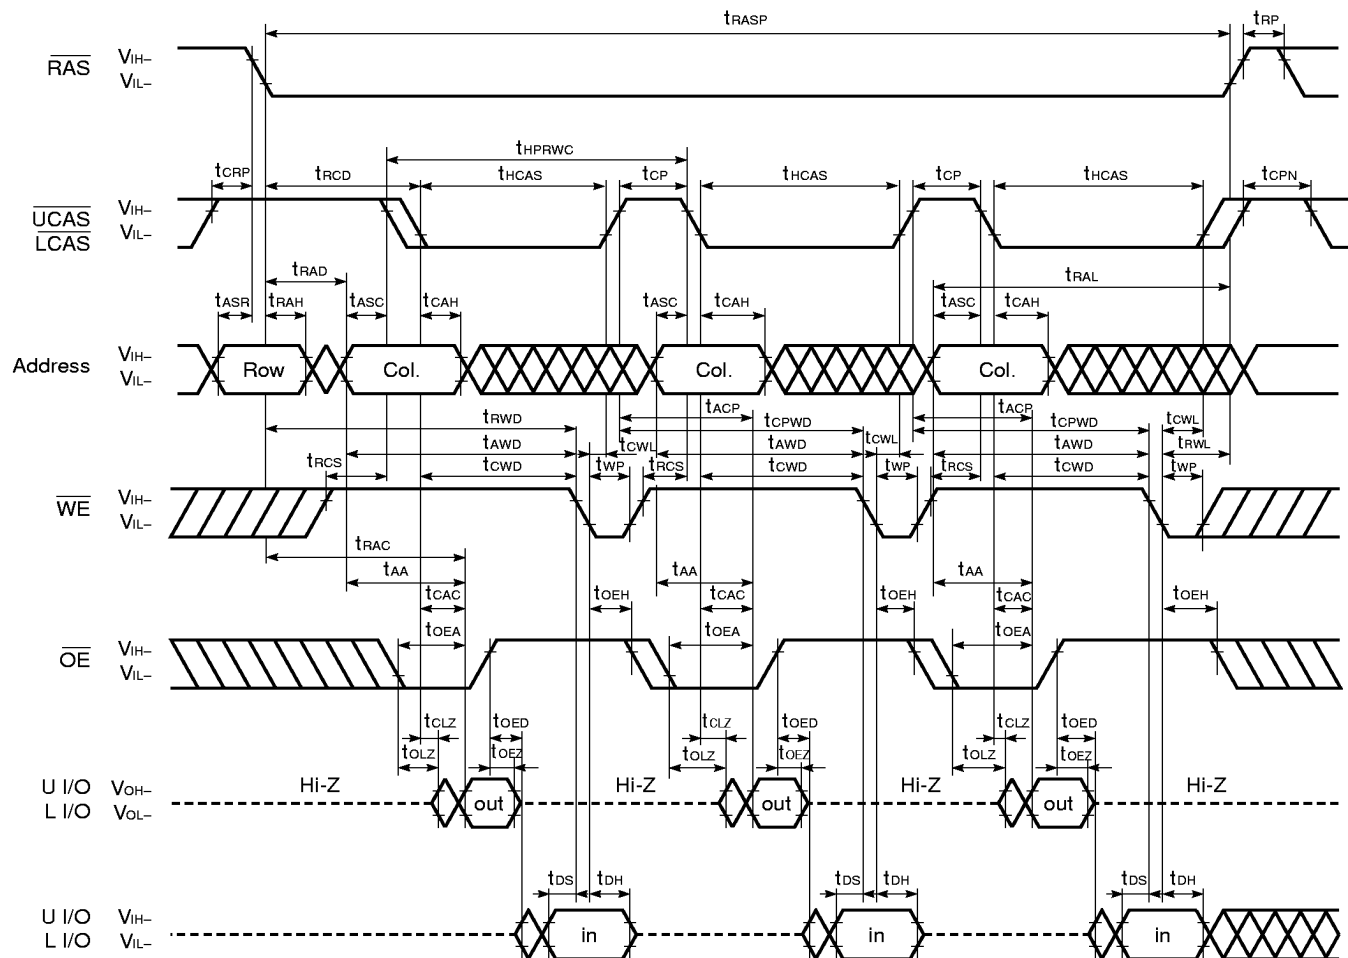

Remark In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.

The diagram illustrates the timing relationships between several control and data signals during DRAM operations. The signals shown are:

- RAS**: Row Address Strobe, active low.
- UCAS**: Universal Command Array Strobe, active low.
- LCAS**: Local Command Array Strobe, active low.
- Address**: Data bus for row and column addresses.
- WE**: Write Enable, active low.
- OE**: Output Enable, active low.
- I/O**: Data bus for input/output operations, split into User I/O (U I/O) and Local I/O (L I/O).

Key timing parameters indicated by arrows include:

- t_{TRP}**: RAS precharge time.
- t_{CRP}**: RAS-to-column refresh precharge time.
- t_{RCD}**: Row to column delay.
- t_{HPRWC}**: High precharge to write command delay.
- t_{CAS}**: Column Access Strobe delay.
- t_{CPN}**: Command precharge noise time.
- t_{CP}**: Command precharge time.
- t_{MRH}**: Memory Refresh Hold time.
- t_{RAD}**: Row Address Delay.
- t_{TASR}**, **t_{TRAH}**, **t_{ASC}**, **t_{CAH}**: Various address setup and hold times.
- t_{AWD}**, **t_{CWD}**, **t_{PWD}**, **t_{LWD}**: Write and precharge delays.
- t_{WPL}**: Write pulse width.
- t_{ACS}**: Array Clear Setup time.
- t_{AAC}**, **t_{OEH}**, **t_{CAC}**, **t_{OEA}**: Output enable setup and hold times.
- t_{CLZ}**, **t_{OLZ}**, **t_{OEZ}**: Output load and zeroing times.
- t_{DS}**, **t_{DH}**: Data strobe and hold times.


The diagram shows three distinct memory access cycles, each involving a Row Address phase followed by multiple Column Access phases. The signals are synchronized to a common clock edge at the beginning of each cycle.

- 37

[illegible]

Remark In the hyper page mode (EDO), read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.

CAS Before RAS Self Refresh Cycle (Only for the μPD42S16165)

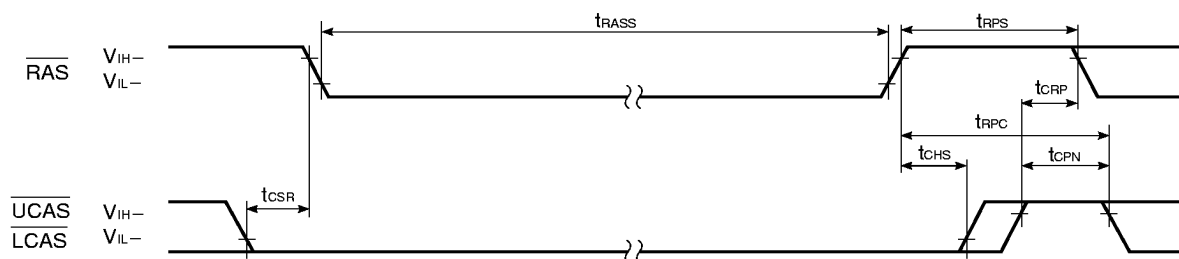


Remark Address, $\overline{WE}$, $\overline{OE}$: Don't care L I/O, U I/O: Hi-Z

Cautions on Use of CAS Before RAS Self Refresh


CAS before RAS self refresh can be used independently when used in combination with distributed CAS before RAS long refresh; However, when used in combination with burst CAS before RAS long refresh or with long RAS only refresh (both distributed and burst), the following cautions must be observed.

- (1) **Normal Combined Use of CAS Before RAS Self Refresh and Burst CAS Before RAS Long Refresh**
When CAS before RAS self refresh and burst CAS before RAS long refresh are used in combination, please perform CAS before RAS refresh 4,096 times within a 64 ms interval just before and after setting CAS before RAS self refresh.
- (2) **Normal Combined Use of CAS Before RAS Self Refresh and Long RAS Only Refresh**
When CAS before RAS self refresh and RAS only refresh are used in combination, please perform RAS only refresh 4,096 times within a 64 ms interval just before and after setting CAS before RAS self refresh.
- (3) If $t_{RASS(MIN.)}$ is not satisfied at the beginning of CAS before RAS self refresh cycles ($t_{RAS} < 100 \mu s$), CAS before RAS refresh cycles will be executed one time.
If $10 \mu s < t_{RAS} < 100 \mu s$, RAS precharge time for CAS before RAS self refresh (t_{RPS}) is applied.
And refresh cycles (4,096/128 ms) should be met.

For details, please refer to **How to use DRAM** User's Manual.

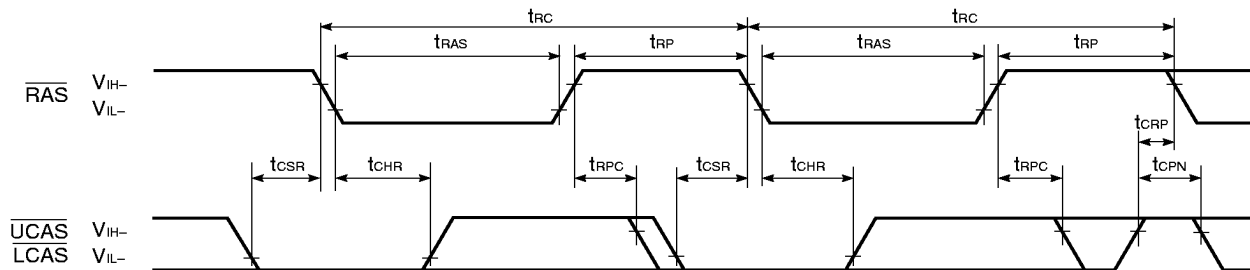
CAS Before RAS Refresh Cycle

Remark Address, $\overline{WE}$, $\overline{OE}$: Don't care L I/O, U I/O: Hi-Z

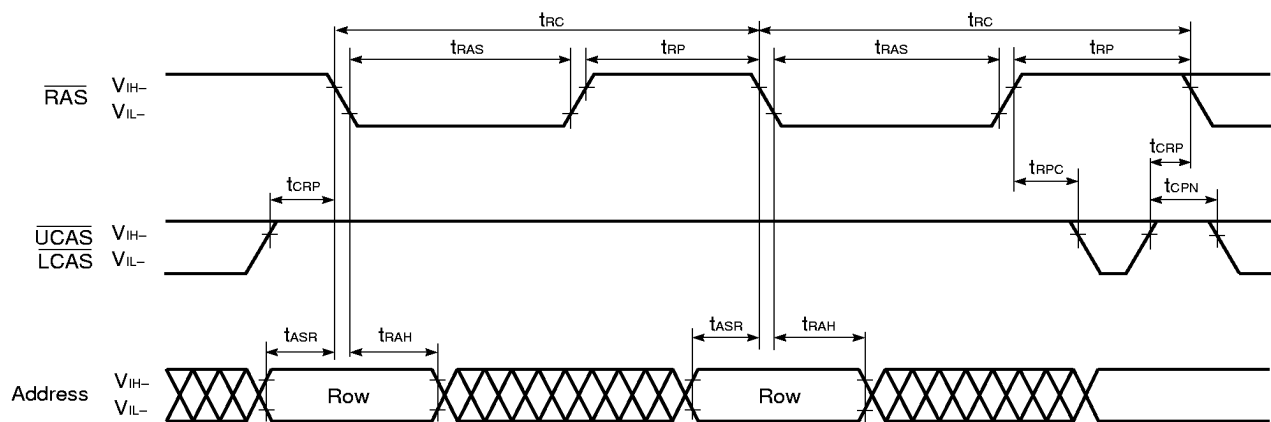
RAS Only Refresh Cycle

Remark $\overline{WE}$, $\overline{OE}$: Don't care L I/O, U I/O: Hi-Z

Hidden Refresh Cycle (Read)

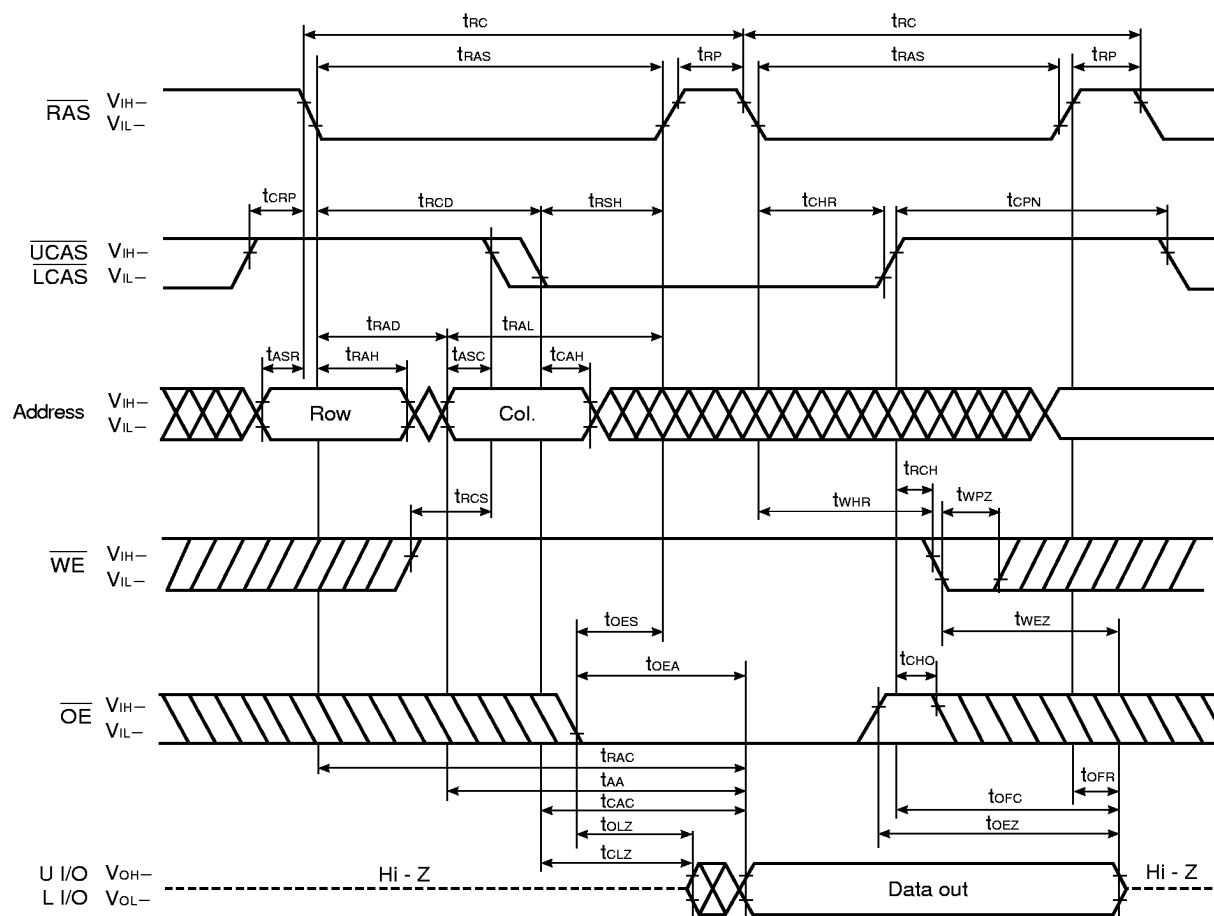


Hidden Refresh Cycle (Write)

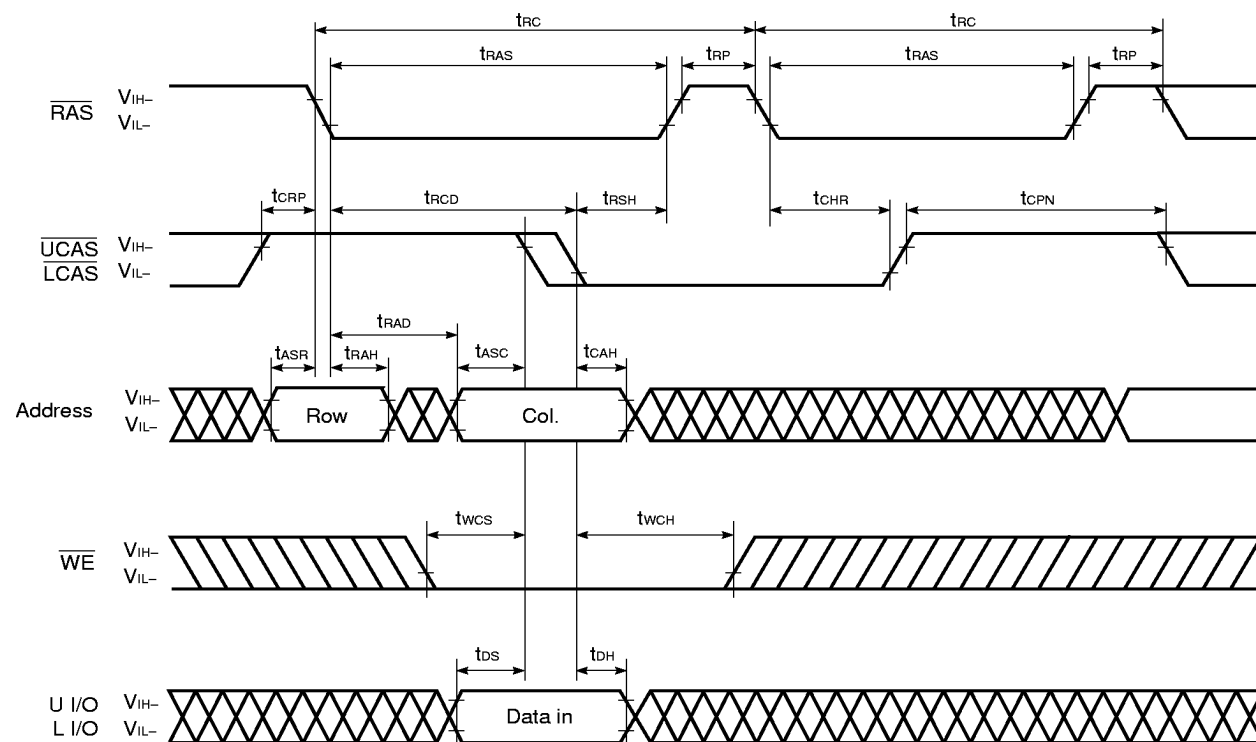

Remark $\overline{\text{OE}}$: Don't care

Package Drawings


50PIN PLASTIC TSOP(II) (400 mil)

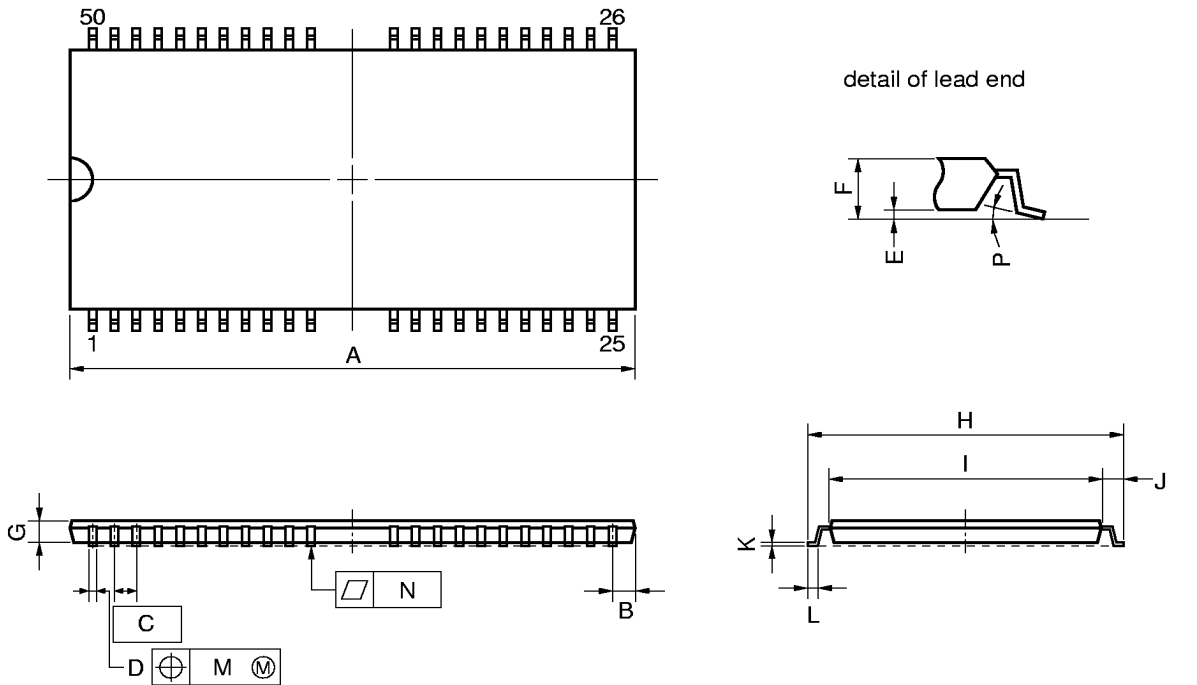

ITEM	MILLIMETERS	INCHES
A	21.17 MAX.	0.834 MAX.
B	1.0 MAX.	0.040 MAX.
C	0.8 (T.P.)	0.031 (T.P.)
D	0.32 ^{+0.08} _{-0.07}	0.013±0.003
E	0.1±0.05	0.004±0.002
F	1.2 MAX.	0.048 MAX.
G	0.97	0.038
H	11.76±0.2	0.463±0.008
I	10.16±0.1	0.400±0.004
J	0.8±0.2	0.031 ^{+0.009} _{-0.008}
K	0.145 ^{+0.025} _{-0.015}	0.006±0.001
L	0.5±0.1	0.020 ^{+0.004} _{-0.005}
M	0.13	0.005
N	0.10	0.004
P	3° ^{+7°} _{-3°}	3° ^{+7°} _{-3°}

S50G5-80-7JF4

42 PIN PLASTIC SOJ (400 mil)

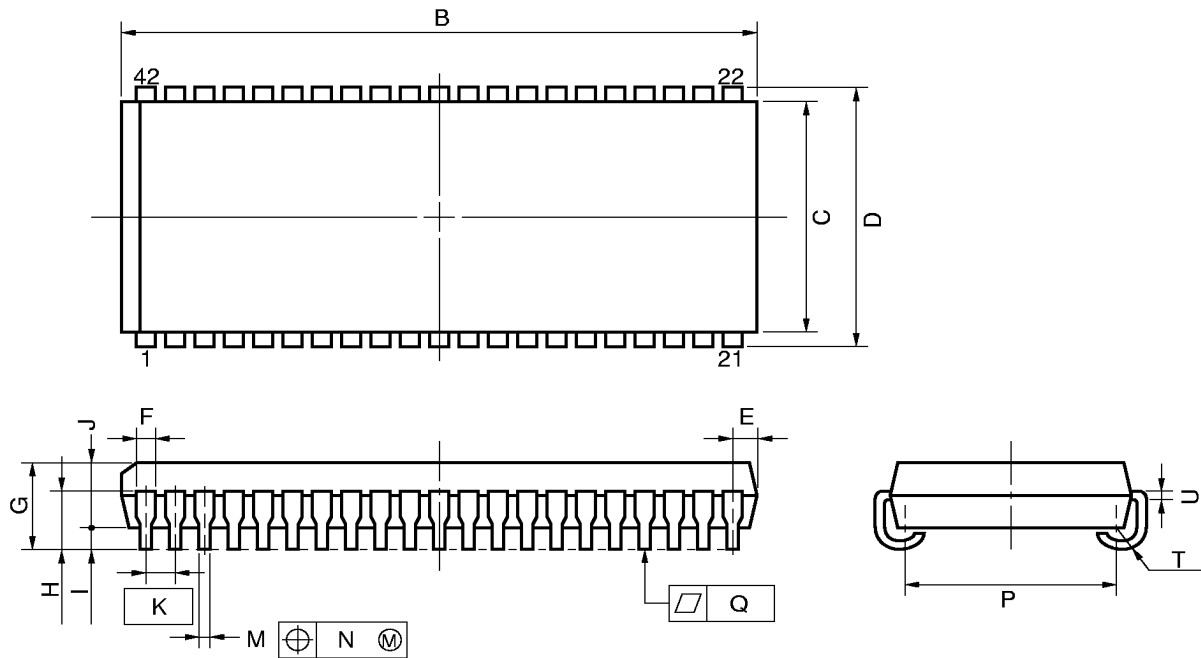**NOTE**

Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

P42LE-400A

ITEM	MILLIMETERS	INCHES
B	$27.56^{+0.2}_{-0.35}$	$1.085^{+0.008}_{-0.014}$
C	10.16	0.400
D	11.18 ± 0.2	0.440 ± 0.008
E	1.08 ± 0.15	$0.043^{+0.006}_{-0.007}$
F	0.74	0.029
G	3.5 ± 0.2	0.138 ± 0.008
H	2.545 ± 0.2	0.100 ± 0.008
I	0.8 MIN.	0.031 MIN.
J	2.6	0.102
K	1.27 (T.P.)	0.050 (T.P.)
M	0.40 ± 0.10	$0.016^{+0.004}_{-0.005}$
N	0.12	0.005
P	9.4 ± 0.20	0.370 ± 0.008
Q	0.10	0.004
T	R 0.85	R 0.033
U	$0.20^{+0.10}_{-0.05}$	$0.008^{+0.004}_{-0.002}$

★ Recommended Soldering Conditions

The following conditions (see tables below and next page) must be met for soldering conditions of the μ PD42S16165, 4216165.

For more details, refer to our document "SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL" (C10535E).

Please consult with our sales offices in case other soldering process is used, or in case the soldering is done under different conditions.

Types of Surface Mount Device

μ PD42S16165G5-7JF, 4216165G5-7JF: 50-pin plastic TSOP (II) (400 mil)

Soldering process	Soldering conditions	Symbol
Infrared ray reflow	Peak temperature of package surface: 235 °C or lower, Reflow time: 30 seconds or less (210 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (10 hours pre-baking is required at 125 °C afterwards)	IR35-107-3
VPS	Peak temperature of package: 215 °C or lower, Reflow time: 40 seconds or less (200 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (10 hours pre-baking is required at 125 °C afterwards)	VP15-107-3
Partial heating method	Terminal temperature: 300 °C or lower, Time: 3 seconds or lower (Per side of the package).	—

Note Exposure limit before soldering after dry-pack package is opened.
Storage conditions: 25 °C and relative humidity at 65 % or less.

Caution Do not apply more than one soldering method at any one time, except for "Partial heating method".

μ PD42S16165LE, 4216165LE: 42-pin plastic SOJ (400 mil)

Soldering process	Soldering conditions	Symbol
Infrared ray reflow	Peak temperature of package surface: 235 °C or lower, Reflow time: 30 seconds or less (210 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (20 hours pre-baking is required at 125 °C afterwards)	IR35-207-3
VPS	Peak temperature of package: 215 °C or lower, Reflow time: 40 seconds or less (200 °C or higher), Number of reflow processes: MAX. 3 Exposure limit: 7 days ^{Note} (20 hours pre-baking is required at 125 °C afterwards)	VP15-207-3
Partial heating method	Terminal temperature: 300 °C or lower, Time: 3 seconds or less (Per side of the package).	—

Note Exposure limit before soldering after dry-pack package is opened.
Storage conditions: 25 °C and relative humidity at 65 % or less.

Caution Do not apply more than one soldering method at any one time, except for “Partial heating method”.