

Radar Pulsed Power Transistor, 25W, 100 μ s Pulse, 10% Duty 3.1 - 3.4 GHz

PH3134-25M


V2.00

Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	65	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current (Peak)	I_C	3.0	A
Total Power Dissipation	P_{TOT}	159	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-65 to +200	°C

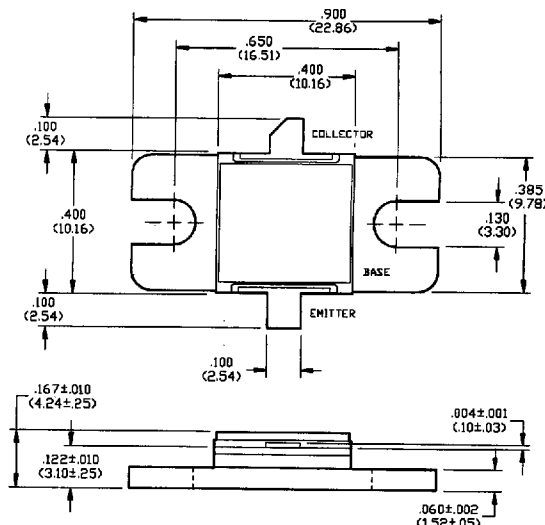


UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES $\pm .005$
(MILLIMETERS $\pm .13$ MM)

Electrical Characteristics at 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	65	-	V	$I_C = 10$ mA
Collector-Emitter Leakage Current	I_{CES}	-	1.5	mA	$V_{CE} = 40$ V
Thermal Resistance	$R_{TH(JC)}$	-	1.1	°C/W	$V_{CC} = 36$ V, $P_{OUT} = 25$ W, $F = 3.1, 3.25, 3.4$ GHz
Input Power	P_{IN}	-	4.45	W	$V_{CC} = 36$ V, $P_{OUT} = 25$ W, $F = 3.1, 3.25, 3.4$ GHz
Power Gain	G_P	7.5	-	dB	$V_{CC} = 36$ V, $P_{OUT} = 25$ W, $F = 3.1, 3.25, 3.4$ GHz
Collector Efficiency	η_C	35	-	%	$V_{CC} = 36$ V, $P_{OUT} = 25$ W, $F = 3.1, 3.25, 3.4$ GHz
Input Return Loss	RL	6	-	dB	$V_{CC} = 36$ V, $P_{OUT} = 25$ W, $F = 3.1, 3.25, 3.4$ GHz
Load Mismatch Tolerance	VSWR-T	-	2:1	-	$V_{CC} = 36$ V, $P_{OUT} = 25$ W, $F = 3.25$ GHz

Broadband Test Fixture Impedances

F(GHz)	$Z_{in}(\Omega)$	$Z_{out}(\Omega)$
3.10	$16.0 + j5.0$	$19.0 + j3.0$
3.25	$14.5 + j2.0$	$15.5 - j2.0$
3.40	$11.5 + j0.0$	$10.0 - j3.5$

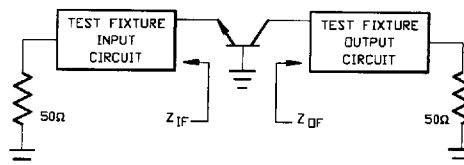

Specifications Subject to Change Without Notice.

9-238

MA-COM, Inc.


North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451


Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

5642205 0002066 6T4

RF Test Fixture

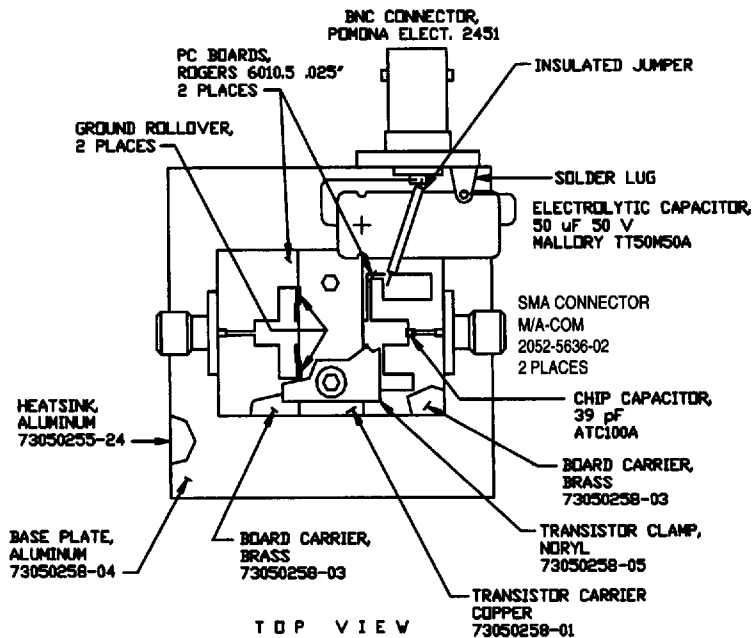

Test Fixture PC Board Dimensions

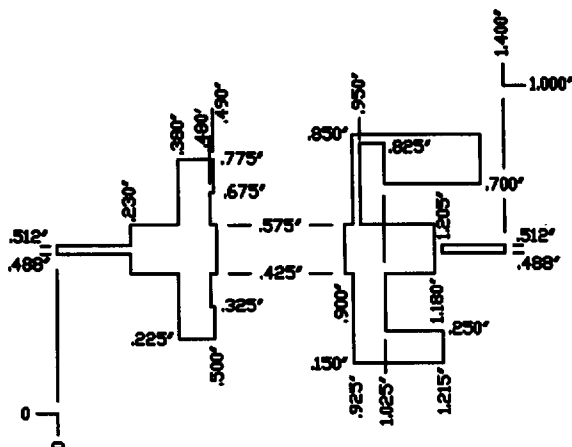

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

9-239

5642205 0002067 530