


Model 6554 Microline Passive Oscilloscope Probe

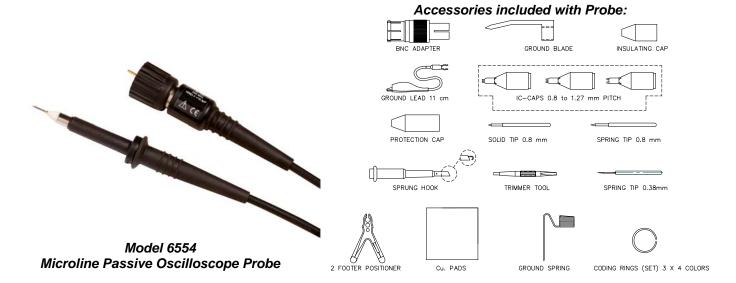

Features

- This probe is recommended for high performance probing applications and is adjustable for low and high frequencies.
- The probe's entire core is made of a high quality ceramic hybrid.
- Pure coaxial design and laser trimmed resistors ensure highest signal fidelity along the signal path offering high bandwidth and fast risetimes for accurate impulse measurements.
- Probe tips are interchangeable and can be replaced easily.
- Accessories (one of each) included with Probe are:
 - **BNC** Adapter
 - **Ground Blade**
 - **Ground Spring**
 - Ground Lead with Alligator Clip 11 cm (4.33")
 - IC Caps: 0.8mm, 1.0mm, and 1.27mm pitch
 - Insulating Cap
 - **Protection Cap**
 - Solid Tip 0.8mm (0.0315")
 - Spring Tips 0.8mm (0.0315") & 0.38mm (0.015")
 - Sprung Hook
 - **Trimmer Tool**
 - 2 Footer Positioner
 - Coding Rings (Set) 3 X 4 colors
 - Copper (Cu) Pads

Sales: 800-490-2361 Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

USA:

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

Our passive probes are spring loaded, with needle sharp tips to support precise and safe measurements.

Specifications

Attenuation Ratio	10:1
Maximum Input Voltage CAT II ¹	300 Vrms
Scope Bandwidth MHz	500
System Bandwidth MHz (-3 dB)	500
System Risetime (ns)	< 0.7
Probe Input Resistance (MΩ)	10
Probe Input Capacitance (pF)	< 11
Compensation Range (pF)	10 - 20
Cable Length	4 ft. (1.2 m)

¹ Rating: Per IEC 61010-031. Maximum voltage allowed on the low or ground connection including shell and housing must not exceed 30 V.

Ordering Information

Model: 6554

500 MHz O-Scope Probe

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.