






**Applications**

- Motor Control
- Overvoltage Crowbar Protection
- Capacitive Discharge Ignition
- Voltage Regulation
- Welding Equipment
- Capacitive Filter Soft Start (Inrush Current Control)

- Suitable for General Purpose AC Switching
- IGT 40 mA Max.
- Isolated and Non-Isolated Tab
- $V_{DRM}/V_{RMM}$  400, 600, 800, 1000V



**Absolute Maximum Ratings**

	CONDITIONS	SYMBOL	RATING
RMS On-State Current (full sine wave)	$T_c = 100^\circ\text{C}$ $T_c = 75^\circ\text{C}$ TO-220AB TO-220AB Iso	$I_{T(RMS)}$	25A
Average On-State Current	$T_c = 100^\circ\text{C}$ $T_c = 75^\circ\text{C}$ TO-220AB TO-220AB Iso	$I_{T(RMS)}$	16A
Non Repetitive Surge Peak On-State Current (Full Cycle, $T_j$ Initial = $25^\circ\text{C}$ )	F = 50 Hz F = 60 Hz	$I_{TSM}$	320A 350A
$I^2t$ Value for fusing	$t_p = 10$ ms	$I^2t$	510A <sup>2</sup> s
Critical rate of rise of on-state current $I_G = 2 \times I_{GT}$ , $t_r < 100$ ns, $T_j = 125^\circ\text{C}$	F = 60 Hz	di/dt	50A/ $\mu$ s
Peak Gate Current @ $T_j = 125^\circ\text{C}$	$t_p = 20$ $\mu$ s	$I_{GM}$	4A
Average Gate Power Dissipation @ $T_j = 125^\circ\text{C}$		PG(AV)	1W
Storage Temperature Range		$T_{stg}$	-40 to +150 $^\circ\text{C}$
Operating Junction Temperature Range		$T_j$	-40 to +125 $^\circ\text{C}$
Isolation Voltage (CYNA Series only)		$V_{ISO}$	2500V <sub>RMS</sub>
Maximum Peak Reverse Gate Voltage		$V_{RGM}$	5V

**Electrical Characteristics**<sup>NOTE 1</sup>

$I_{GT}$ MAX @ $V_D = 12$ V, $R_L = 30\Omega$		40mA
$V_{GT}$ MAX @ $V_D = 12$ V, $R_L = 30\Omega$		1.3V
$V_{GD}$ MIN @ $V_D = V_{DRM}$ , $R_L = 3.3k\Omega$	$T_j = 125^\circ\text{C}$	0.2V
$I_H$ MAX @ $I_T = 500$ mA (gate open)		50mA
$I_L$ MAX @ $I_G = 1.2 I_{GT}$		90mA
dv/dt MIN @ $V_D = 67\%V_{DRM}$ (gate open)	$T_j = 125^\circ\text{C}$	1000V/ $\mu$ s
$V_{TM}$ MAX @ $I_{TM} = 32$ A, $t_p = 380\mu$ s	$T_j = 25^\circ\text{C}$	1.6V
$I_{DRM}$ MAX @ $V_{DRM} = V_{RRM}$	$T_j = 25^\circ\text{C}$	5 $\mu$ A
$I_{RRM}$ MAX @ $V_{DRM} = V_{RRM}$	$T_j = 125^\circ\text{C}$	4mA



**GENERAL NOTES**

1. All parameters at 25 degrees C unless otherwise specified.

**Thermal Resistances**

		SYMBOL	RATING
Junction to Case (AC)	TO-220AB	$R_{th(j-c)}$	1.0°C/W
Junction to Case (AC)	TO-220AB Isolated	$R_{th(j-c)}$	1.9°C/W
Junction to Ambient	TO-220AB	$R_{th(j-a)}$	60°C/W
Junction to Ambient	TO-220AB Isolated	$R_{th(j-a)}$	60°C/W

**Part Number Designation**

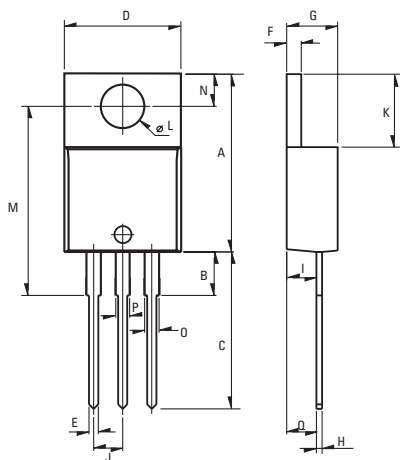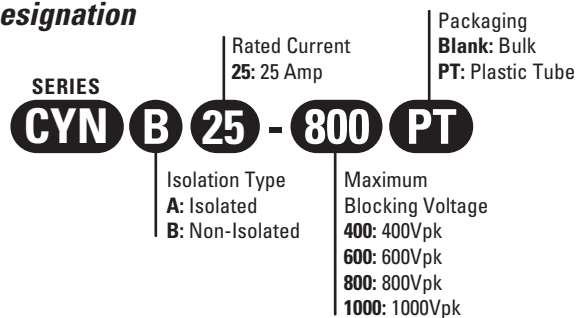

Weight: 2.3g (0.08 oz)

**Dimensions**

REF.	Millimeters		Inches		
	Min.	Typ.	Min.	Typ.	Max.
A	15.24		0.6		0.62
B		3.23		0.127	
C	12.78		0.503		0.543
D	9.96		0.392		0.408
E	0.69		0.027		0.037
F	1.22		0.048		0.052
G	4.62		0.182		0.19
H	0.46		0.018		0.024
I	2.49		0.098		0.112
J	2.39		0.094		0.106
K	6.48		0.255		0.271
L	3.78		0.149		0.153
M	15.49	16	0.61	0.63	0.65
N	2.59		0.102		0.114
O	0.99		0.039		0.061
P	0.99		0.039		0.061
Q		2.67		0.105	

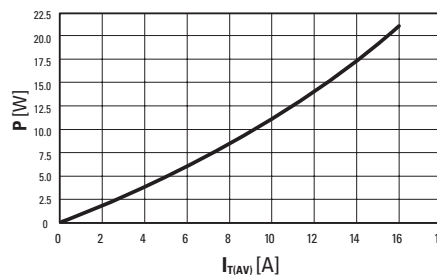


Fig. 1: Power dissipation versus average on-state current.

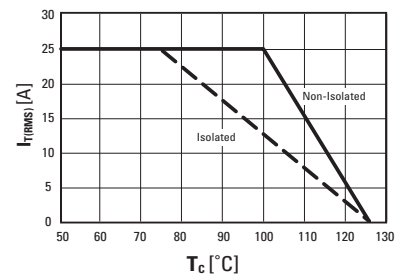


Fig. 2: RMS on-state current versus case temperature (full cycle)

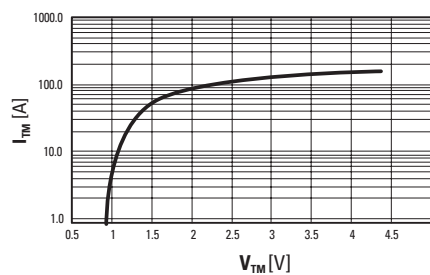


Fig. 3: On-state current versus on-state voltage (instantaneous values)

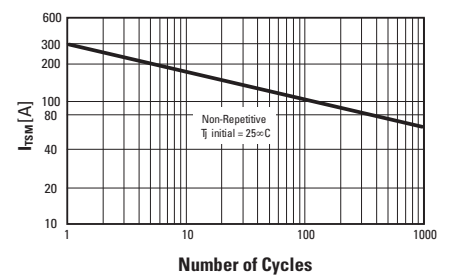


Fig. 4: Non-repetitive surge peak on-state current versus number of cycles.

ISO9001 CERTIFIED

**Approvals**

UL Recognized Component - E72445 (CYNA Series)

**USA**

Sales & Tech Support (866) 258-5057  
Email: sales@cynergy3.com

Cynergy3 Components  
2320 Paseo de las Americas, Suite 104  
San Diego, CA 92154

**EUROPE - UK**

Telephone +44 (0) 1202 897969  
Fax +44 (0) 1202 891918

Email: sales@cynergy3.com  
Cynergy3 Components Ltd.  
7 Cobham Road  
Ferndown Industrial Estate  
Wimborne, Dorset BH21 7PE

**ASIA - Thailand**

Telephone +66 (0)2 665 2517  
Fax +66 (0)2 665 2588

Cynergy 3 Components, Asia  
18/8 Fico Place 12th Floor  
Soi Sukhumvit 21 (Asoke)  
Klongtoey Nua, Wattana  
Bangkok, Thailand 10110