



PDM-24-13G SQ
0° DIVIDERS / COMBINERS

REV: 004, 02/08/01

- SPACE QUALIFIED
- 8 - 18 GHz, 2 WAY, SMA



TECHNICAL DESCRIPTION / APPLICATION


SERIES 06

The PDM-24-13G SQ 2-way In-Phase Power Divider/Combiner covers 8-18 GHz. It uses a conventional Wilkinson design which provides high isolation and low VSWR. This unit has been designed, manufactured and qualified per Merrimac document CENG-0001, "Standard Design Requirements for Space Qualified Devices".

GENERAL SPECIFICATIONS

MODEL NUMBER	FREQUENCY RANGE GHz	ISOLATION dB		INSERTION LOSS		AMPLITUDE BALANCE		VSWR MAX	
		MIN.	MAX.	MAX.	MAX.	IN	OUT		
PDM-24-13G SQ	8.0 - 18.0	19		0.7 dB		0.2 dB		1.35:1	1.4:1
PHASE BALANCE	CW INPUT WITH LOAD VSWR 1.2:1		IMPEDANCE		OPERATING TEMPERATURE		WEIGHT		
±5°	2 W		50 OHM		-55° to +85 ° C		1.2 oz		

PACKAGE OUTLINE

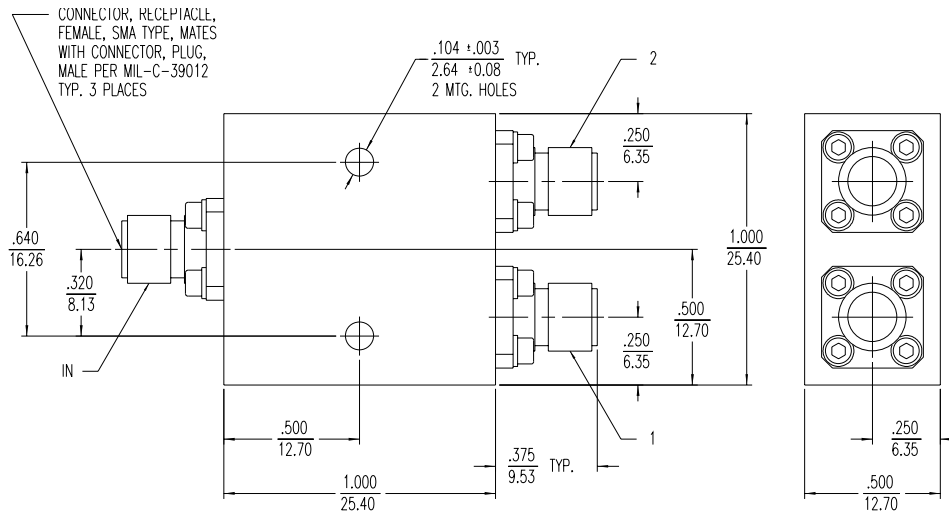

NOTES:

1. TOLERANCE ON 3 PLACE DECIMALS ±.020 (.51mm) EXCEPT AS NOTED.
2. DIMENSIONS IN INCHES OVER MILLIMETERS.