

Coaxial

# Power Splitter/Combiner

## ZSC-2-2+

2 Way-0° 50Ω 0.002 to 60 MHz



CASE STYLE: M22

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

At low range frequency band ( $f_L$  to  $10 f_L$ ), linearly derate maximum input power by 13 dB.

### Coaxial Connections

SUM PORT	2
PORT 1	1
PORT 2	3

### Outline Drawing

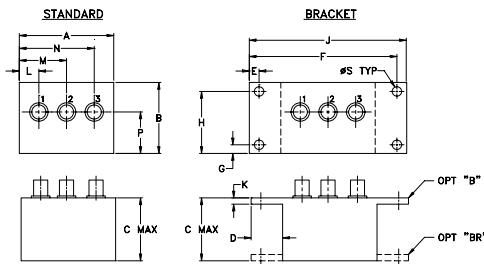

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

### Features

- low insertion loss, 0.3 dB typ.
- high isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case

### Applications

- HF
- amateur radio




### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)			
	L*		M		U		L		M		U		L	M	U	L	M	U	
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.	
$f_L$ - $f_U$																			
0.002-60	25	20	30	20	27	20	0.3	0.6	0.3	0.6	0.6	1.0	2	3	4	0.15	0.25	0.30	


L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
 \* Isolation specified to 0.006 MHz.

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.002	3.16	3.16	0.00	27.14	0.02	1.16	1.26	1.25
1.000	3.07	3.07	0.00	38.30	0.00	1.10	1.03	1.03
4.000	3.12	3.12	0.00	36.75	0.00	1.11	1.02	1.02
7.000	3.16	3.16	0.00	34.64	0.01	1.12	1.02	1.02
10.000	3.20	3.20	0.00	32.84	0.02	1.13	1.01	1.01
16.000	3.26	3.26	0.00	30.25	0.03	1.14	1.01	1.01
20.000	3.30	3.30	0.00	29.06	0.03	1.15	1.02	1.02
24.000	3.33	3.33	0.00	28.17	0.03	1.15	1.03	1.03
28.000	3.36	3.36	0.00	27.55	0.03	1.15	1.05	1.05
32.500	3.40	3.39	0.00	27.09	0.03	1.14	1.06	1.06
40.000	3.46	3.45	0.00	26.88	0.04	1.13	1.10	1.10
47.500	3.52	3.52	0.00	27.26	0.04	1.11	1.14	1.14
50.000	3.54	3.54	0.00	27.49	0.04	1.10	1.15	1.15
55.000	3.59	3.59	0.00	27.99	0.04	1.10	1.18	1.18
60.000	3.64	3.63	0.00	28.23	0.04	1.11	1.21	1.22

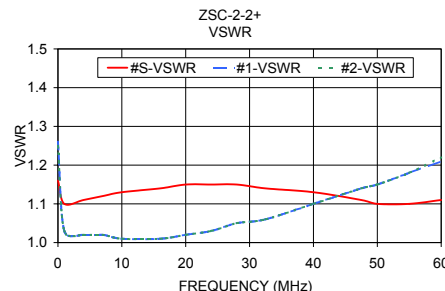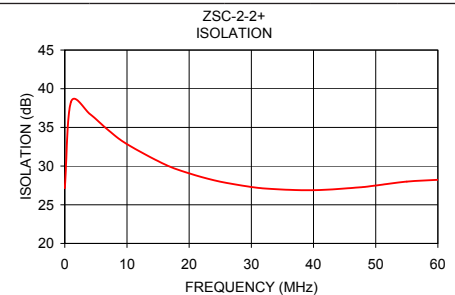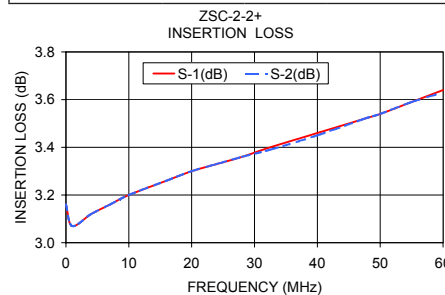

### electrical schematic



**Mini-Circuits®**  
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

REV. B  
 M121747  
 ZSC-2-2+  
 HY/TD/CP/AM  
 090303

IF/RF MICROWAVE COMPONENTS