



3DD4623H

主要参数 MAIN CHARACTERISTICS

I_C	1.0A
V_{CEO}	800V
V_{CES}	1200V
$P_C(TO-92)$	1W
$P_C(TO-126)$	20W

用途

- 充电器
- 电子镇流器
- 高频开关电源
- 高频功率变换
- 一般功率放大电路

APPLICATIONS

- Battery charger
- Electronic ballasts
- High frequency switching power supply
- High frequency power transform
- Commonly power amplifier


产品特性

- 高耐压
- 高电流容量
- 高开关速度
- 高可靠性
- 环保 (RoHS) 产品


FEATURES

- High breakdown voltage
- High current capability
- High switching speed
- High reliability
- RoHS product


封装 Package



TO-92



TO-126



订货信息 ORDER MESSAGE

订货型号 Order codes	印记 Marking	无卤素 Halogen Free	封装 Package	包装 Packaging
3DD4623H-O-T-B-A	D4623H	否 NO	TO-92	编带 Brede
3DD4623H-O-T-N-C	D4623H	否 NO	TO-92	袋装 Bag
3DD4623H-R-T-B-A	D4623H	是 YES	TO-92	编带 Brede
3DD4623H-R-T-N-C	D4623H	是 YES	TO-92	袋装 Bag
3DD4623H-O-M-N-C	D4623H	否 NO	TO-126	袋装 Bag
3DD4623H-O-M-N-B	D4623H	否 NO	TO-126	条管 Tube
3DD4623H-R-M-N-C	D4623H	是 YES	TO-126	袋装 Bag
3DD4623H-R-M-N-B	D4623H	是 YES	TO-126	条管 Tube

印记 SIGIL



无卤素标记“R”
Halogen Free Sign “R”



绝对最大额定值 ABSOLUTE RATINGS ($T_c=25^{\circ}\text{C}$)

项 目 Parameter	符 号 Symbol	数 值 Value	单 位 Unit
集电极—发射极直流电压 Collector- Emitter Voltage ($V_{BE}=0$)	V_{CES}	1200	V
集电极—发射极直流电压 Collector- Emitter Voltage ($I_B=0$)	V_{CEO}	800	V
发射极—基极直流电压 Emitter-Base Voltage	V_{EBO}	9	V
最大集电极直流电流 Collector Current (DC)	I_C	1.0	A
最大集电极脉冲电流 Collector Current (pulse)	I_{CP}	2.0	A
最大集电极耗散功率 Total Dissipation (TO-92)	P_C	1	W
最大集电极耗散功率 Total Dissipation (TO-126)	P_C	20	W
最高结温 Junction Temperature	T_j	150	$^{\circ}\text{C}$
贮存温度 Storage Temperature	T_{stg}	-55~+150	$^{\circ}\text{C}$

电特性 ELECTRICAL CHARACTERISTIC

项 目 Parameter	测试条件 Tests conditions	最小值 Value(min)	典型值 Value(typ)	最大值 Value(max)	单位 Unit
$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	800	850	-	V
$V_{(BR)CBO}$	$I_C=1\text{mA}, I_B=0$	1200	1300	-	V
$V_{(BR)EBO}$	$I_E=1\text{mA}, I_C=0$	9	14	-	V
I_{CBO}	$V_{CB}=1200\text{V}, I_E=0$	-	-	5	μA
I_{CEO}	$V_{CE}=800\text{V}, I_B=0$	-	-	1	mA
I_{EBO}	$V_{EB}=7\text{V}, I_C=0$	-	-	5	μA
hFE	$V_{CE}=5\text{V}, I_C=10\text{mA}$	10	18	-	-
	$V_{CE}=5\text{V}, I_C=0.2\text{A}$	10	20	40	-
	$V_{CE}=5\text{V}, I_C=0.5\text{A}$	5	8	30	-
$V_{CE(sat)}$	$I_C=0.5\text{A}, I_B=0.1\text{A}$	-	0.5	1.0	V
$V_{BE(sat)}$	$I_C=1.0\text{A}, I_B=250\text{mA}$	-	1.0	1.2	V
t_f	$V_{CC}=125\text{V}, I_C=0.1\text{A},$	-	-	0.7	μS
t_s	$I_{B1}=-I_{B2}=0.02\text{A}$	-	-	5	μS
f_T	$V_{CE}=10\text{V}, I_C=0.1\text{A}$	4	-	-	MHz




热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最小值 Value(min)	最大值 Value(max)	单 位 Unit
结到环境的热阻 TO-92 Thermal Resistance Junction Case TO-92	$R_{th(j-a)}$	-	125	$^{\circ}\text{C/W}$
结到管壳的热阻 TO-126 Thermal Resistance Junction Case TO-126	$R_{th(j-c)}$	-	6.25	$^{\circ}\text{C/W}$







特征曲线 ELECTRICAL CHARACTERISTICS (curves)

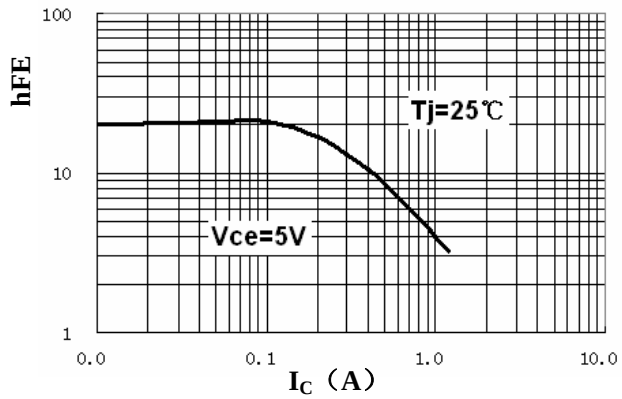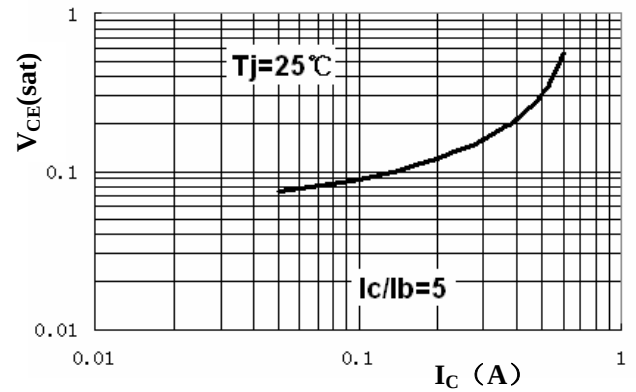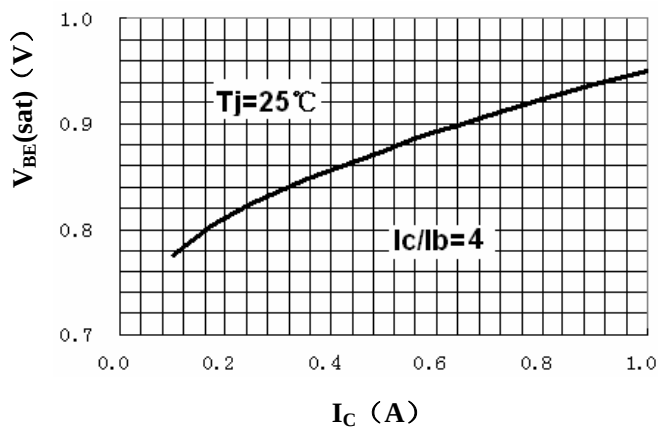hFE - I_C  $V_{CE(sat)}$ - I_C  $V_{BE(sat)}$ - I_C 

SOA

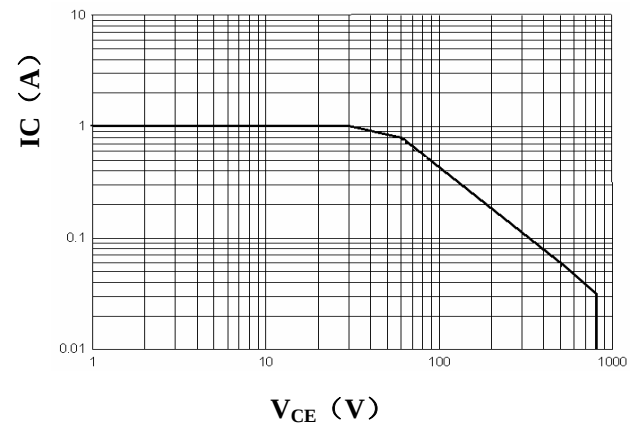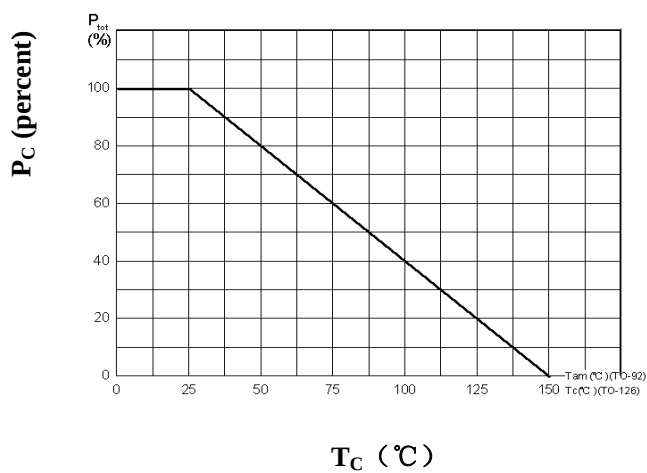
 P_C - T_C 




3DD4623H

外形尺寸 PACKAGE MECHANICAL DATA
TO-92

单位 Unit : mm

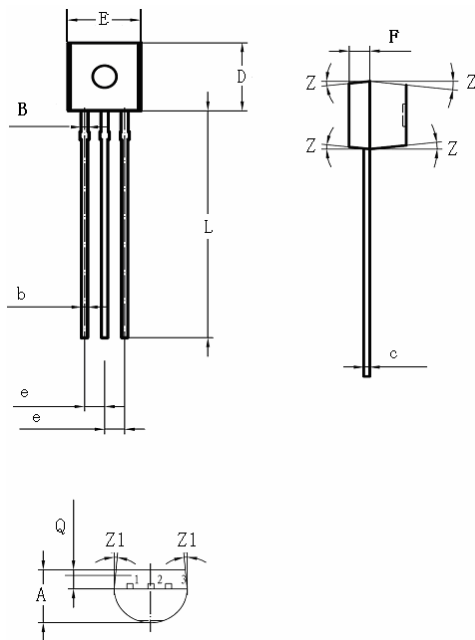


A	3.30-3.90
B	0.35-0.55
b	0.35-0.55
c	0.31-0.51
D	4.30-4.90
E	4.30-4.90
e	1.17-1.37
F	1.00-1.60
L	12.50-15.50
Q	1.00-1.60
Z	2°
Z1	5°

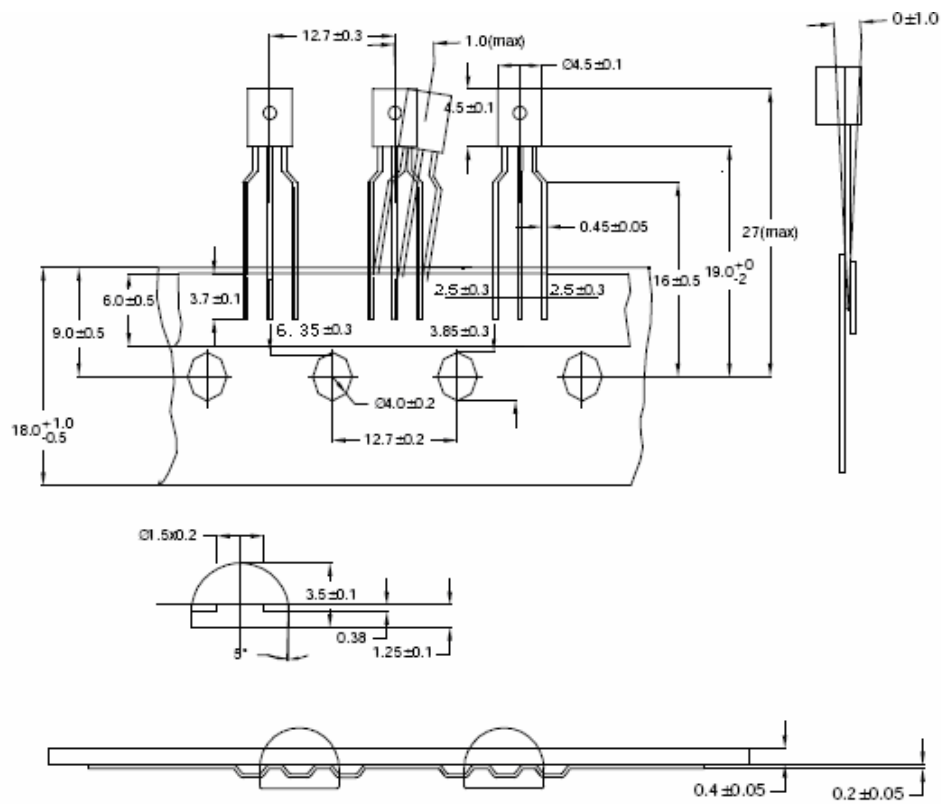



外形尺寸 PACKAGE MECHANICAL DATA
TO-126

单位 Unit : mm

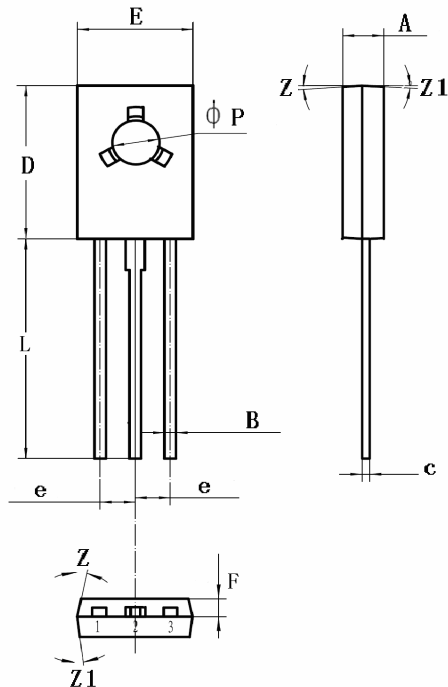

A	2.50-2.90
B	0.60-0.90
C	0.30-0.70
D	10.50-11.10
E	7.10-8.10
e	2.19-2.39
L	14.0-17.0
F	1.07-1.47
Z	4°
Z1	3°
P	2.90-3.30



**注意事项**

- 1.吉林华微电子股份有限公司的产品销售分为直销和销售代理，无论哪种方式，订货时请与公司核实。
- 2.购买时请认清公司商标，如有疑问请与公司本部联系。
- 3.在电路设计时请不要超过器件的绝对最大额定值，否则会影响整机的可靠性。
- 4.本说明书如有版本变更不另外告知

NOTE

1. Jilin Sino-microelectronics co., Ltd sales its product either through direct sales or sales agent , thus, for customers, when ordering , please check with our company.
2. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
3. Please do not exceed the absolute maximum ratings of the device when circuit designing.
4. Jilin Sino-microelectronics co., Ltd reserves the right to make changes in this specification sheet and is subject to change without prior notice.

联系方式**吉林华微电子股份有限公司**

公司地址：吉林省吉林市深圳街 99 号

邮编：132013

总机：86-432-64678411

传真：86-0432-64665812

网址：www.hwdz.com.cn

市场营销部

地址：吉林省吉林市深圳街 99 号

邮编：132013

电话：86-432-64675588

64675688

64678411-3098/3099

传真：86-432-64671533

CONTACT**JILIN SINO-MICROELECTRONICS CO., LTD.**

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.

Post Code: 132013

Tel: 86-432-64678411

Fax: 86-432-64665812

Web Site: www.hwdz.com.cn

MARKET DEPARTMENT

ADD: No.99 Shenzhen Street, Jilin City, Jilin Province, China.

Post Code: 132013

Tel: 86-432-64675588

64675688

64678411-3098/3099

Fax: 86-432-64671533

附录（Appendix）：修订记录（Revision History）

日期 Date	旧版本 Last Rev.	新版本 New Rev.	修订内容 Description of Changes
2009-5-11	200902A	200905B	版式
2009-5-21	200905B	200905C	hFE 典型值及测试条件
2009-10-29	200905C	200910D	电话号码、订货代码

