



**CONNOR-WINFIELD
CORPORATION**

AURORA, IL. 60505

PHONE (708) 851-4722

FAX (708) 851-5040



CABLE: CONWIN WCGO

T-50-23

OSCILLATORS

LOW CURRENT CMOS DIP MODELS C16R6, C17R6, C16R6L & C17R6L

SPECIFICATIONS	C16R6	C17R6	C16R6L	C17R6L
Fixed Frequencies Available	1Hz to 200Hz		200Hz to 4MHz	
Frequency Tolerance	± .01%			
Temperature Range	-40°C to +85°C	-55°C to +125°C	-40°C to +85°C	-55°C to +125°C
Output	CMOS Squarewave Duty Cycle: 50/50 ±10%			
Supply Voltage	+5Vdc to +15Vdc			
Supply Current	3 to 20mA		2mA at 5Vdc 15mA at 15Vdc	
Package	All metal, hermetically sealed, welded package.			

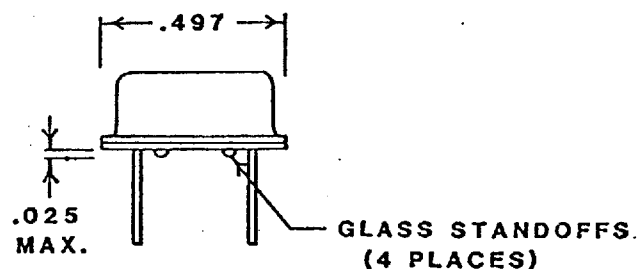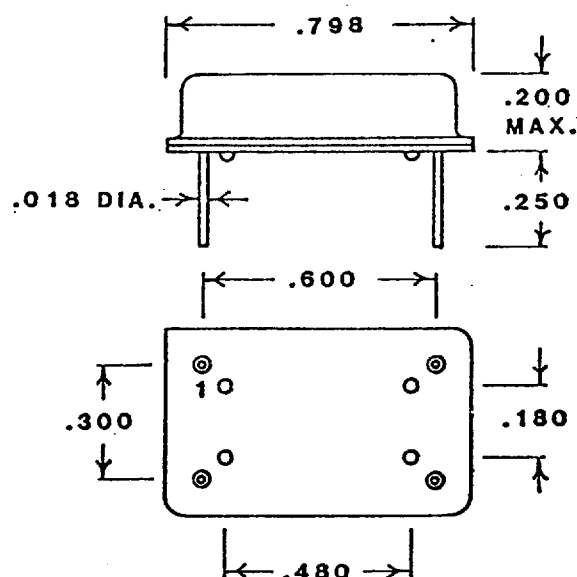

PIN	CONNECTION
1	N/C
7	GROUND
8	OUTPUT
14	(+) SUPPLY

Dimensional Tolerance: $\pm .005$
All dimensions in inches.

10-18-90

Please phone or write for additional information.

Bulletin subject to change without notice.