

C 9860

Features:

- epoxy-coated low profile housing
- high permissible power dissipation
- high operation voltage

Application:

- exposure meters
- automatic street lamp switching
- burner controls



C 9872

Features:

- epoxy-coated low profile housing
- rapid response
- type 72 material

Application:


- autofocus
- automatic street lamp switching
- burner controls

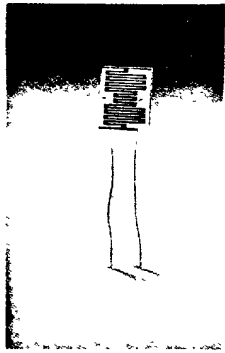


TYP	R ₁₀ [kΩ]	R ₁₀₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{an} [ms]	t _{ab} [ms]	TK [%K]
C 9860 21	1,35	0,37	10	30	175	400	60	35	0,3
9860 22	2,3	0,51	30	90	175	400	50	30	0,35
9860 23	6,0	0,85	90	270	175	400	35	28	0,4
9860 24	19,5	1,65	1 700	5 100	175	400	20	25	0,5
C 9860 41	18,0	4,6	80	240	600	400	60	35	0,3
9860 42	35	6,6	240	720	600	400	50	30	0,35
9860 43	73	10,3	740	2 200	600	400	35	28	0,4
9860 44	266	20,5	13 000	39 000	600	400	20	25	0,5
C 9872 21*	3,3	0,5	46	138	175	150	10	10	2
9872 22*	11,7	0,98	460	1 380	175	150	10	10	2
9872 23*	42	1,8	9 300	28 000	175	150	7	10	2
9872 24*	192	4,4	100 000	100 000	175	150	5	10	2

*on special request and with higher quantities only

C 9860 ...

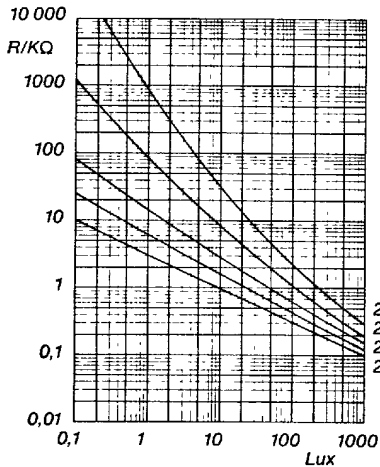

C 9860 ...

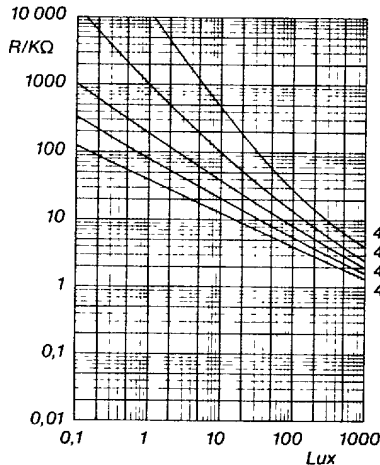

C 9872 ...

