

SANYO

No.688G

2SB827/2SD1063

PNP/NPN Epitaxial Planar Silicon Transistors

50V/7A Switching Applications

Use : Universal high current switching as solenoid driving, high speed inverter and converter.

Features :

- Low saturation voltage : $V_{CE(sat)} = (-)0.4V$ max.
- Wide ASO.

() shows the case of 2SB827 only.

Absolute Maximum Ratings at $T_a = 25^\circ C$

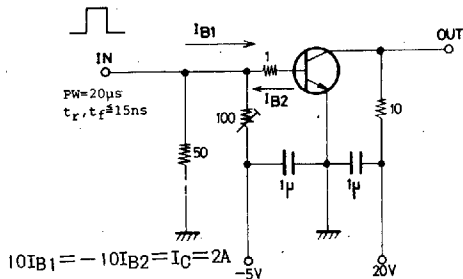
Collector-to-Base Voltage	V_{CBO}	(-)60	V
Collector-to-Emitter Voltage	V_{CEO}	(-)50	V
Emitter-to-Base Voltage	V_{EBO}	(-)6	V
Collector Current	I_C	(-)7	A
Collector Current(Pulse)	I_{CP}	(-)14	A
Collector Dissipation	P_C	60	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature	T_{stg}	-55 to +150	$^\circ C$

 $T_C = 25^\circ C$ **Electrical Characteristics at $T_a = 25^\circ C$**

			min	typ	max	unit
Collector Cut off Current	I_{CBO}	$V_{CB} = (-)40V, I_E = 0$			(-)0.1	mA
Emitter Cut off Current	I_{EBO}	$V_{EB} = (-)4V, I_C = 0$			(-)0.1	mA
DC Current Gain	$h_{FE}(1)$	$V_{CE} = (-)2V, I_C = (-)1A$	70*		280*	
	$h_{FE}(2)$	$V_{CE} = (-)2V, I_C = (-)5A$	30			
Gain Bandwidth Product	f_T	$V_{CE} = (-)5V, I_C = (-)1A$		10		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)4A, I_B = (-)0.4A$			(-)0.4	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)1mA, I_E = 0$	(-)60			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1mA, R_{BE} = \infty$	(-)50			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)1mA, I_C = 0$	(-)6			V
Turn-on Time	t_{on}	At the test circuit		0.2		μs
Fall Time	t_f	At the test circuit	(0.1)0.3			μs
Storage Time	t_{stg}	At the test circuit	(0.7)0.9			μs

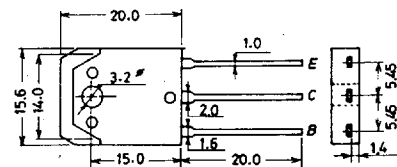
*:The 2SB827/2SD1063 are classified by 1A h_{FE} as follows:

70	Q	140	100	R	200	140	S	280
----	---	-----	-----	---	-----	-----	---	-----

Switching Time Test Circuit

(For PNP, the porality is reversed.)

Unit (Resistance : Ω , Capacitance : F)

Package Dimensions 2022
(unit:mm)

E: Emitter
C: Collector
B: Base
SANYO: T03PB

SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

