


		<h1 style="text-align: center;">ABS2 THRU ABS10</h1>						
		Single Phase 1.0 AMP. Glass Passivated Bridge Rectifiers						Voltage Range 200 to 1000 Volts Current 1.0 Ampere
Features <ul style="list-style-type: none"> ✧ Glass passivated junction ✧ Ideal for printed circuit board ✧ Reliable low cost construction utilizing molded plastic technique ✧ High temperature soldering guaranteed: 260°C / 10 seconds / 0.375" (9.5mm) lead length at 5 lbs., (2.3 kg) tension ✧ Small size, simple installation Leads solderable per MIL-STD-202, Method 208 ✧ High surge current capability 		Thin Mini-Dip						
								
		Dimensions in inches and (millimeters)						
Maximum Ratings and Electrical Characteristics								
Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%								
Type Number	Symbol	ABS2	ABS4	ABS6	ABS8	ABS10	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current On glass-epoxy P.C.B. On aluminum substrate	$I_{(AV)}$	0.8				1.0		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30						A
Maximum Instantaneous Forward Voltage @ 0.4A	V_F	0.95						V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage	I_R	10						μA μA
Typical Thermal resistance Junction to Lead On aluminum substrate On Glass-Epoxy substrate	$R_{\theta_{JL}}$ $R_{\theta_{JA}}$	25 62.5 80						$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_J	-55 to +150						$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150						$^\circ\text{C}$

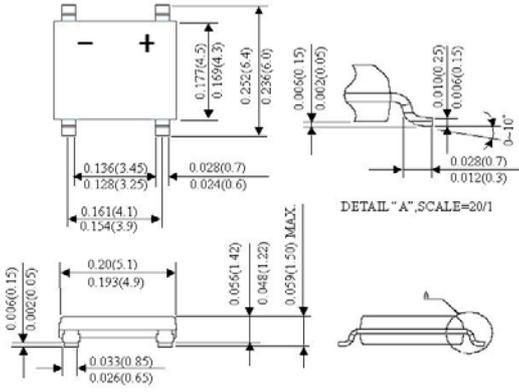

RATINGS AND CHARACTERISTIC CURVES (ABS2 THRU ABS10)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

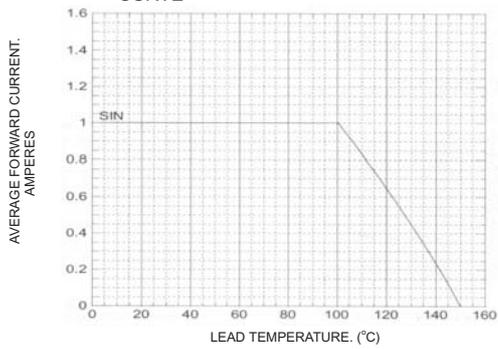


FIG.2- TYPICAL FORWARD CHARACTERISTICS

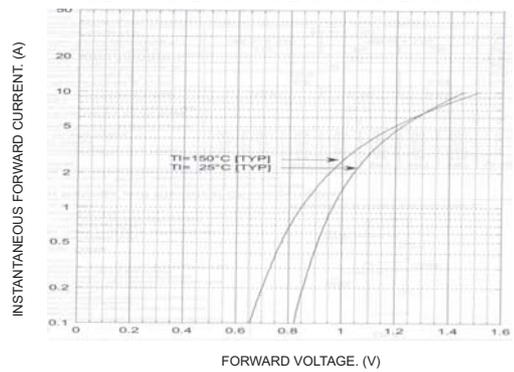


FIG.3- MAXIMUM FORWARD CURRENT DERATING CURVE

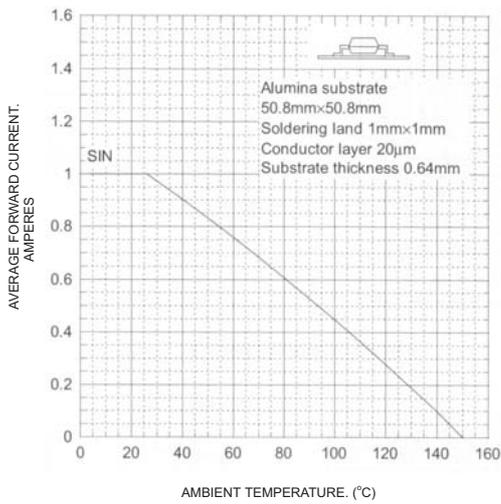


FIG.4- FORWARD POWER DISSIPATION

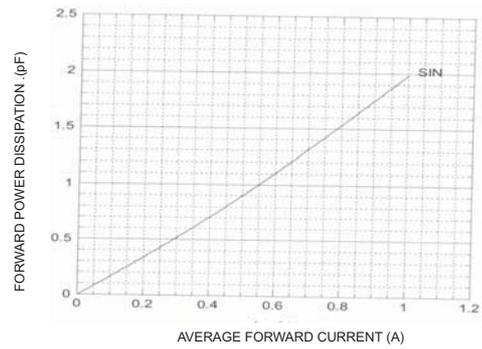


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

