



1. Mechanical Dimensions:

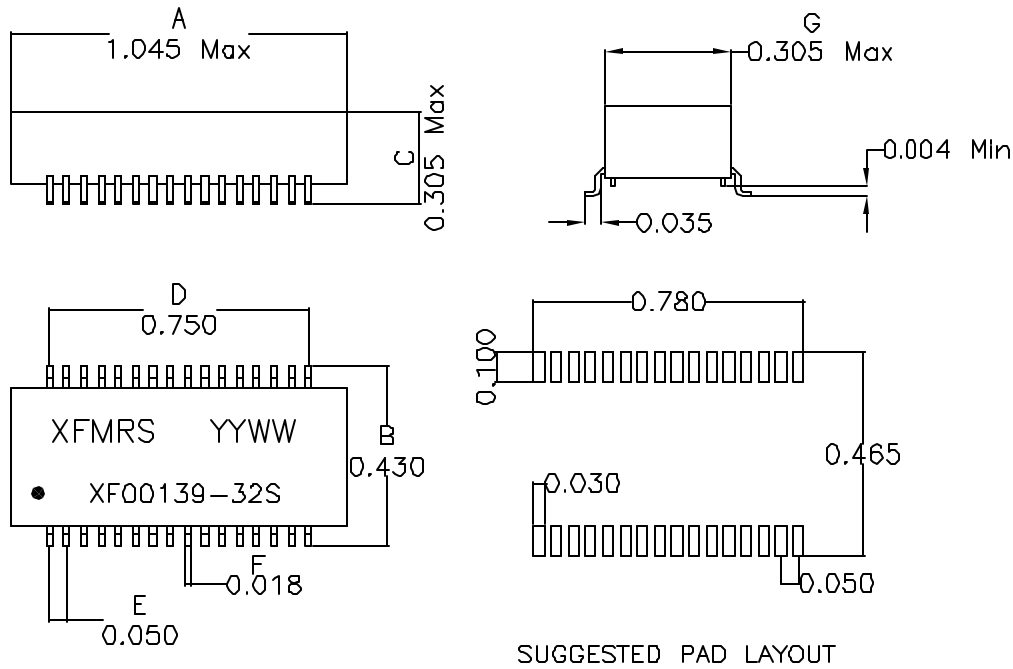

3. Electrical Specifications: @25°C

ISOLATION: 1500Vrms (PRI to SEC)
 TURNS RATIO: (PRI:SEC)=1:1±2%
 SEC OCL: 1.20mH Min @10KHz 50mV
 CW/W: 30pF Max @10KHz 50mV (PRI/SEC)
 SEC LL: 0.6uH Max @100KHz 50mV, Short PRI
 CROSSTALK: -60dB Typ

2. Schematic:

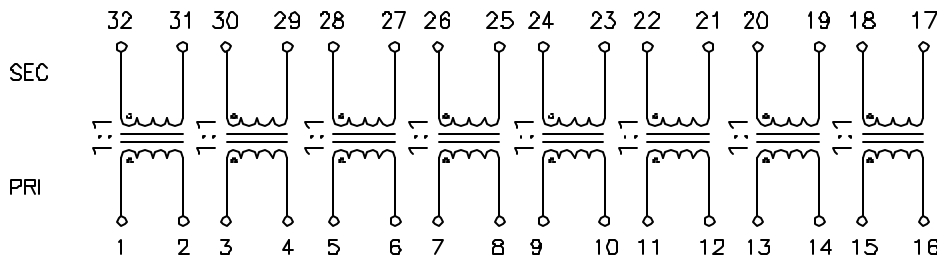

Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151558
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- SMD Lead Coplanarity: ±0.004"(0.102mm)
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

DOC REV: A/2

PROPRIETARY

Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.

XFMRs Inc www.XFMRs.com		Title: T1/E1/CEPT QUAD PORT	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF00139-32S		REV. A
	DWN.	罗振江	Jun-06-05
	CHK.	廖玉坤	Jun-06-05
SHEET 1 OF 1	APP.	BW	Jun-06-05