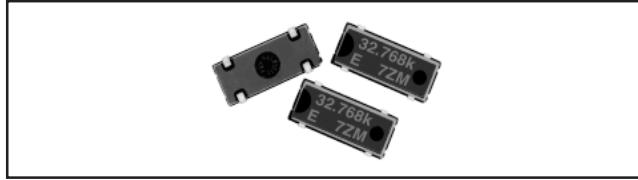


## Watch Crystals

### Surface Mount 32.768KHz

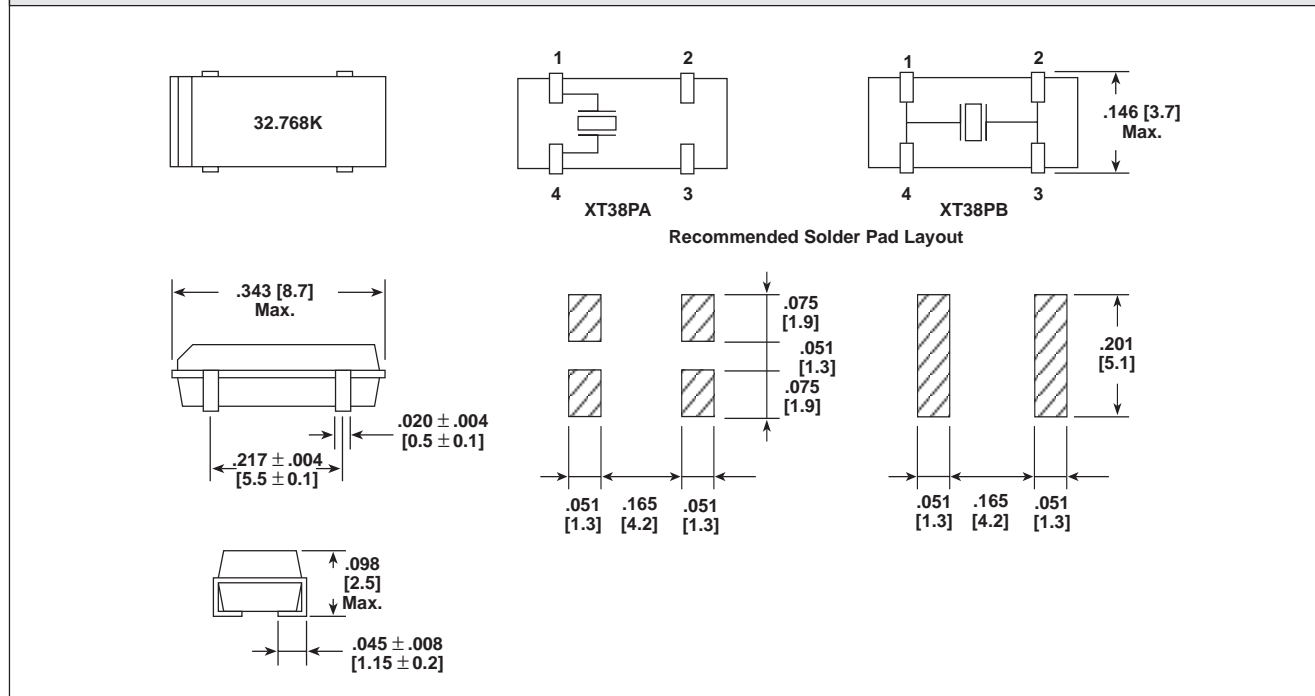

**FEATURES**

- Miniature package.
- Economical cost.

**STANDARD SPECIFICATIONS**

**Operating Temperature Range:** - 40°C to + 85°C.  
**Frequency Tolerance:** ± 20PPM.  
**Frequency Stability:** - 0.043PPM/°C<sup>2</sup> maximum.  
**Nominal Frequency:** 25°C to ± 5°C.

**Load Capacitance:** 12.5pF.  
**Drive Level:** 1μW maximum.  
**Shunt Capacitance:** 1.0pF typical.  
**Tape and Reel:** 3000 pieces.

**DIMENSIONAL CONFIGURATIONS [Numbers in brackets indicate millimeters]**

**HOW TO ORDER**

XT38P MODEL	A PAD LAYOUT	32.768K FREQUENCY/KHZ
	<div style="border: 1px solid black; display: inline-block; padding: 2px;">A or B</div>	