


MINI RECEIVER MODULES


OED-MRM790-2F

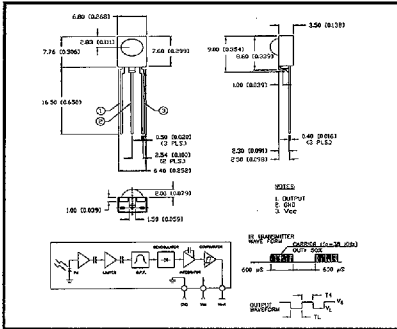

Package Style	Limits of Safe Operation			
	Vcc (max)	Icc (max)	t-opr (C°)	t-str (C°)
Molded Lens Side Firing	6.0	3mA	-20 ~ +75	-20 ~ +85

Vcc (max) (V)	Icc (max) (mA)	Detecting Distance m (min)	Angle (degrees)	λ P (nm)	Center Frequency KHz	Band Width KHz
5.5	3.0	8	+50	940	38	3

OED-MRM791-2F

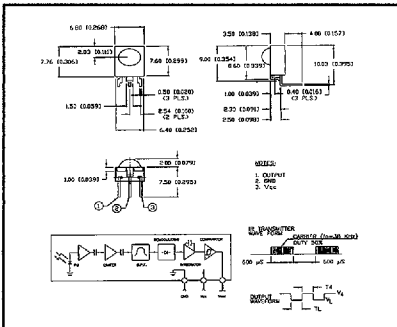

Package Style	Limits of Safe Operation			
	Vcc (max)	Icc (max)	t-opr (C°)	t-str (C°)
Molded Lens Right Angle Lead	6.0	3mA	-20 ~ +75	-20 ~ +85

Vcc (max) (V)	Icc (max) (ma)	Detecting Distance m (min)	Angle (degrees)	λ P (nm)	Center Frequency KHz	Band Width KHz
5.5	3.0	8	+50	940	38	3