


Shape

KSS-1201-16
KSS-1203-16



Shape


KSS-1206



Model Number	KSS-1201-16	KSS-1203-16
Rated Voltage (Vo-p)	1.5	3.5
Operating Voltage Range (Vo-p)	1.0 ~ 2.0	3.0 ~ 5.0
Current Consumption (mA)	Max. 35	Max. 70
Coil Resistance (Ω)	16.0 ± 2.4	
Sound Pressure Level (dBA)	Min. 85dBA(Typical 91)@10cm	
Rated Frequency (Hz)	2048	
Operating Temperature (°C)	-20 ~ +60	
Storage Temperature (°C)	-30 ~ +70	
Weight (Gram)	2.0	
Material	PPO	


Model Number	KSS-1206
Rated Voltage (Vo-p)	5.0
Operating Voltage Range (Vo-p)	4.0 ~ 8.0
Current Consumption (mA)	Max. 60
Coil Resistance (Ω)	45.0 ± 6.7
Sound Pressure Level (dBA)	Min. 85dBA(Typical 92)@10cm
Rated Frequency (Hz)	2400
Operating Temperature (°C)	-20 ~ +60
Storage Temperature (°C)	-30 ~ +70
Weight (Gram)	2.0
Material	PPO

Dimension

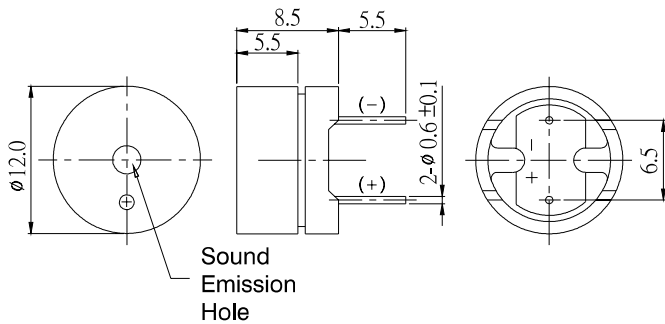

Tol : ±0.5 Unit : mm

Dimension


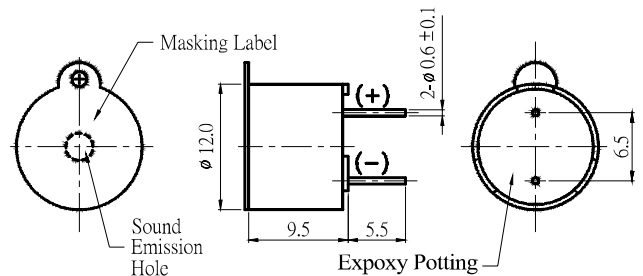


Tol : ±0.5 Unit : mm

Characteristic

KSS-1201-16

KSS-1203-16

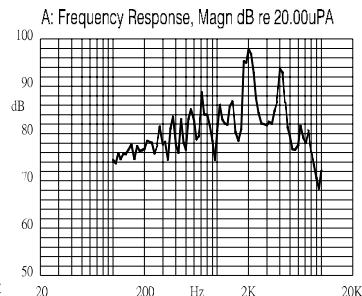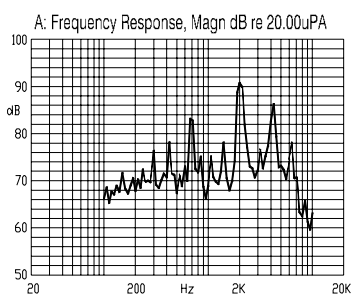

Characteristic

