

## 1 5/16" (33.3 mm) Industrial Single Turn, Bushing Mount, Conductive Plastic



### FEATURES

- Center tap available
- Continuous rotation and mechanical stops both standard
- Suitable model for all types of industrial applications
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

### ELECTRICAL SPECIFICATIONS

PARAMETER	MIL-PRF-39023 TEST PROCEDURES APPLY	
	STANDARD	SPECIAL
Ohmic Value Range	1 kΩ to 50 kΩ	1 kΩ to 50 kΩ
Tolerance	± 10 %	± 5 %
Linearity (Independent)	STANDARD	BEST PRACTICAL
	± 0.5 %	± 0.25 %
Output Smoothness	0.1 % maximum	
Power Rating	40 °C ambient 2 W derated to zero at 125 °C	
Electrical Angle		
Continuous	345° ± 4°	
Stops	340° ± 5°	
Insulation Resistance	1000 MΩ minimum at 500 V <sub>DC</sub>	
Dielectric Strength	1000 V <sub>RMS</sub> , 60 Hz	
Absolute Minimum Resistance	1.0 % of total resistance	
Minimum Voltage	0.5 % maximum	
Temperature Coefficient of Resistance	± 600 ppm/°C maximum	

### MATERIAL SPECIFICATIONS

Housing	Molded glass filled thermoplastic
Rear Lid	Glass filled thermoset plastic
Shaft	Stainless steel, non-magnetic
Terminals	Brass, plated for solderability, non-passivated
Mount Hardware	
Lockwasher Internal Tooth:	Steel, nickel plated
Panel nut:	Brass, nickel plated

### ENVIRONMENTAL SPECIFICATIONS

Vibration	15 Gs thru 2000 Hz
Shock	50 g
Salt Spray	48 h
Rotational Life	
Shaft Revolutions	2 million
Operating Temperature Range	- 55 °C to + 125 °C

### ORDERING INFORMATION/DESCRIPTION

138	B	0	0	20K	BO10
MODEL	BUSHING MOUNT	MECHANICAL OPTIONS	OTHER OPTIONAL FEATURES	RESISTANCE CODE	PACKAGING
		0. Continuous 2. Stops	0. Standard (end taps) 1. Center tap (within 5° of electrical center)		Box of 10 pieces
Other characteristics will be standard as described on this specification sheet. If special characteristics are required such as special linearity tolerance, special resistance tolerance, non-linear functions, etc., please state these on your order.					

### SAP PART NUMBERING GUIDELINES

138	B	2	1	103	B10
MODEL	STYLE	MECHANICAL OPTIONS	FEATURES	OHMIC VALUE	PACKAGING
		With stops	With center tap		Box of 10 pieces






## 1 5/16" (33.3 mm) Industrial Single Turn, Bushing Mount, Conductive Plastic

Vishay Spectrol


### DIMENSIONS in inches (millimeters)

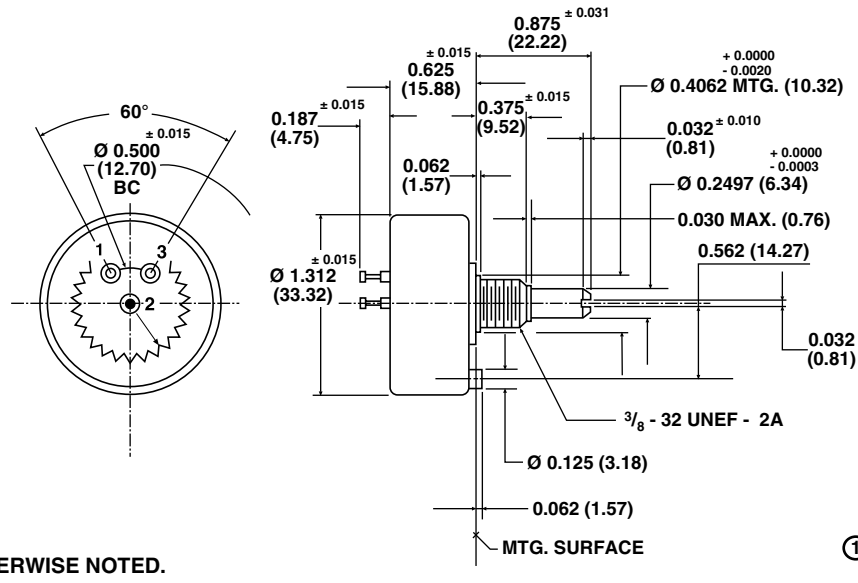

TOLERANCES: UNLESS OTHERWISE NOTED.  
DECIMALS ± 0.005 ANGLES ± 2°

MECHANICAL SPECIFICATIONS		
PARAMETER		
Rotation	360° (continuous) 340° ± 5° stops	
Bearing Type	Sleeve	
Torque (Maximums)	<b>STARTING</b> 1.0 oz. - in (72 g - cm)	<b>RUNNING</b> 0.7 oz. - in (50.40 g - cm)
Runouts (Maximums)		
Shaft Runout (TIR)	0.002" (0.05 mm)	
Pilot Dia. Runout (TIR)	0.003" (0.08 mm)	
Lateral Runout (TIR)	0.005" (0.13 mm)	
Shaft End Play	0.008" (0.20 mm)	
Shaft Radial Play	0.003" (0.08 mm)	
Weight	1.0 oz. maximum (28.35 g)	
Stop Strength	8.0 in - lbs (9.21 kg - cm) (stops version only)	

### POWER RATING CHART

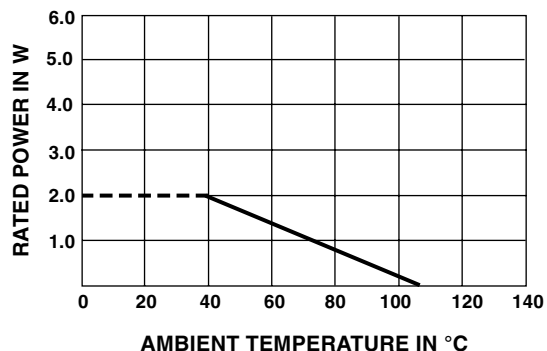

### MARKING

#### Unit Identification

Units shall be marked with Vishay Spectrol name, model number, resistance and tolerance, linearity, terminal identification, and data code Applicable test procedures: MIL-R-39023





### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.