

## AUDIO CABLE - GAC-1

583-005


**PRODUCT  
SPECIFICATION**
Sheet No. **PS 0003**

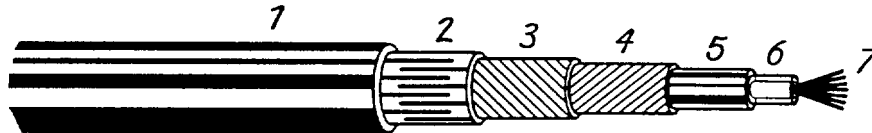
Date : 25.11.93

Issue No. 4

Sheet 1 of 1

Signature

Deltron Part No.	<b>438-0100</b>	<b>BLACK</b>
	<b>438-0200</b>	<b>BLUE</b>
	<b>438-0500</b>	<b>RED</b>
	<b>438-0700</b>	<b>YELLOW</b>

**Dimensions**


- |                          |  |
|--------------------------|--|
| 1 - JACKET               | PVC, Ø5,3mm<br>(imprinting: Gotham GAC-1 / unbalanced) |
| 2 - VISCOSE SEPARATION   |  |
| 3 - SHIELD NO. 1         | Bare copper wire (0,10mm)                              |
| 4 - SHIELD NO. 2         | Bare copper wire (0,10mm)                              |
| 5 - CONDUCTIVE PVC LAYER |  |
| 6 - INSULATION (COND.)   | PE insulation, Ø1,25mm                                 |
| 7 - CONDUCTOR            | Bare copper wires 48 x 0,07mm (0,19mm <sup>2</sup> )   |

**Description**

Professional very low noise audio cable. Specially designed for instruments and other unbalanced lines where high RF protection and very low noise are desired. Double reussen shielding and very high flexible PVC material in combination with unique construction are the topics of this product. The conductive PVC layer will save from motion generated (static) noise.

**Features**
**TECHNICAL SPECIFICATION**

Conductor resistance	<= 110 Ohm/km
Shielding resistance	<= 28 Ohm/km
Capacitance	<= 160 nF/km
Test Voltage	1000 Veff (2 mins)

**ORDERING DATA**

Colours	black, blue, red, and yellow
Reels at	100m EW250
Weight/reel	4,150 kg
Weight/metre	0,038 kg