
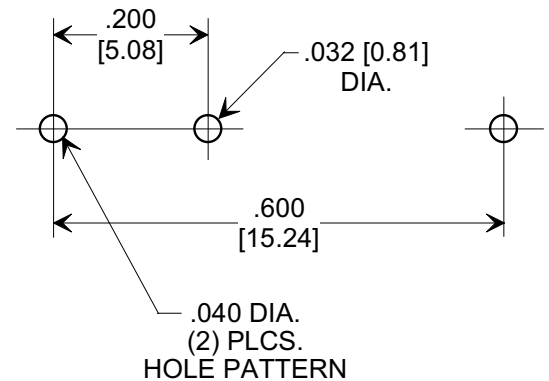
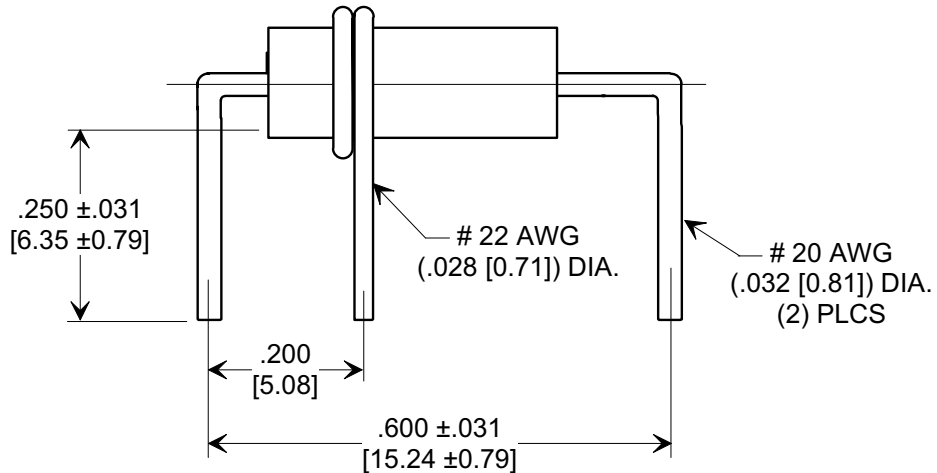
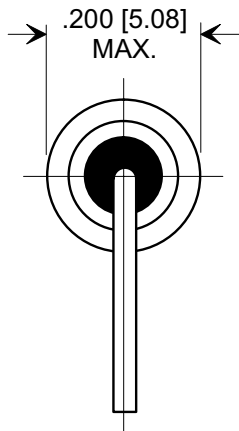
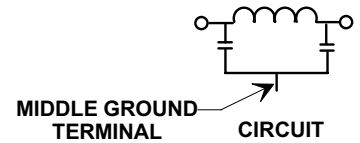



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.



Cx (pF)	WORKING VOLTAGE		IR (MIN.)	CURRENT Idc (A)	TYPICAL NO LOAD INSERTION LOSS @ 25°C (dB) PER MIL-STD-220		
	+85°C 250 @ 60 Hz VAC	+125°C 200 VDC			10 MHz	100 MHz	1 GHz
1500/3000			10 G Ω	10	5	45	70

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20000508-1-01	0		--TOLERANCES-- Unless Otherwise Specified	Title P.C. BOARD MOUNT	
			DECIMAL ± .031 [0.79]	π TYPE LOW PASS FILTER	
			ANGLES ± 	Drawn S.M. 05-08-00	Scale 4 X
			TUSONIX TUCSON, ARIZONA	Approved T.C. 05-08-00	
				A	4100-057