


# SocketModem® Cell

## GPRS Cellular Modem




The SocketModem® Cell cellular modem is a complete, ready-to-integrate communications device that offers standards-based quad-band GSM/GPRS Class 10 performance. This quick-to-market communications device allows developers to add wireless communication to products with a minimum of development time and expense. The SocketModem Cell cellular modem is based on industry-standard open interfaces and utilizes Multi-Tech's Universal Socket design.

### Features

- GPRS Class 10
- Quad-band GSM 850/900/1800/1900 MHz
- Packet data up to 85.6K bps
- Universal Socket connectivity
- Circuit-switched data up to 14,400 bps transparent and non-transparent
- Short Message Services (SMS)
- Advanced management features include phone book management, fixed dialing number, real time clock and alarm management
- UFL antenna connector and SIM socket
- Serial interface supports DTE speeds to 115.2K bps
- AT command compatible
- MNP 2 error correction, V.42bis compression
- Two-year warranty

### Universal Socket Benefits

- Interchangeable communications devices
- Quick-to-market
- Global approvals
- Easy migration to future networks

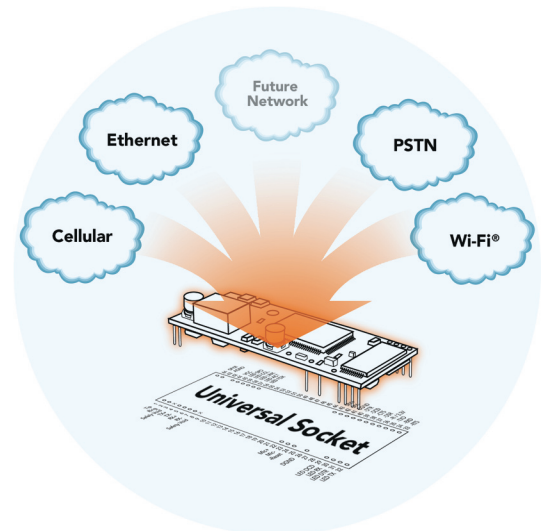

## Highlights

**Applications.** The SocketModem Cell cellular modem is targeted at applications that periodically need to send or receive data over a wireless network. It is ideal for:


- Appliances
- Asset tracking
- ATM terminals
- Automotive
- Data collection
- Industrial and medical remote monitoring systems
- Remote diagnostics
- Remote metering
- Security systems
- Vending/gaming machines
- Other devices requiring wireless connectivity

**Universal Socket Connectivity.** Multi-Tech's Universal Socket is a flexible, comm-port architecture that provides cellular, Ethernet, PSTN or Wi-Fi network access with interchangeable communications devices. This means you can utilize one system design and populate it with your connectivity device of choice accommodating multiple connectivity requirements. In addition, you are assured a seamless migration to future technologies.

**Internet-enabled.** The SocketModem Cell cellular modem includes an embedded TCP/IP protocol stack to bring Internet connectivity to any device without making changes to its hardware design. Using the Internet protocols and the wireless connection to an IP network, it sends and receives data over the Internet.

**Reduces Development Time.** The SocketModem Cell cellular modem enhances your product while you focus on developing its core features. It actually provides faster time-to-market because it relieves the burden and expense of obtaining PTCRB and RF approvals.

**SocketModem Cell Pin-Out.** The SocketModem Cell cellular modem interfaces easily with existing products through a standard serial communication channel. The serial DTE channel is capable of transfer speeds to 115.2K bps and can be interfaced directly to a UART or microcontroller. The complete on-board RF transceiver interfaces with an antenna for direct connection to wireless SMS, circuit-switched dial-up, or packet data networks. It also includes an onboard LED to display network status.

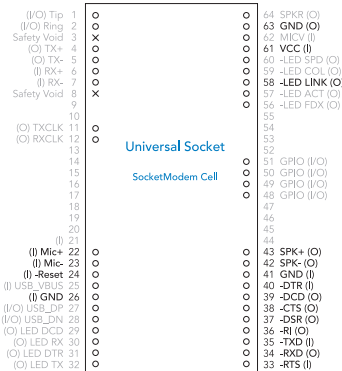

**Developer's Kit.** The Developer's Kit allows you to plug in the communications device and use it for testing, programming and evaluation. The kit includes one development board with RS-232 DB-25 connector, universal power supply, antenna and RS-232 cable.

## Specifications

### Packet Data Features

- GPRS Class 10, PBCCH support
- Coding Schemes: CS1 to CS4
- Embedded TCP/IP stack

### Circuit Switched Data Features

- Asynchronous, transparent & non-transparent up to 14.4K bps, MNP2 & V.42 bis

### SMS Features

- Text & PDU, Point-to-Point, cell broadcast

### Connectors

- Antenna: UFL
- SIM: Standard 3V SIM receptacle

### IP Protocols Supported

- FTP, HTTP, POP3, SMTP, TCP (Client & Server), & UDP

### Power Requirements

- 5VDC; 49mA sleep (.25W @ 5VDC), 113mA typical (.56W @ 5VDC), 240mA maximum (1.2W @ 5VDC), 1.10A peak

### Physical Description

- 3.1" L x 1.4" W x 0.5" H; 1 oz.  
(7.8 cm x 3.5 cm x 1.2 cm; 28 g)

### Operating Environment

- 40° to +85° C

### Certifications

- CE Mark, R&TTE
- EMC: FCC Part 15, 22, 24, EN 301 489-1, EN 301 489-7, RSS 132, 133
- Safety: cUL 60950-1, EN 60950-1, UL 60950-1, AS/NZS 60950-1
- Network: PTCRB
- RoHS Compliant

## Ordering Information

Product	Description	Region
MTSMC-G2*	GSM/GPRS Modem	Global
MTSMC-G2-ED†	GSM/GPRS Modem	Global
MTSMC-G2-V*	GSM/GPRS Modem with Voice	Global
MTSMC-G2-V-ED†	GSM/GPRS Modem with Voice	Global

\* Quad-band Modem, 850/1900 MHz default  
† Quad-band Modem, 900/1800 MHz default

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

**Trademarks / Registered Trademarks:** SocketModem, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

**World Headquarters**  
Tel: (763) 785-3500  
(800) 328-9717  
www.multitech.com

**EMEA Headquarters**  
Multi-Tech Systems (EMEA)  
United Kingdom  
Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)  
France  
Tel: +(33) 1 49 19 22 06

