



This is a sample photo.

Order symbol		PC 125/125 HG
El. number	EAN-code	6418074022127
Sweden		
Denmark		
Finland		
3420335		

Including


Enclosure cover with cover screws, body with mounting screws and gasket.

Product Properties

USA: UL Type 1, 4, 4X, 6

EURO: IP 66/67 (EN 60529); IK 08 (EN 50102)

MNX PC

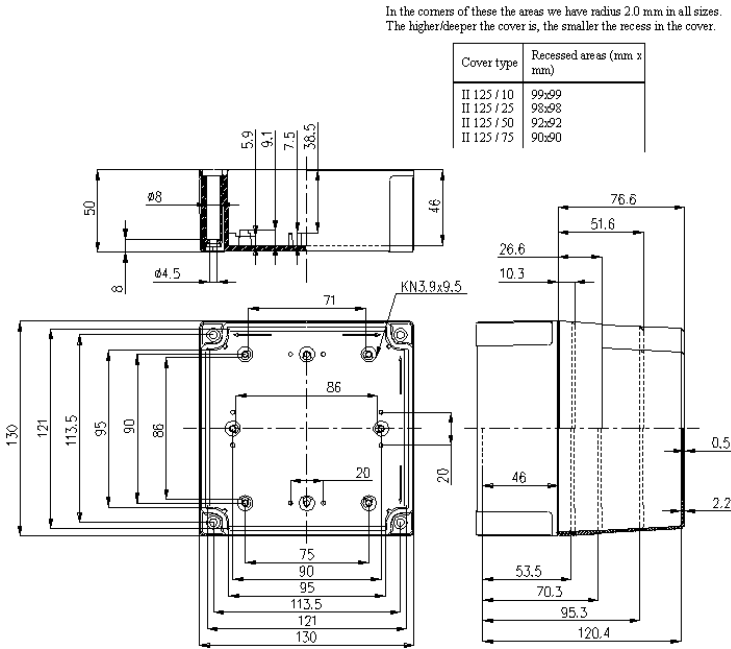

Technical Information of Product Group

Standard colour:	RAL 7035	Temp. range-in cont. use:	Max. +80 °C
Flame resistance:	UL94-5V (UL 746 C 5)	Temp. range-of material:	- 40 °C - + 120 °C

- Accessories**
- Sealing bushing DP 14553
 - Condensation water plug MB 12189
 - Mounting screw KN 3.9x9.5
 - Ventilation device MB 10631
 - Inspection window L 04
 - Cover screw SS 14551H
 - Mounting plate MIV 125
 - DIN-Rail MIN 10
 - DIN-Rail MIV 10
 - Front plate FP A 125/130
 - Hinge TH A