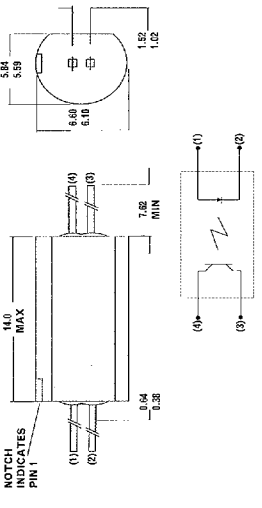
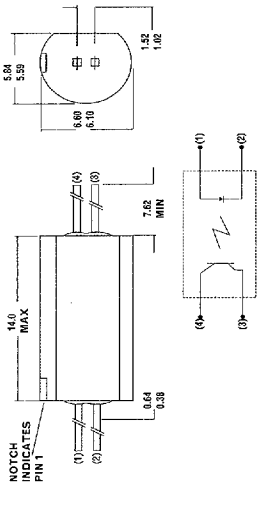
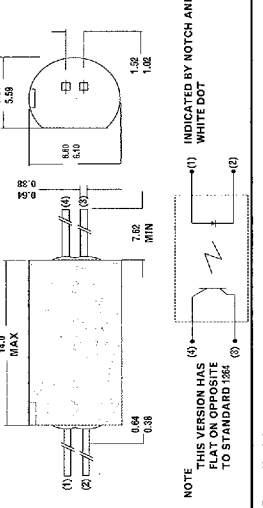
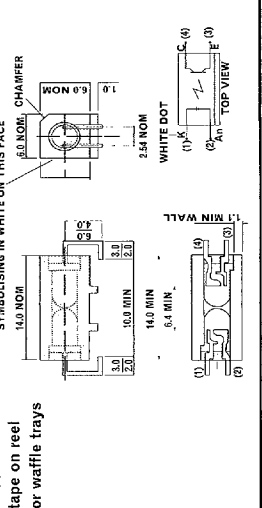


10KV BASEEFA CERTIFIED TUBULAR OPTO ISOLATORS

20

DESCRIPTION	TYPE NO.	Diode		Transistor			Coupled		DIMENSIONS/CONNECTIONS
		V _f @I _f 20mA Volts max	I _r @V _r = 2V µA max	V _{BR} (CEO) @I _C =1mA Volts min	V _{BR} (ECO) @I _E =100µA Volts min	I _{CEO} @V _{CE} =10V nA max	CTR% V _{CE} = 5 VOLTS	V _{CE} (SAT) Volts max I _f = 10mA I _C = 1.6 mA	
10KV TUBULAR BASEEFA CERTIFIED BAS.EX 89C2096U ● 3 POLARITY OPTIONS	 OP1110	A	1.5	100	30	5	100	0.4	
		B							
		C							
		D							
	 OP11264	A	1.5	100	30	5	100	0.4	
		B							
		C							
		D							
	 OP11264	AR	1.5	100	30	5	100	0.4	
		BR							
		CR							
		DR							
NEW SURFACE MOUNT 10KV TUBULAR BASEEFA CERTIFIED BAS.95C2215U EExiaIc	 OP11000	A	1.3	100	35	5.0	10	0.4	
		B							
		C							
		D							

1342418 0000251 244

**BEDFORD OPTO
TECHNOLOGY LTD**

10KV BASEEFA CERTIFIED TUBULAR OPTO ISOLATORS

