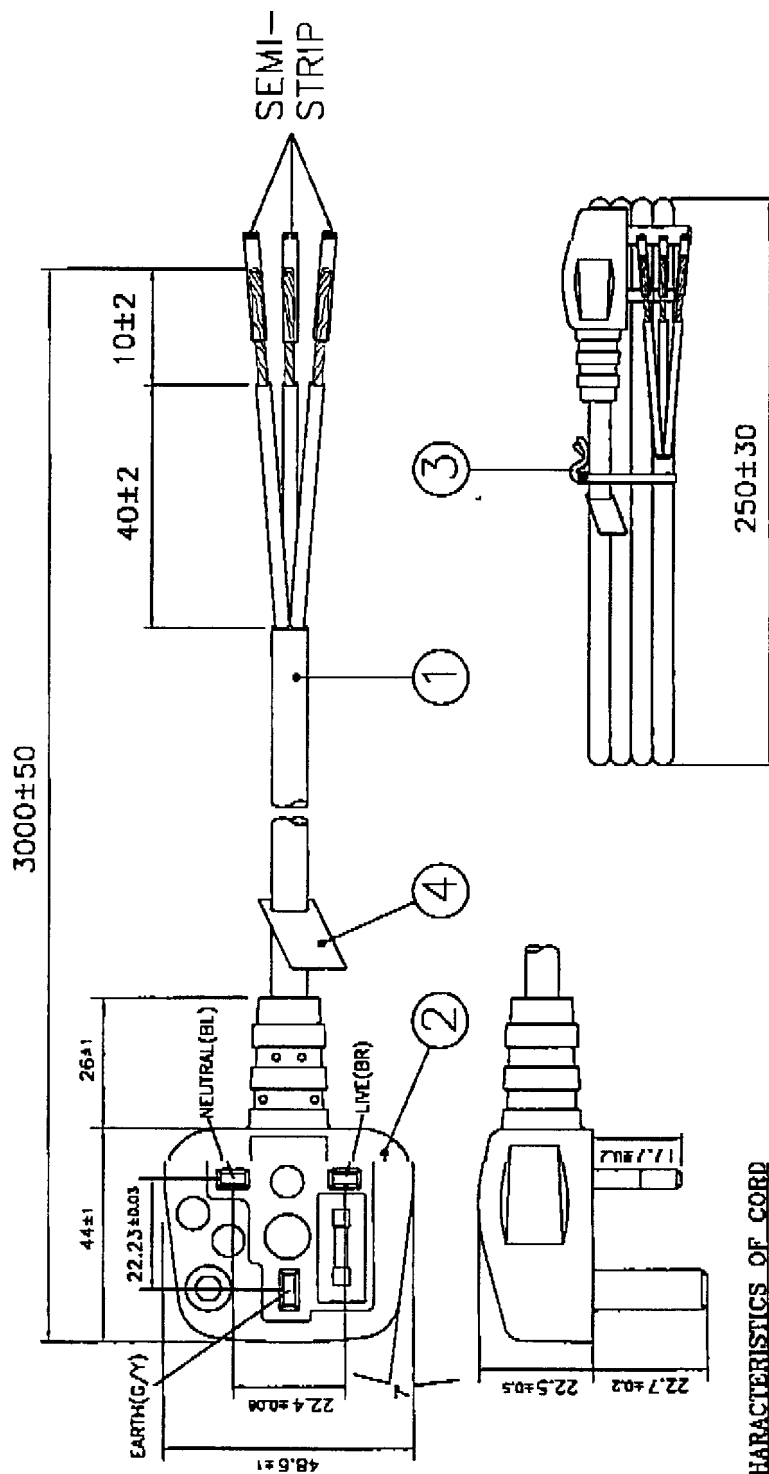


439-289/290

1812

**DIMENSIONS AND CHARACTERISTICS OF CORD**

RATED VOLTAGE : 30V/500V

NUMBER OF CORES : 3

CONDUCTOR

NOMINAL CROSS SECTIONAL AREA

CONSTRUCTION : 7/0.2 mm²

THICKNESS OF INSULATION : 0.6 mm

THICKNESS OF SHEATH : 0.8 mm

OVERALL DIAMETER : 6.4~8.0 mm

APPROVED SOURCE FOR CABLE

1. BICC.

2. POPE.


NOTE:

1. ALL DIMENSIONS ARE IN mm.
2. THE CORD SHALL COMPLY WITH BS 6500.
3. THE MOLDED PLUG SHALL COMPLY WITH BS 1363.

S/N	DESCRIPTION	ITEM NUMBER	QTY
4	FUSE TAG VIOLET	SA/3C	1
3	6" VINYL TIE	BLACK	1
2	MOLDED PLUG BLACK (SA)	MP5004	1
1	H05VV - F3 x 0.75 mm ²	BLACK	1
TITLE : ASTA APPROVED POWER SUPPLY CORD (SA 250V)			
SCALE N.T.S.			
Customer : FARNELL ASIA			
Customer Part Number : 439289			
Reference Number : 970702			
ISSUE 002			
Approved By: <i>[Signature]</i>	Checked By: <i>[Signature]</i>	Drawn By: RAYMOND	
Date: 28/7/97	Date: 28/7/97	Date: 28/07/97	

Voilex

2 of 2

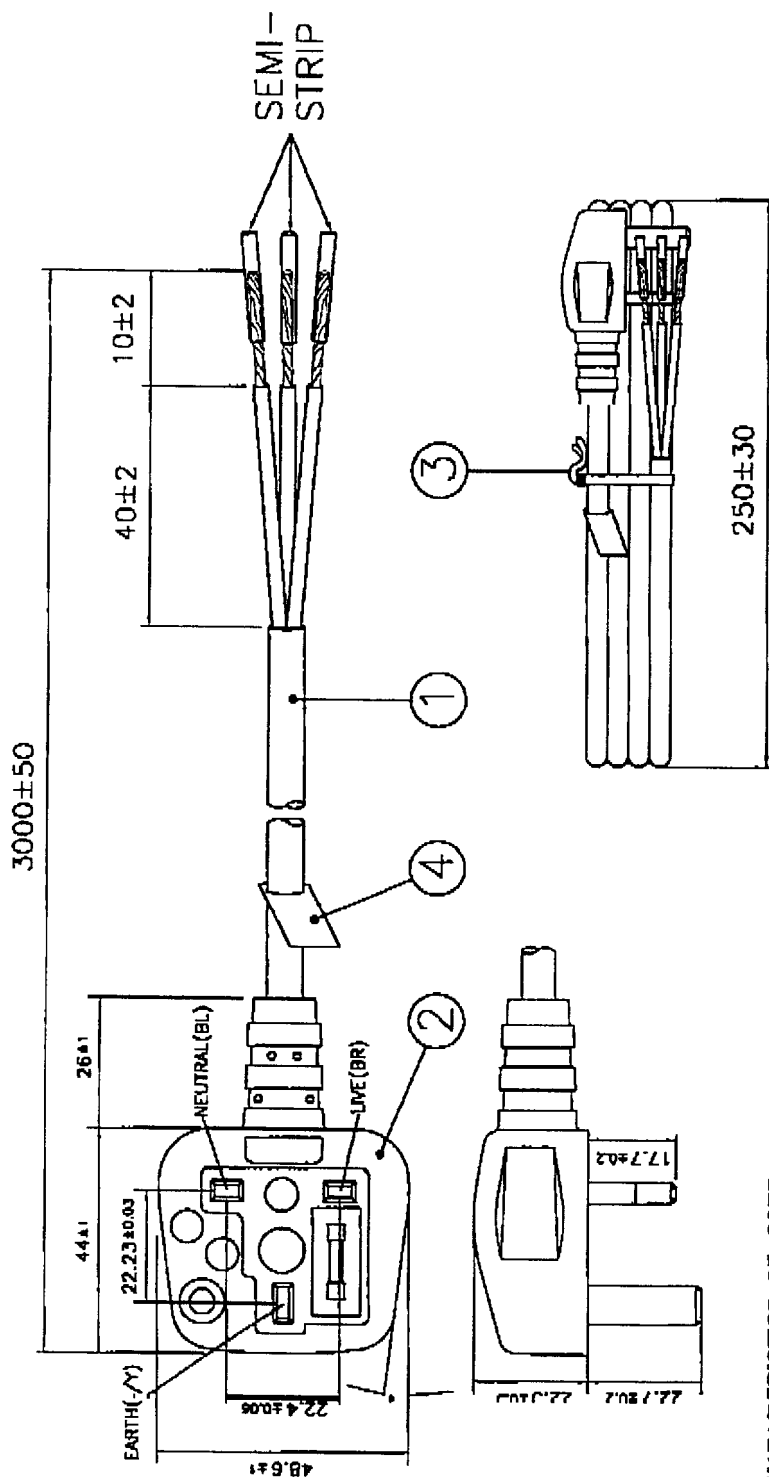**DIMENSIONS AND CHARACTERISTICS OF CORD**

RATED VOLTAGE : 300V/500V
 NUMBER OF CORES : 3

CONDUCTOR

NOMINAL CROSS SECTIONAL AREA : 1.25 mm²
 CONSTRUCTION : 40/0.2 mm
 THICKNESS OF INSULATION : 0.7 mm
 THICKNESS OF SHEATH : 0.9 mm
 OVERALL DIAMETER : 7.6~9.4 mm

APPROVED SOURCE FOR CABLE

1. BICC.

NOTE :

- ALL DIMENSIONS ARE IN mm.
- THE CORD SHALL COMPLY WITH BS 6500.
- THE MOLDED PLUG SHALL COMPLY WITH BS 1363.

4	FUSE TAG ORANGE	13A/3C	1
3	6" VINYL TIE	BLACK	1
2	MOLDED PLUG BLACK (13A)	MP5004	1
1	H05VV - F3 x 1.25 mm ²	BLACK	1
S/N	DESCRIPTION	ITEM NUMBER	QTY
Title : ASTA APPROVED POWER SUPPLY CORD (13A 250V)			
Customer : FARNELL ASIA		SCALE N.T.S.	
Customer Part Number : 439290		ISSUE	
Reference Number : 970728/3		001	
Approved By : <i>[Signature]</i>	Checked By : <i>[Signature]</i>	Drawn By : RAYMOND	
Date : 28/07/97	Date : 28/07/97	Date : 28/07/97	

Voilex